



DATA SHEET

GBJ8A~GBJ8K

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

VOLTAGE 50 to 800 Volts **CURRENT** 8.0 Ampere



Recognized File #E228882


FEATURES

- Plastic material has Underwriters Laboratory, Flammability Classification 94V-0
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed:
260°C/10 seconds/.375"(9.5mm) lead length at 5 lbs. (2.3kg) tension
- Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above

MECHANICAL DATA

Case: Reliable low cost construction utilizing molded plastic technique
Terminals: Leads solderable per MIL-STD-202, Method 208
Mounting position: Any
Mounting torque: 5 in. lb. Max.
Weight: 0.15 ounce, 4.0 grams

GBJ Unit: inch (mm)

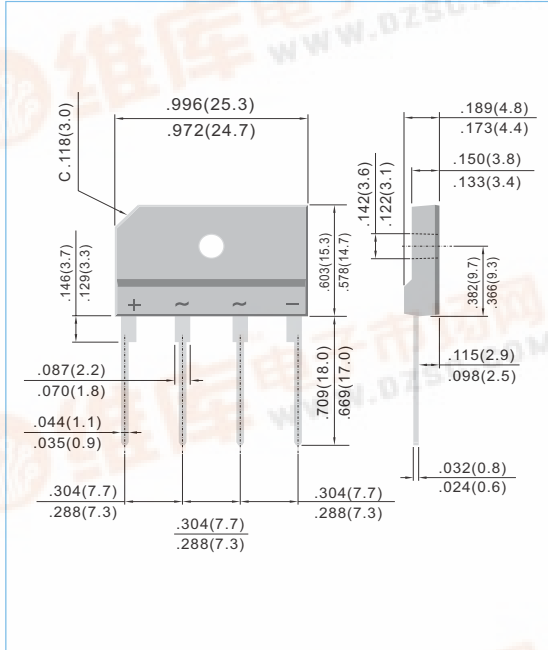

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	GBJ8A	GBJ8B	GBJ8D	GBJ8G	GBJ8J	GBJ8K	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	V
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	V
Maximum Average Forward TC=100 °C Rectified Output Current at TA=40 °C	I _{AV}				8.0 6.0			A
I ² t Rating for fusing (t<8.3ms)	I ² t				166			A ² sec
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I _{FSM}				200			Apk
Maximum Instantaneous Forward Voltage Drop per element at 4.0A	V _F				1.0			Vpk
Maximum Reverse Leakage Current at Rated @ TA=25°C Dc Blocking Voltage @ TA=100°C	I _R				5.0 500			uA
Typical Thermal Resistance per leg (Note 2) (Note 3)	R _{θJA} R _{θJC}				8.6 3.1			°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}				-55 to + 150		°C	

NOTES:

- Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
- Units Mounted in free air, no heatsink, P.C.B at 0.375"(9.5mm) lead length with 0.5 x 0.5"(12 x 12mm)copper pads.
- Units Mounted on a 2.6 x 1.4" x 0.06" thick (6.5 x 3.5 x 0.15cm) AL plate.





RATING AND CHARACTERISTIC CURVES

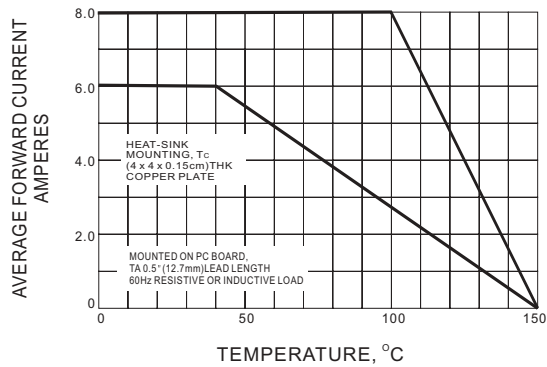


Fig.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

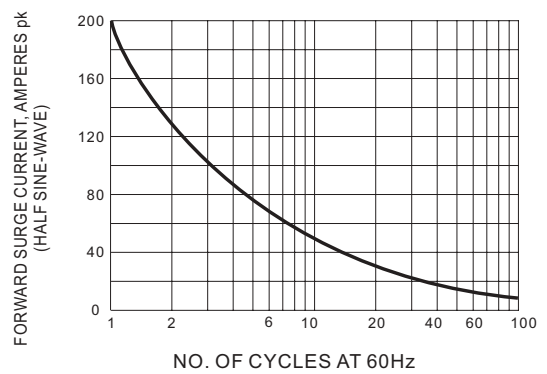


Fig.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

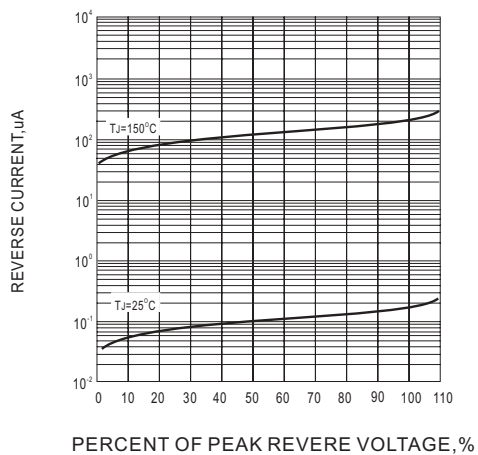


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

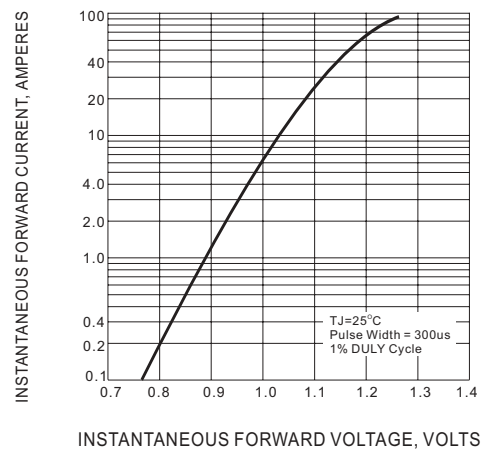


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT