





TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
GDE25-3.DC2

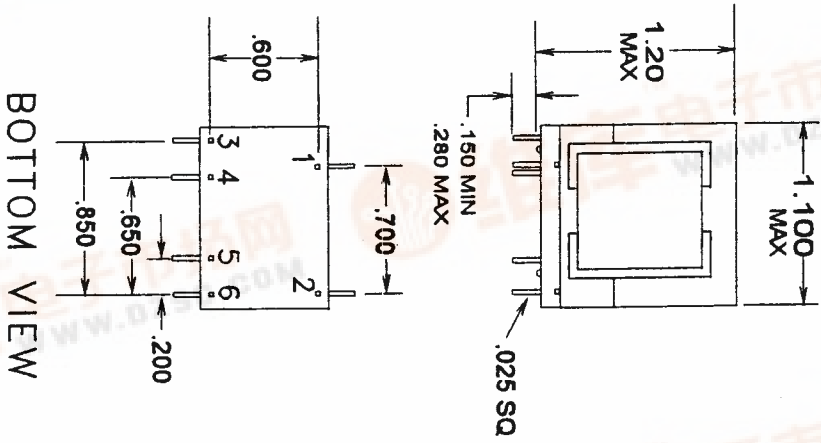

MOUNTING HOLE PATTERN TOP VIEW

BOTTOM VIEW

LAMINATION NOTES

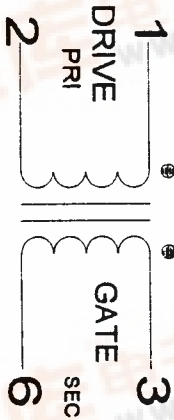

PRODUCTION TESTS

DC	TURN RATIO = 100%
RESISTANCE	(1 - 2) .875 MAX
IN OHMS	(3 - 6) .350 MAX

APPLY = .1V @ 10 KHZ PIN (1 - 2)

INDUCTANCE = 1.50 mHYS MIN

LEAKAGE INDUCTANCE = 3.50 uHYS MAX 1 TO 2 WITH 3 TO 6 SHORTED

HIPOT = 4125 VRMS 1 SEC MIN PRI TO SEC

2750 VRMS 1 SEC MIN SEC TO CORE

1375 VRMS 1 SEC MIN PRI TO CORE

CONTINUITY =

FINAL ASSEMBLY NOTES

MagneTek

PART NO. GDE25-3

