


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032  
**GDE25-4;DC2**

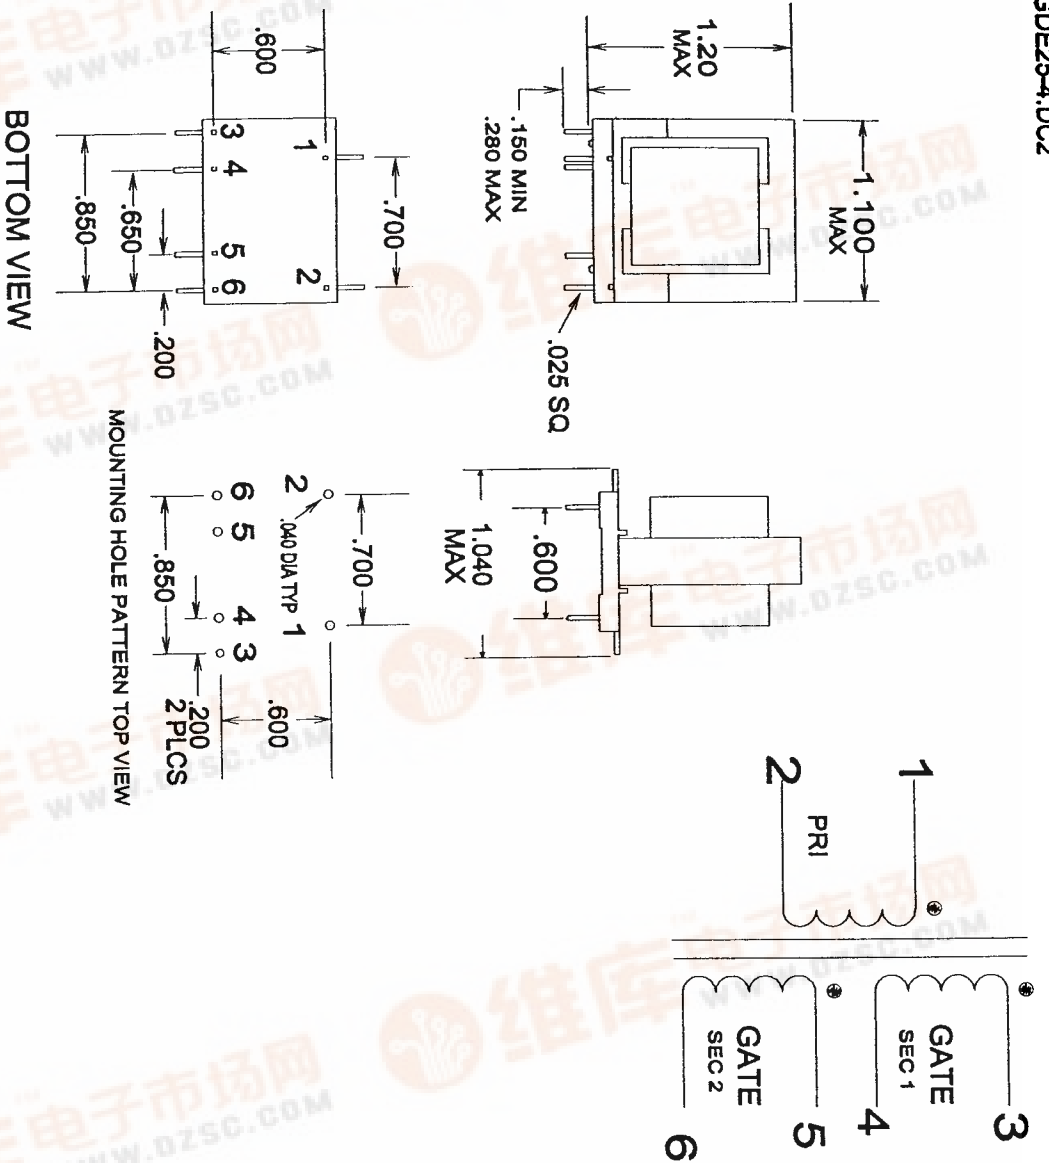

**METHOD** BUTT WITH NO GAP  
**MARKING** OUR #, DATECODE, SITECODE, B3  
 ON LABEL ON CORE

**PRODUCTION TESTS**

DC  
 TURNS RATIO = 100%

RESISTANCE	(1 - 2) .510 MAX
IN OHMS	(3 - 4) .335 MAX
	(5 - 6) .356 MAX

APPLY = .1V @ 10 KHz PIN (1 - 2)

INDUCTANCE = 1.50 MHYS MIN  
 LEAKAGE INDUCTANCE = 3.50 UHYS MAX  
 WITH 3 TO 4 SHORTED AND 5 TO 6 SHORTED

HIPOT = 4125 V P-S  
 3000 V P-C, S-C, S-S

CONTINUITY =  
 IMPREGNATION NOTES =  
 PINS MUST BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES



PART NO.: GDE25-4