


GTM CORPORATION

GM882 NPN EPITAXIAL PLANAR TRANSISTOR


Description

The GM882 is suited for the output stage of 1.5W audio, voltage regulator , and relay driver.

Package Dimension

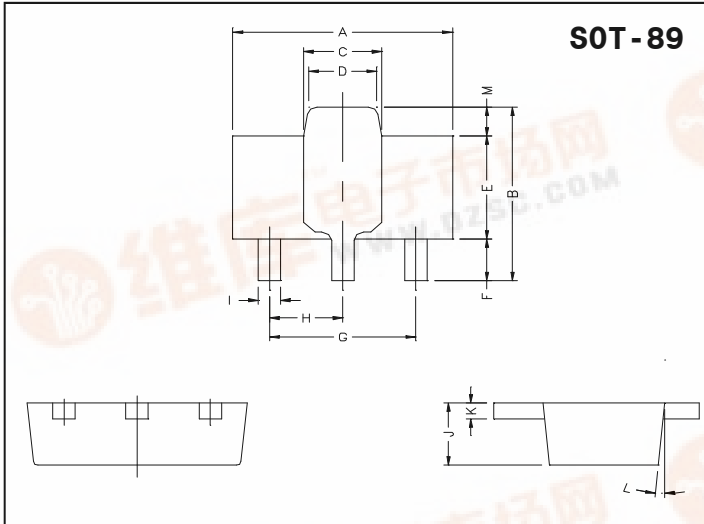

Marking :



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.4	4.6	G	3.00	REF.
B	4.05	4.25	H	1.50	REF.
C	1.50	1.70	I	0.40	0.52
D	1.30	1.50	J	1.40	1.60
E	2.40	2.60	K	0.35	0.41
F	0.89	1.20	L	5° TYP.	
			M	0.70 REF.	

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage at Ta=25	VCBO	40	V
Collector to Emitter Voltage at Ta=25	VCEO	30	V
Emitter to Base Voltage at Ta=25°C	VEBO	5.0	V
Collector Current at Ta=25°C	IC	3.0	A
Total Power Dissipation at Ta=25°C	PD	1.2	W


Characteristics at Ta = 25°C

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	40	-	-	V	IC=100uA, IE=0
BVCEO	30	-	-	V	IC=1mA, IB=0
BVEBO	5	-	-	V	IE=10uA
ICBO	-	-	1	uA	VCB=30V
IEBO	-	-	1	uA	VEB=3V
VCE(sat)	-	-	0.5	V	IC=2A, IB=0.2A
VBE(sat)	-	-	2	V	IC=2A, IB=0.2A
hFE1	30	-	-	-	VCE=2V, IC=20mA
hFE2	100	-	500	-	VCE=2V, IC=1A
FT	-	90	-	MHz	VCE=5V, IC=0.1A, f=100MHz
Cob	-	45	-	Pf	VCB=10V, IE=0, f=1MHz

Classification Of hFE

Rank	Q	P	E
Range	100-200	160-320	250-500

Characteristics Curve

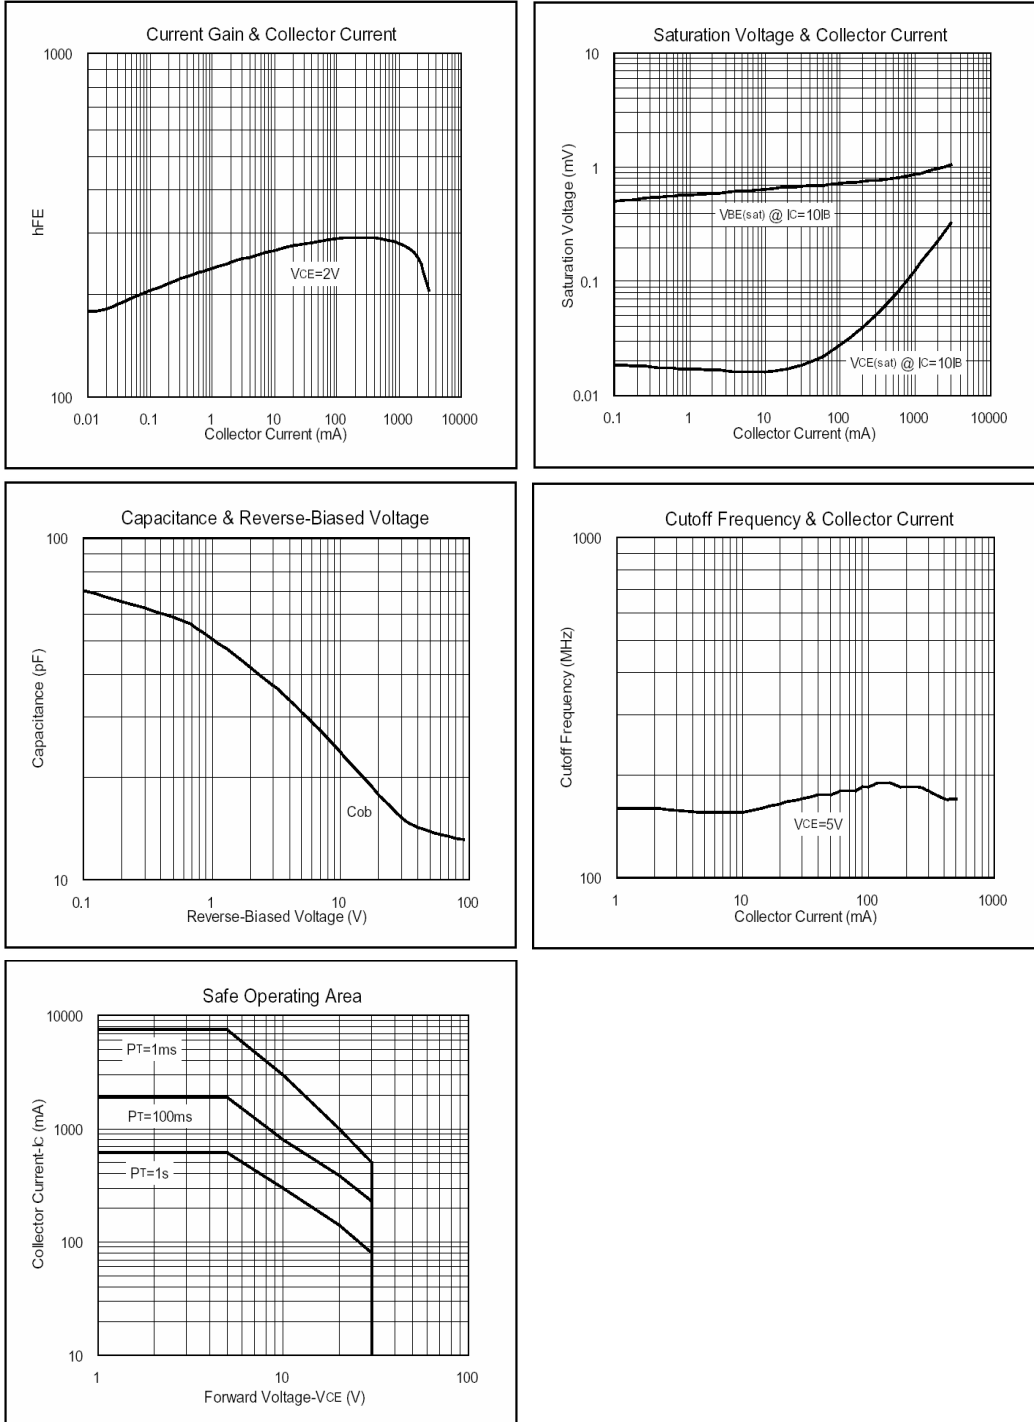

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 FAX : 86-21-38950165