

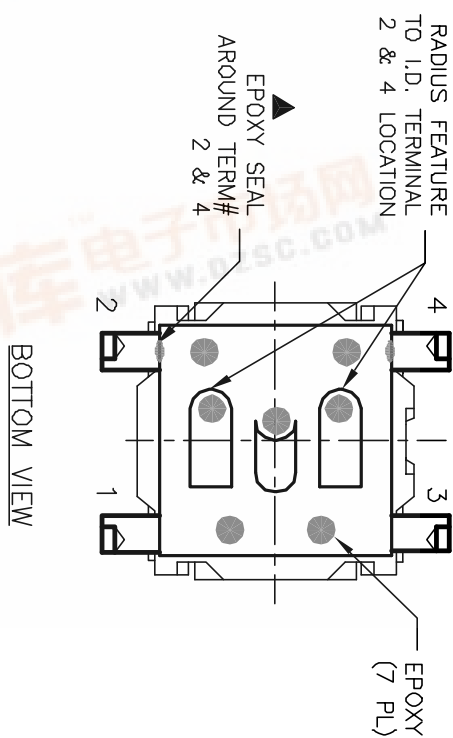
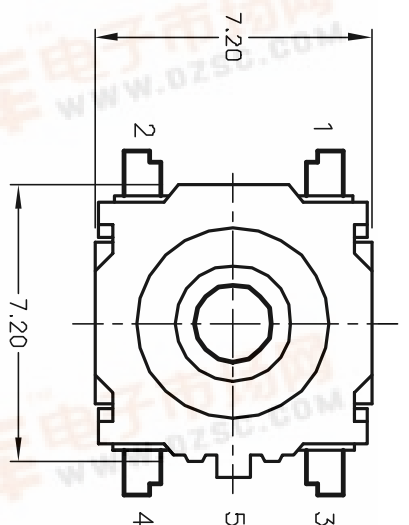


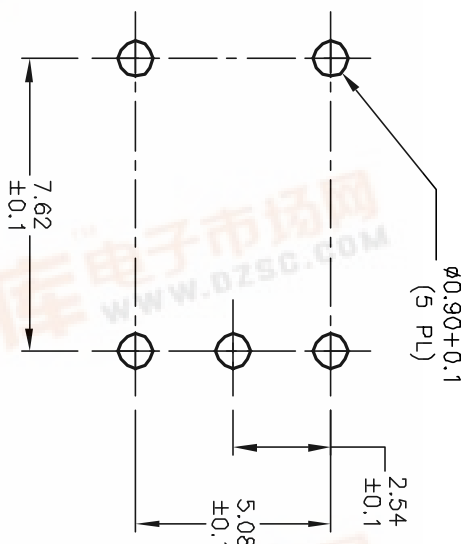



RECOMMENDED P.C.B. LAYOUT



NOTES:

CIRCUIT: SPST

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: $130 \pm 40 \text{gf}$
5. TRAVEL TO MAKE: $0.3 \text{mm} + 0.4/0.0$
6. RATING: 30mA, @12V DC
7. CONTACT RESISTANCE: 50 MILLI-OHMS (initial)
8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to $+85^\circ\text{C}$

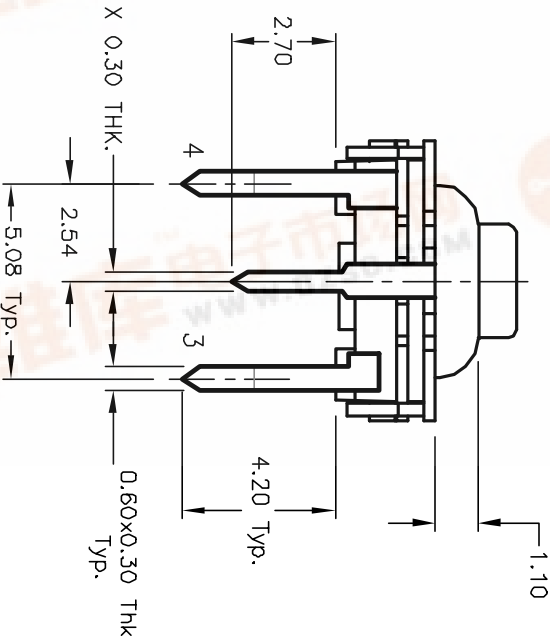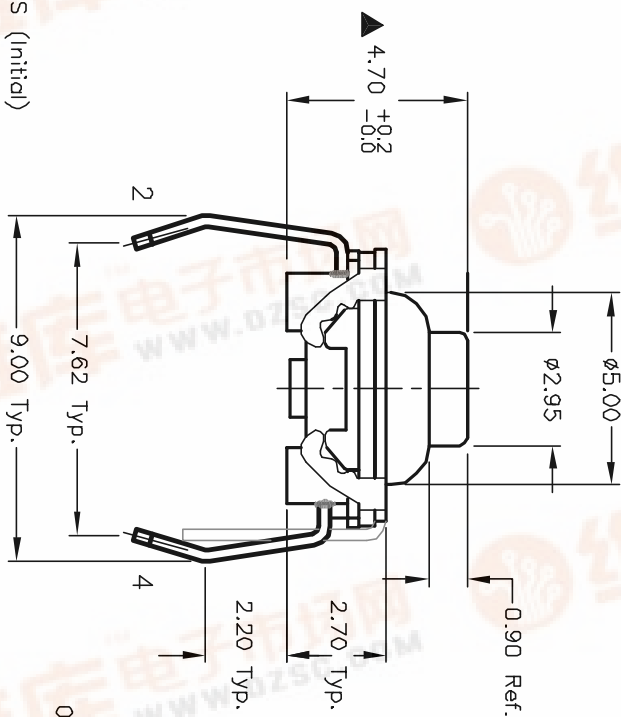**E-SWITCH®**

TITLE

GSE 4.70 F130 QP

EARTH GROUND WASHABLE TACT SWITCH

SCALE

5:1

DATE

10/2/98

DR

MM

DWG

L400100

PDF

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

查询GSE4.70F130QP供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货