

查询HMC482ST89供应商

捷多邦，专业PCB打样工厂，24小时加急出货



MICROWAVE CORPORATION v02.0106



HMC482ST89 / 482ST89E


SiGe HBT GAIN BLOCK
MMIC AMPLIFIER, DC - 5.0 GHz

Typical Applications

The HMC482ST89 / HMC482ST89E is an ideal RF/IF gain block & LO or PA driver for:

- Cellular / PCS / 3G
- Fixed Wireless, WLAN & WiMAX
- CATV, Cable Modem & DBS
- Microwave Radio & Test Equipment

Functional Diagram



Features

- P1dB Output Power: +22 dBm
- Gain: 20 dB
- Output IP3: +36 dBm
- Cascadable 50 Ohm I/Os
- Single Supply: +6V to +12V
- Industry Standard SOT89 Package
- Included in the HMC-DK001 Designer's Kit

General Description


The HMC482ST89 & HMC482ST89E are SiGe Heterojunction Bipolar Transistor (HBT) Gain Block MMIC SMT amplifiers covering DC to 5 GHz. Packaged in an industry standard SOT89, the amplifier can be used as a cascadable 50 Ohm RF/IF gain stage as well as a LO or PA driver with up to +24 dBm output power. The Darlington feedback pair results in reduced sensitivity to normal process variations and excellent gain stability over temperature while requiring a minimal number of external bias components.

Electrical Specifications, $V_s = 8.0\text{ V}$, $R_{bias} = 27\text{ Ohm}$, $T_A = +25^\circ\text{ C}$

Parameter	Min.	Typ.	Max.	Units
Gain	DC - 1.0 GHz	17	19	dB
	1.0 - 2.0 GHz	15	17	dB
	2.0 - 3.0 GHz	12.5	14.5	dB
	3.0 - 4.0 GHz	10	12	dB
	4.0 - 5.0 GHz	8	10	dB
Gain Variation Over Temperature	DC - 5.0 GHz	0.008	0.016	dB/°C
Input Return Loss	DC - 1.0 GHz	15		dB
	1.0 - 5.0 GHz	18		dB
Output Return Loss	DC - 1.0 GHz	20		dB
	1.0 - 3.0 GHz	14		dB
	3.0 - 4.0 GHz	12		dB
	4.0 - 5.0 GHz	8		dB
Reverse Isolation	DC - 5.0 GHz	16		dB
Output Power for 1 dB Compression (P1dB)	0.5 - 1.0 GHz	19.5	22.5	dBm
	1.0 - 2.0 GHz	17	20	dBm
	2.0 - 3.0 GHz	14.5	17.5	dBm
	3.0 - 4.0 GHz	12.5	15.5	dBm
	4.0 - 5.0 GHz	10.5	13.5	dBm
Output Third Order Intercept (IP3) (Pout = 0 dBm per tone, 1 MHz spacing)	0.5 - 1.0 GHz	36		dBm
	1.0 - 2.0 GHz	35		dBm
	2.0 - 3.0 GHz	32		dBm
	3.0 - 4.0 GHz	30		dBm
	4.0 - 5.0 GHz	28		dBm
Noise Figure	DC - 2.0 GHz	4		dB
	2.0 - 4.0 GHz	5		dB
	4.0 - 5.0 GHz	5.5		dB
Supply Current (Icq)		110		mA

Note: Data taken with broadband bias tee on device output.

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:




HMC482ST89 / 482ST89E

SiGe HBT GAIN BLOCK MMIC AMPLIFIER, DC - 5.0 GHz


5

AMPLIFIERS - SMT


Broadband Gain & Return Loss

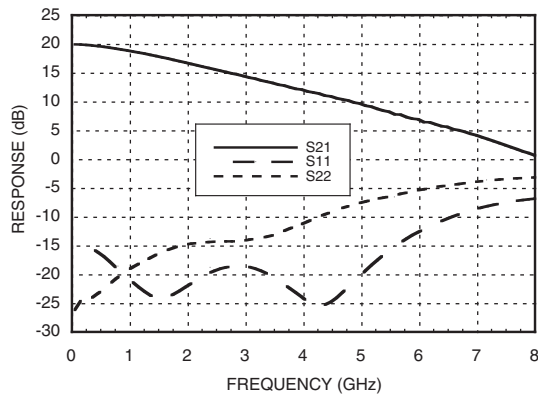


Gain vs. Temperature

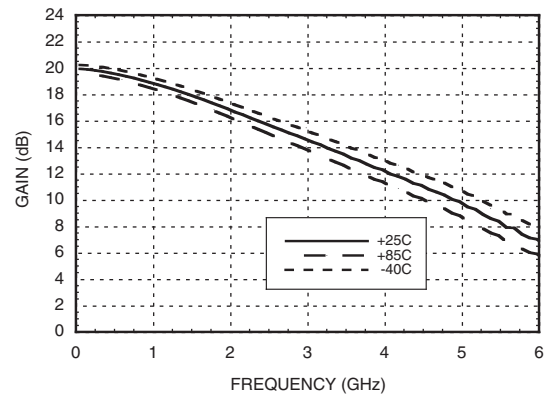


Input Return Loss vs. Temperature

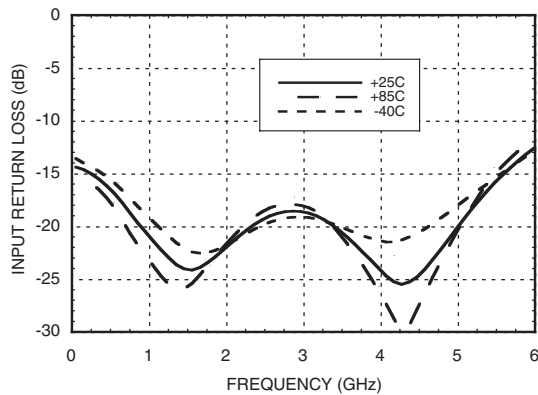


Output Return Loss vs. Temperature

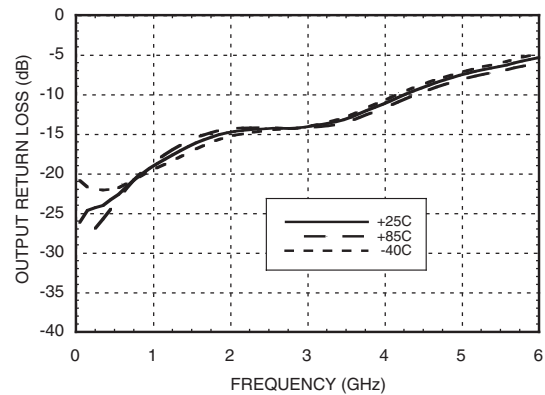

Reverse Isolation vs. Temperature

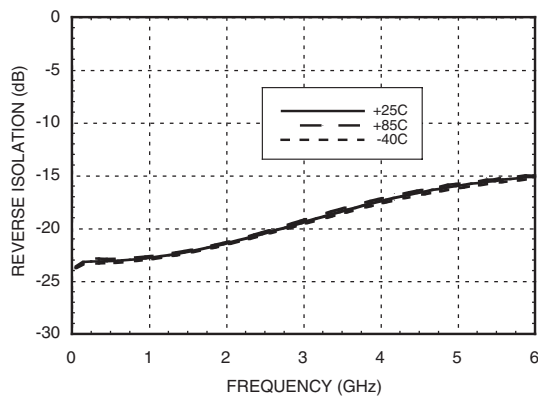

Noise Figure vs. Temperature

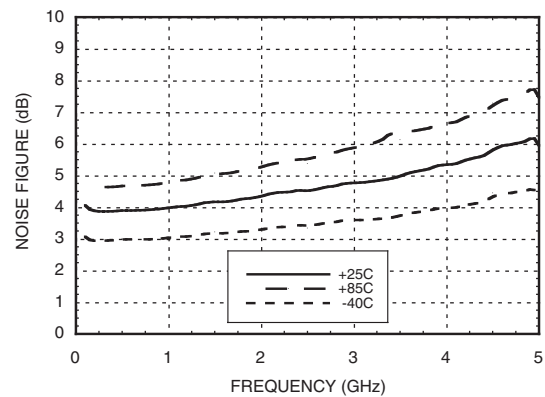








MICROWAVE CORPORATION

v02.0106



HMC482ST89 / 482ST89E

SiGe HBT GAIN BLOCK
MMIC AMPLIFIER, DC - 5.0 GHz

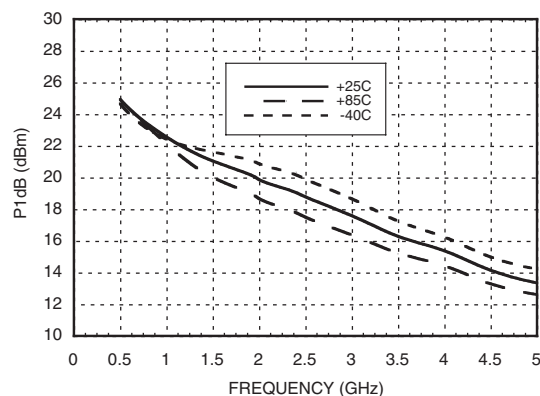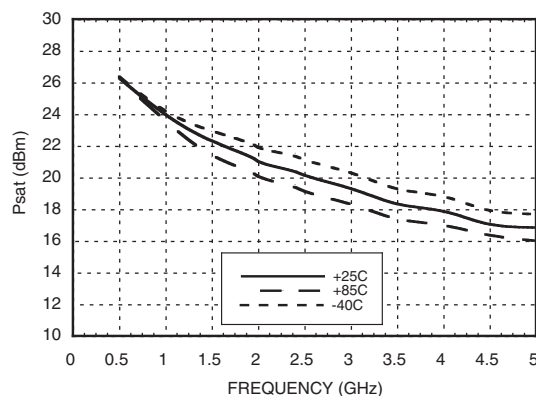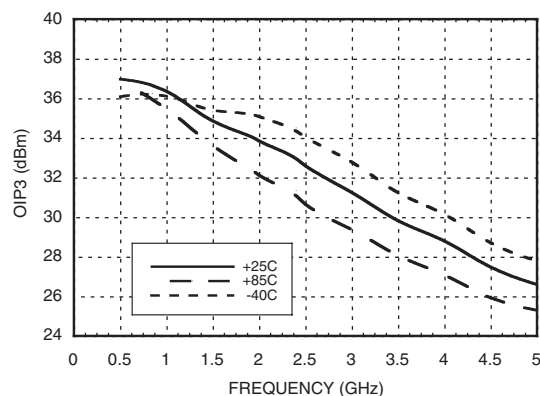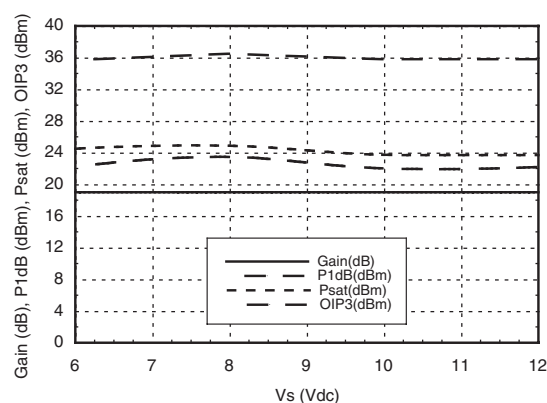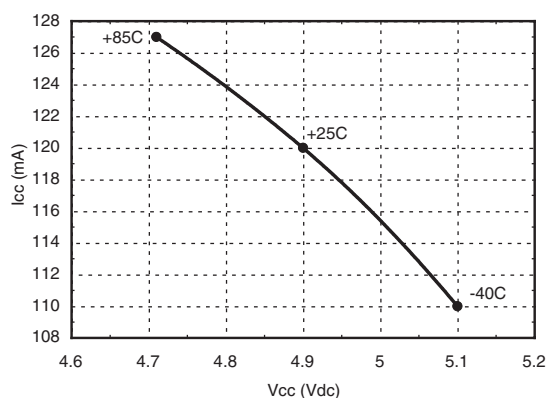P1dB vs. Temperature**Psat vs. Temperature****Output IP3 vs. Temperature****Gain, Power & OIP3 vs. Supply Voltage for Constant $I_{CC}=110\text{ mA}$ @ 850 MHz****Vcc vs. I_{CC} Over Temperature for Fixed $V_S=8\text{V}$, $R_{BIAS}=27\text{ Ohms}$** 

HMC482ST89 / 482ST89E

**SiGe HBT GAIN BLOCK
MMIC AMPLIFIER, DC - 5.0 GHz**


Absolute Maximum Ratings

Collector Bias Voltage (Vcc)	+6.0 Vdc
RF Input Power (RFIn)(Vcc = +5 Vdc)	+14 dBm
Junction Temperature	150 °C
Continuous Pdis (T = 85 °C) (derate 14.5 mW/°C above 85 °C)	0.94 W
Thermal Resistance (junction to lead)	69 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

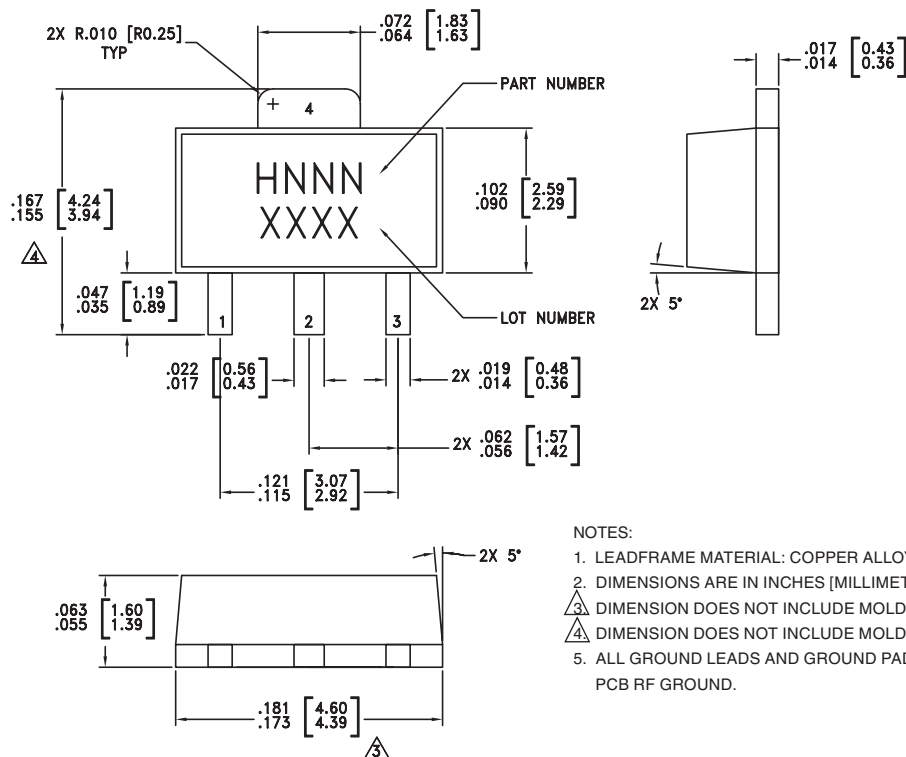

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC482ST89	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	H482 XXXX
HMC482ST89E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	<u>H482</u> XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX



MICROWAVE CORPORATION

v02.0106




HMC482ST89 / 482ST89E

SiGe HBT GAIN BLOCK
MMIC AMPLIFIER, DC - 5.0 GHz

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	RFIN	This pin is DC coupled. An off chip DC blocking capacitor is required.	
3	RFOUT	RF output and DC Bias (Vcc) for the output stage.	
2, 4	GND	These pins and package bottom must be connected to RF/DC ground.	

Application Circuit

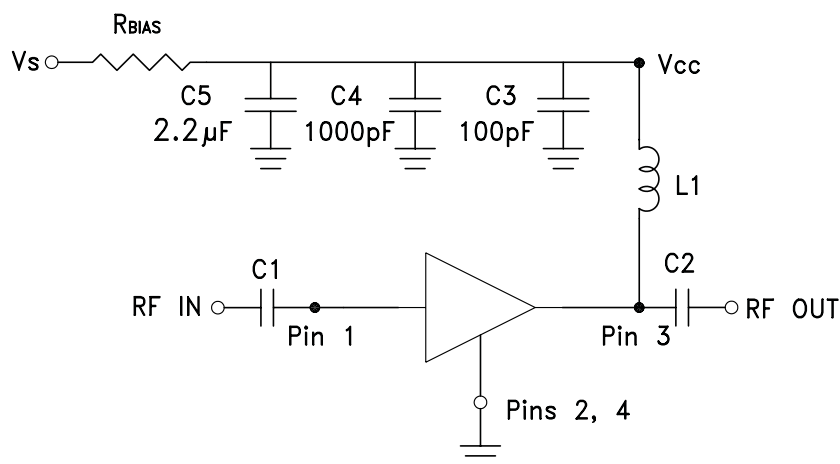

Recommended Bias Resistor Values for
 $I_{cc} = 110 \text{ mA}$, $R_{bias} = (V_s - V_{cc}) / I_{cc}$

Supply Voltage (Vs)	6V	8V	10V	12V
RBIAS VALUE	9.1 Ω	27 Ω	47 Ω	62 Ω
RBIAS POWER RATING	1/4 W	1/2 W	1 W	1.5 W


Note:

1. External blocking capacitors are required on RFIN and RFOUT.
2. RBIAS provides DC bias stability over temperature.

Recommended Component Values for Key Application Frequencies

Component	Frequency (MHz)						
	50	900	1900	2200	2400	3500	5000
L1	270 nH	56 nH	18 nH	18 nH	15 nH	8.2 nH	6.8 nH
C1, C2	0.01 μF	100 pF	100 pF	100 pF	100 pF	100 pF	100 pF

Evaluation PCB

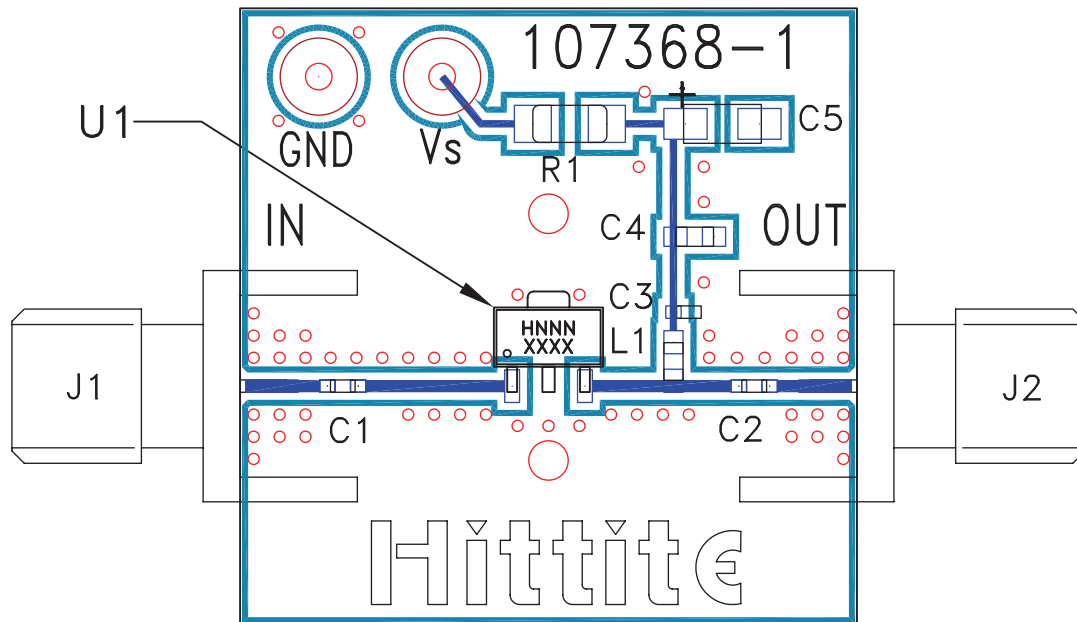

List of Materials for Evaluation PCB 108324 [1]

Item	Description
J1 - J2	PCB Mount SMA Connector
J3 - J4	DC Pin
C1, C2	Capacitor, 0402 Pkg.
C3	100 pF Capacitor, 0402 Pkg.
C4	1000 pF Capacitor, 0603 Pkg.
C5	2.2 μ F Capacitor, Tantalum
R1	Resistor, 1210 Pkg.
L1	Inductor, 0603 Pkg.
U1	HMC482ST89 / HMC482ST89E
PCB [2]	107368 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and package bottom should be connected directly to the ground plane similar to that shown. A sufficient number of VIA holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.