



Certificate Number: Q10561

Certificate Number: E17276

HSS101

FEATURES :

- Very Low I_R
- Low V_F and high efficiency.
- Pb / RoHS Free


MECHANICAL DATA :

Case: DO-34 Glass Case

Weight: approx. 0.11g

SCHOTTKY BARRIER DIODE

DO - 34 Glass

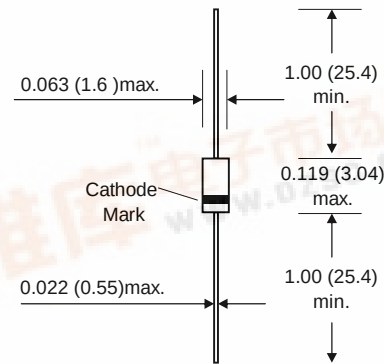

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics (Rating at 25 °C ambient temperature unless otherwise specified.)


Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Average Rectified Current	I_o	35	mA
Power Dissipation	P_D	150	mW
Junction Temperature	T_J	100	°C
Storage temperature range	T_{stg}	-65 to + 100	°C

Electrical Characteristics (Ta = 25°C unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 10\text{ V}$	-	-	10	nA
Reverse Voltage	V_R	$I_R = 10\text{ }\mu\text{A}$	30	-	-	V
Forward Voltage	V_F	$I_F = 10\text{ mA}$	-	-	0.7	V
Diode Capacitance	C_d	$V_R = 0\text{ V}, f = 1\text{ MHz}$	-	-	1.5	pF
Diode Capacitance Deviation	ΔC_d	$V_R = 0\text{ V}, f = 1\text{ MHz}$	-	-	0.1	pF
Forward Voltage Deviation	ΔV_F	$I_F = 10\text{ mA}$	-	-	10	mV

RATING AND CHARACTERISTIC CURVES (HSS101)

Forward Current VS. Forward Voltage

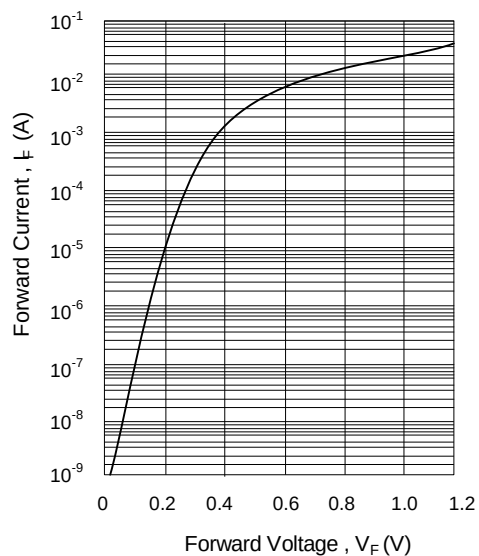

Reverse Current VS. Reverse Voltage

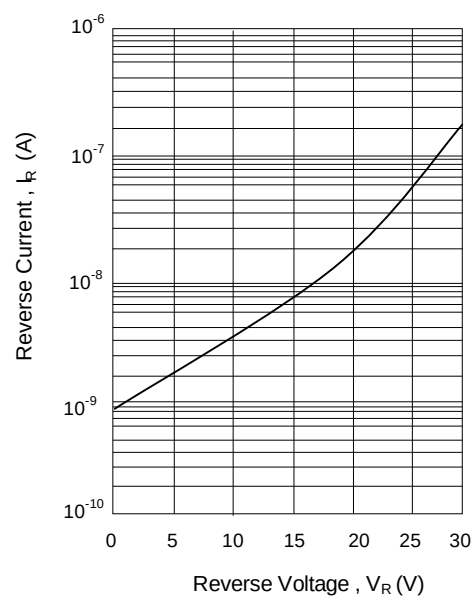

Diode capacitance VS. Reverse Voltage

