



# HI-SINCERITY MICROELECTRONICS CORP.

Spec. No. : MOS200605  
 Issued Date : 2006.02.01  
 Revised Date : 2006.02.07  
 Page No. : 1/5

## H2N7002SN

N-Channel MOSFET (60V, 0.2A)

### Description

N-channel enhancement-mode MOS transistor.

### Absolute Maximum Ratings


Drain-Source Voltage	60 V
Drain-Gate Voltage ( $R_{GS}=1M\Omega$ )	60 V
Gate-Source Voltage	$\pm 20$ V
Continuous Drain Current ( $T_A=25^\circ C$ ) <sup>(1)</sup>	200 mA
Continuous Drain Current ( $T_A=100^\circ C$ ) <sup>(1)</sup>	115 mA
Pulsed Drain Current ( $T_A=25^\circ C$ ) <sup>(2)</sup>	800 mA
Total Power Dissipation ( $T_C=25^\circ C$ )	200 mW
Derate above 25°C	0.16 mW / °C
Storage Temperature	-55 to 150 °C
Operating Junction Temperature	-55 to 150 °C
Lead Temperature, for 10 second Soldering	260 °C

### Thermal Characteristics

Thermal Resistance, Junction-to-Ambient..... 625 °C / W

### Electrical Characteristics ( $T_A=25^\circ C$ )









Parameter	Symbol	Test Conditions	Min	Typ.	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0, I_D=10\mu A$	60	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=2.5V, I_D=0.25mA$	1	-	2.5	V
Gate Source Leakage Current, Forward	$I_{GSS/F}$	$V_{GS}=+20V, V_{DS}=0$	-	-	100	nA
Gate Source leakage Current, Reverse	$I_{GSS/R}$	$V_{GS}=-20V, V_{DS}=0$	-	-	-100	nA
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=60V, V_{GS}=0$	-	-	1	$\mu A$
On-State Drain Current	$I_{D(ON)}$	$V_{DS}>2V_{DS(ON)}, V_{GS}=10V$	500	-	-	mA
Static Drain-Source On-State Voltage	$V_{DS(ON)}$	$I_D=50mA, V_{GS}=5V$	-	-	0.375	V
		$I_D=500mA, V_{GS}=10V$	-	-	3.75	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=4.5V, I_D=75mA$	-	3.3	5.3	$\Omega$
		$V_{GS}=5V, I_D=50mA$	-	2.8	5	$\Omega$
		$V_{GS}=10V, I_D=500mA$	-	2.3	5	$\Omega$
Forward Transconductance	$G_{FS}$	$V_{DS}>2V_{DS(ON)}, I_D=200mA$	80	-	-	mS
Turn-on Delay Time	$t_{d(on)}$	$(V_{DD}=50V, R_D=250\Omega, V_{GS}=10V, R_G=50\Omega)$	-	20	-	nS
Turn-off Delay Time	$t_{d(off)}$		-	40	-	nS
Input Capacitance	$C_{iss}$	$V_{DS}=25V, V_{GS}=0, f=1MHz$	-	-	50	pF
Output Capacitance	$C_{oss}$		-	-	25	pF
Reverse Transfer Capacitance	$C_{rss}$		-	-	5	pF

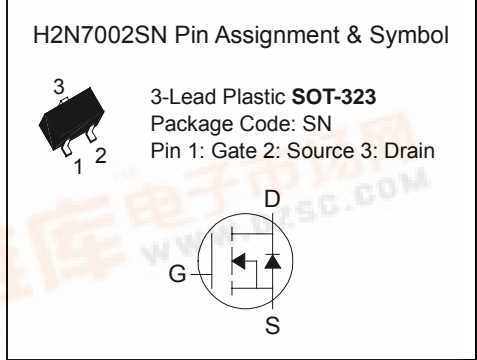

(1) The Power Dissipation of the package may result in a continuous drain current.  
 (2) Pulse Width  $\leq 300\mu s$ , Duty cycle  $\geq 2\%$ .






### Characteristics Curve

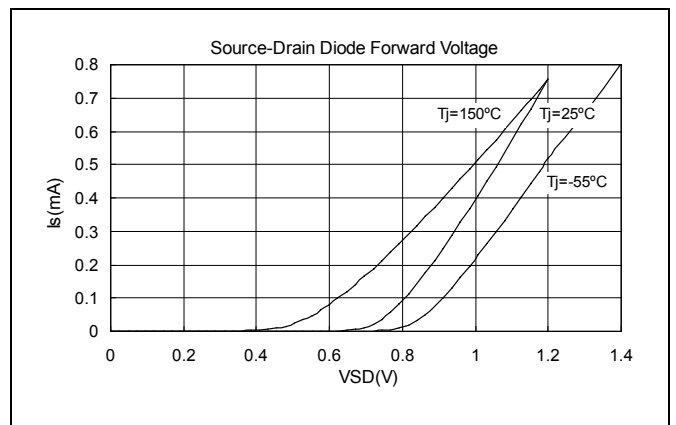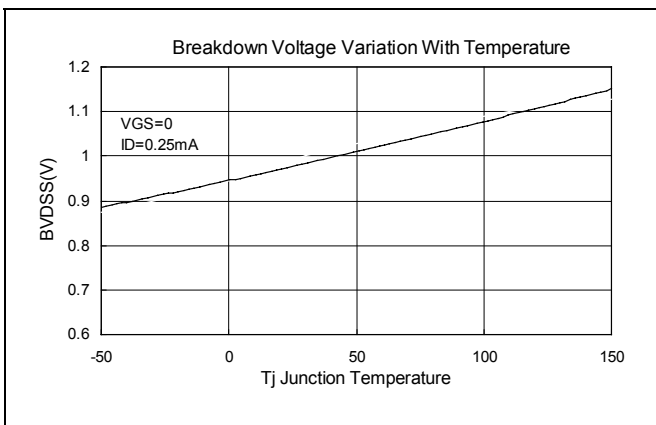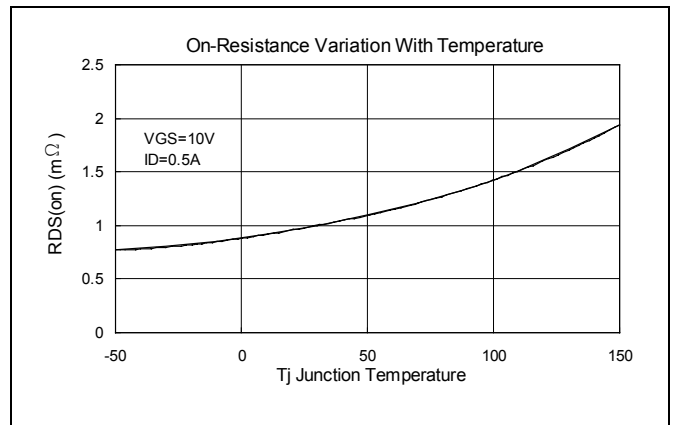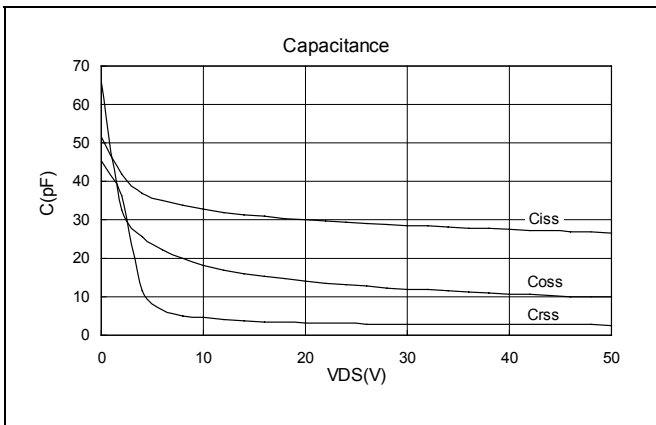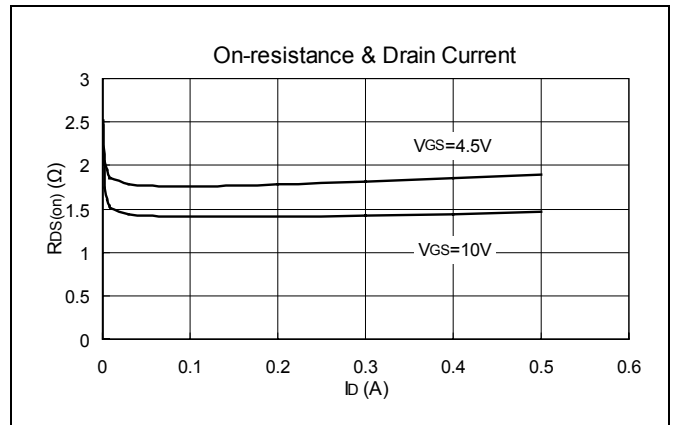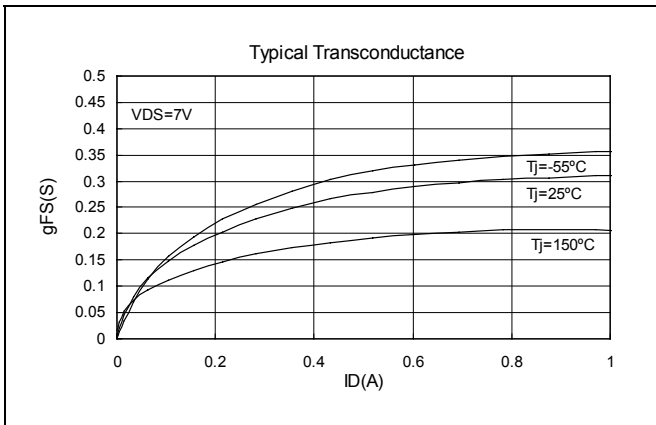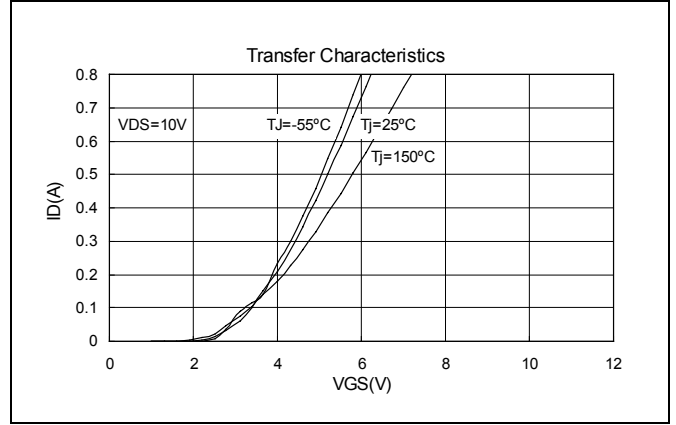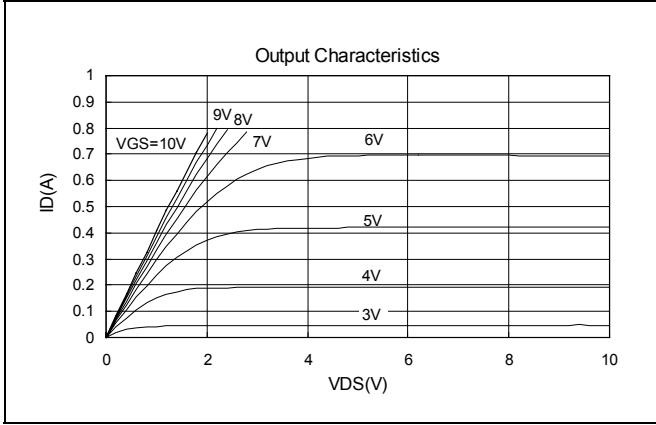



# HI-SINCERITY MICROELECTRONICS CORP.

Spec. No. : MOS200605  
Issued Date : 2006.02.01  
Revised Date : 2006.02.07  
Page No. : 3/5

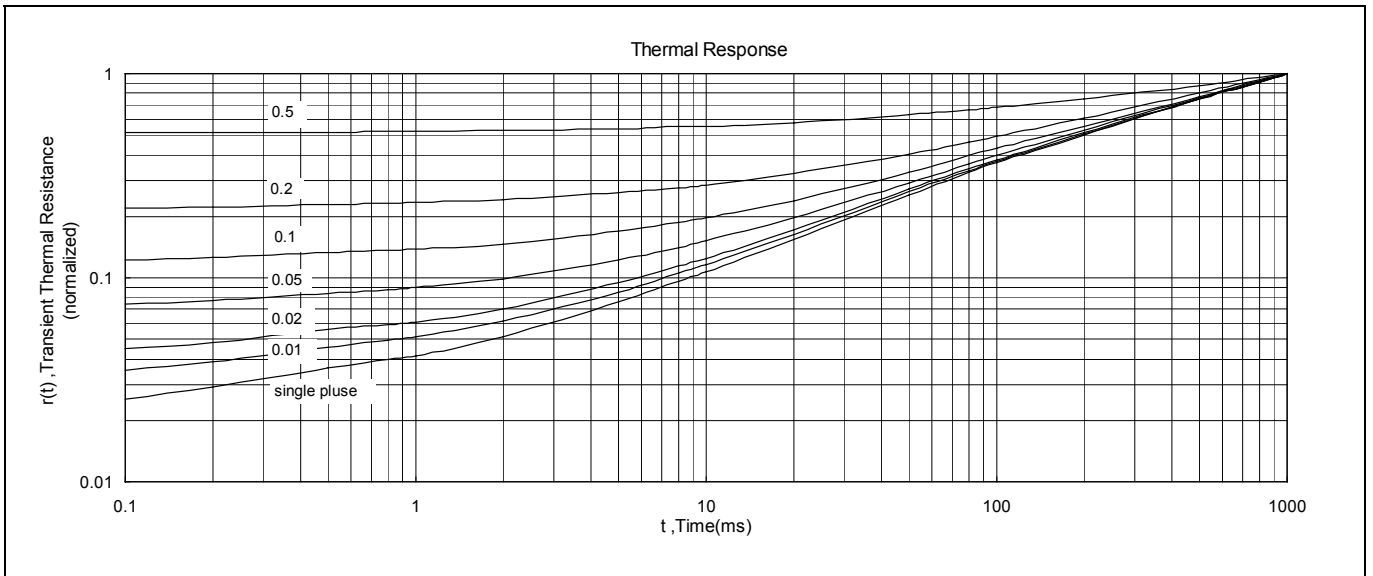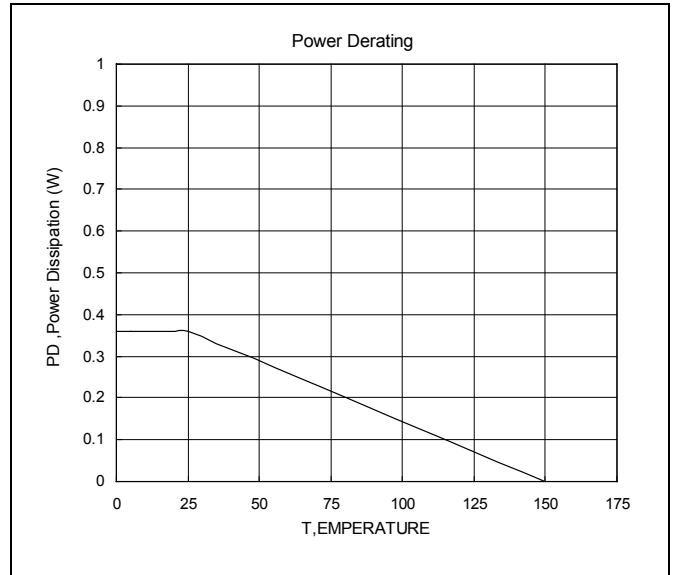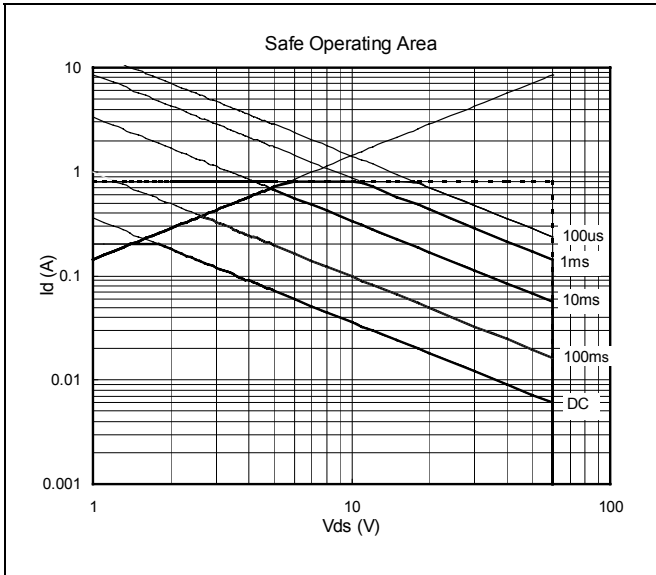



### SOT-323(SC-70) Dimension

0 1 2 mm  
scale

3-Lead SOT-323 Plastic  
 Surface Mounted Package  
 HSMC Package Code: SN

Marking:

Pb Free Mark  
 Pb-Free: "●" (Note)  
 Normal: None

Note: Pb-free product can distinguish by the green label or the extra description on the right side of the label.

Pin Style: 1.Gate 2.Source 3.Drain

Material:

- Lead solder plating: Sn60/Pb40 (Normal), Sn/3.0Ag/0.5Cu or Pure-Tin (Pb-free)
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

DIM	Min.	Max.
A	0.80	1.10
A1	0.00	0.10
bp	0.30	0.40
C	0.10	0.25
D	1.80	2.20
E	1.15	1.35
e	1.3	-
e1	0.65	-
He	2.00	2.25
Lp	0.15	0.45
Q	0.13	0.23
v	0.2	-
w	0.2	-
θ	10°	0°

\*: Typical, Unit: mm

#### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

#### Head Office And Factory:


- **Head Office** (Hi-Sincerity Microelectronics Corp.): 10F., No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.  
 Tel: 886-2-2521-2056 Fax: 886-2-2563-2712
- **Factory 1:** No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C  
 Tel: 886-3-598-3621~5 Fax: 886-3-598-2931



## Soldering Methods for HSMC's Products

1. Storage environment: Temperature=10°C~35°C Humidity=65%±15%
2. Reflow soldering of surface-mount devices

Figure 1: Temperature profile

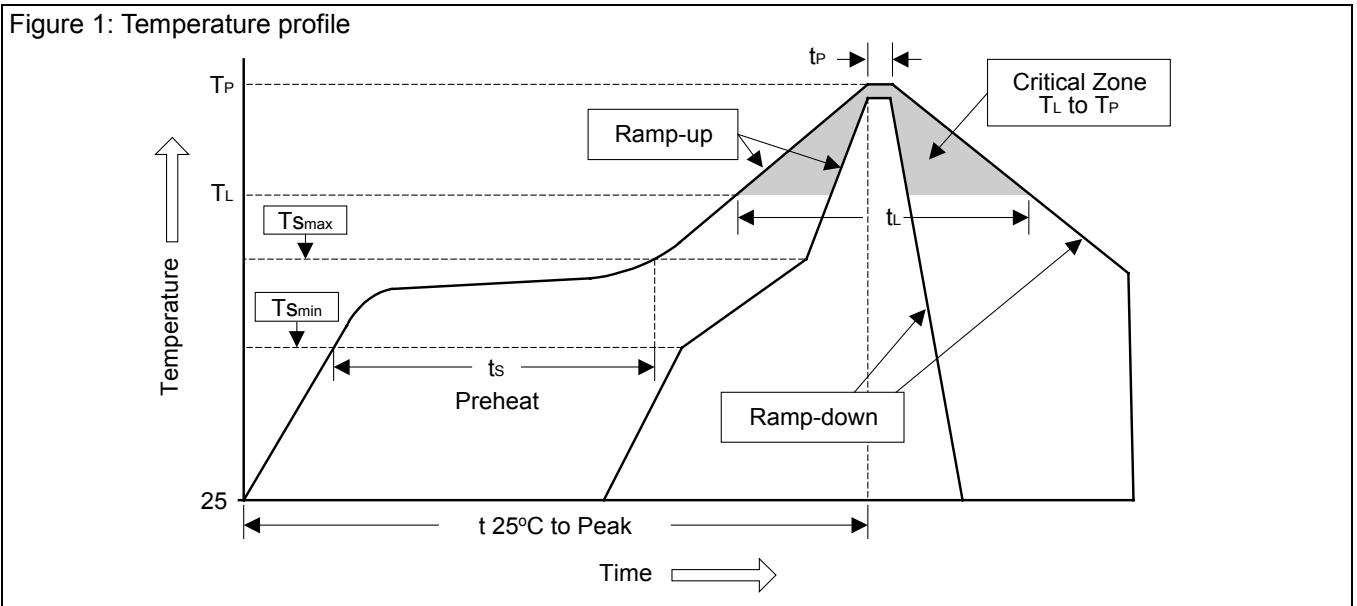

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	<3°C/sec	<3°C/sec
Preheat		
- Temperature Min ( $T_{Smin}$ )	100°C	150°C
- Temperature Max ( $T_{Smax}$ )	150°C	200°C
- Time (min to max) ( $t_s$ )	60~120 sec	60~180 sec
$T_{Smax}$ to $T_L$		
- Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above:		
- Temperature ( $T_L$ )	183°C	217°C
- Time ( $t_L$ )	60~150 sec	60~150 sec
Peak Temperature ( $T_P$ )	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<8 minutes

3. Flow (wave) soldering (solder dipping)

Products	Peak temperature	Dipping time
Pb devices.	245°C ±5°C	10sec ±1sec
Pb-Free devices.	260°C ±5°C	10sec ±1sec