



Integrated
Circuit
Systems, Inc.

ICS162835

Advance Information

18-Bit 3.3V Registered Buffer

Recommended Applications:

- PC133 Registered Memory Module
- PC motherboards
- Servers and workstations
- Provides complete PC133 DIMM solution with ICS2509, ICS2510 PLL.

Product Features:

- Meets JESD 82-2 specification
- Internal series resistors to reduce switching noise
- ±12 mA device capability
- Low voltage operation
- $V_{DD} = 3.3 \pm 0.3V$
- 0.50 mm pitch, 56-Pin TSSOP package


Function Table¹

OE#	Inputs			Outputs	
	LE	CLK	A _x	Y _x	
H	X	X	X	Z	
L	H	X	L	L	
L	H	X	H	H	
L	L	↑	L	L	
L	L	↑	H	H	
L	L	H	X	Y ₀ ⁽²⁾	
L	L	L	X	Y ₀ ⁽³⁾	


Notes:

1. H = HIGH Voltage Level
L = LOW Voltage Level
X = Don't Care
Z = High-Impedance
↑ = LOW-to-HIGH Transition
2. Output level before the indicated steady-state input conditions were established, provided that CLK is HIGH before LE went LOW.
3. Output level before the indicated steady-state input conditions were established.

Block Diagram

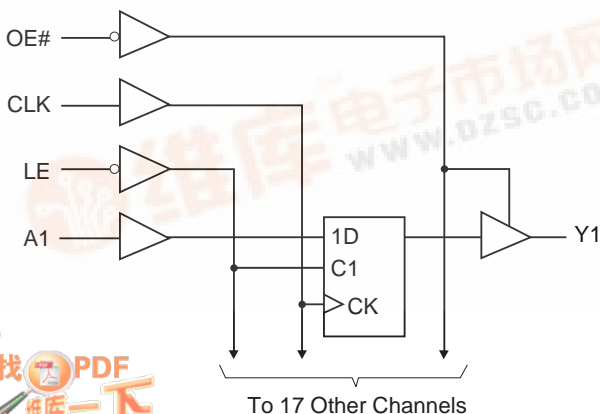

Pin Configurations

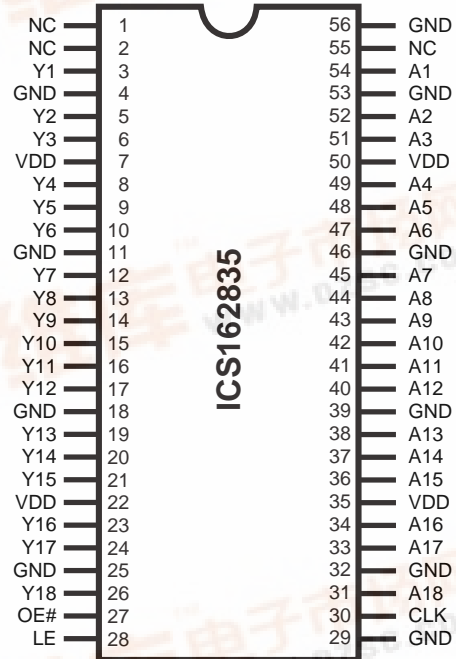

56-Pin TSSOP

6.10 mm. Body, 0.50 mm. pitch

Pin Description

Pin Names	Description
OE#	Output Enable Input (Active Low)
CLK	Clock Input
LE	Latch Enable Input
A _x	Data Input
Y _x	Data Outputs
V _{DD}	Supply Voltage
GND	Ground

ICS162835

Advance Information



General Description

The ICS162835 low voltage 18-bit register combines D-type latches and D-type flip-flops to allow data flow in transparent, latched and clocked modes. Data flow is controlled by output-enable (OE#), latch enable (LE), and clock (CLK) inputs. The device operates in transparent mode when LE is held high. The device operates in clocked mode when LE is low and CLK is toggled. Data transfers from the inputs (A[18:1]) to outputs (Y[18:1]) on a positive edge transition of the clock. When OE# is low, the output state is enabled. When OE# is high, the output port is in a high impedance state.

The 18-bit registered buffer is designed to operate with a 3.0V to 4.6V supply voltage.

All inputs support operation with standard LVTTTL interface levels. This includes data inputs, clock inputs and control inputs. Device outputs meet the requirements of the PC133 Registered DIMM specification. The device functions as defined supports latched, registered and flow through modes of operations. The PC133 Specification requires only registered mode.

Package is a 56 thin shrink small-outline package as defined by JEDEC Publication, JEP95, MO-153.



Absolute Maximum Ratings

Storage Temperature.....	-65°C to + 150°C
Supply Voltage (V _{DD})	-0.5 to 4.6V
Input Voltage (V _I)	-0.5 to 4.6V
Output Voltage (V _O)	-0.5 to V _{DDQ} + 0.5
Input Clamp Current (I _{IK})	50 mA
Output Clamp Current (I _{OK})	±50 mA
Continuous Output Current (I _O)	±50 mA
V _{DD} , V _{DDQ} or GND Current/Pin	±100 mA
Package Thermal Impedance' O _{JA}	64°C/W

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Recommended Operating Conditions

PARAMETER	DESCRIPTION	MIN	TYP	MAX
V _{DD}	Supply Voltage	3.0	3.3	3.6
V _{IN}	Voltage Applied to input pins	-0.3		3.6
V _{OUT}	Voltage Applied to output or I/O pins	Outputs enabled	0	V _{DD}
		Outputs high-Z	0	V _{DD}
T _A	Operating free-air temperature	0		70

Switching Characteristics

Symbol	Parameter	V _{CC} = 3.3V ± 0.15V		UNITS
		MIN	MAX	
t _{PLH} , t _{PHL}	Propagation Delay CLK to Y _X	1.8	3.5	ns
t _{SK(O)}	Output Skew*	-	500	ps
f _{CLOCK}		150	-	MHz

* Skew between any two outputs of the same package and switching in the same direction

ICS162835

Advance Information



Electrical Characteristics - DC

$T_A = 0 - 70^\circ \text{C}$; $V_{DD} = 3.3 \pm 0.3\text{V}$, $V_{DDQ} = 3.3 \pm 0.3\text{V}$; (unless otherwise stated)

SYMBOL	PARAMETERS	CONDITIONS	V_{DD} (V)	MIN	TYP	MAX	UNITS
V_{IH}	HIGH-level input voltage		3.0 - 3.6	2.0			V
V_{IL}	LOW-level input voltage		3.0 - 3.6			0.8	V
V_{OH}	HIGH-level output voltage	$I_{OH} = -12 \text{ mA}$, $V_{IH} = 2.0\text{V}$	3.0	2.2			V
V_{OL}	Low-level output voltage	$I_{OL} = 12 \text{ mA}$, $V_{IL} = 0.8\text{V}$	3.0			0.8	
I_I	Input leakage current	$V_I = V_{DD}$ or GND	3.0 - 3.6			± 10	μA
I_{OZ}	Off-state leakage current	$V_O = V_{DD}$ or GND#, $OE = V_{DD}$				± 20	μA
I_{DD}	Quiescent Supply Current	$V_I = V_{DD}$ or GND, $I_O = 0$				± 40	μA

* Parameters are characterized over recommended operating conditions.

Critical Register Specifications*


SYMBOL	PARAMETERS	CONDITION	V_{DD} (V)	MIN	TYP	MAX	UNITS
t_{PD}^{**}	Propagation Delay (CK to Y)	$R_L = 500 \Omega$, $C_L = 50 \text{ pF}$	3.0 - 3.6	1.4		3.5	ns
t_{PD}^{**}	Propagation Delay (CK to Y)	$R_L = 500 \Omega$, $C_L = 30 \text{ pF}$	3.0 - 3.6	0.7		2.5	ns
t_S	Setup time (A before CK)		3.0 - 3.6	1.0			ns
t_H	Hold time (A after CK)		3.0 - 3.6	0.6			ns
C_I	Clock input capacitance		3.0 - 3.6	3.3	4.0	6.0	pF

* Parameters are characterized over recommended operating conditions.

** The t_{PD} value in this table would equate to the 'Time-to-V_m' delay described in the post register timing specifications of the PC133 registered DIMM Specification. The first value applies to DIMMs with nine SDRAM loads per register output, and the second to DIMMs with eighteen SDRAM loads per register output. These values should serve as only an initial starting point,



Test Circuit and Switching Waveforms

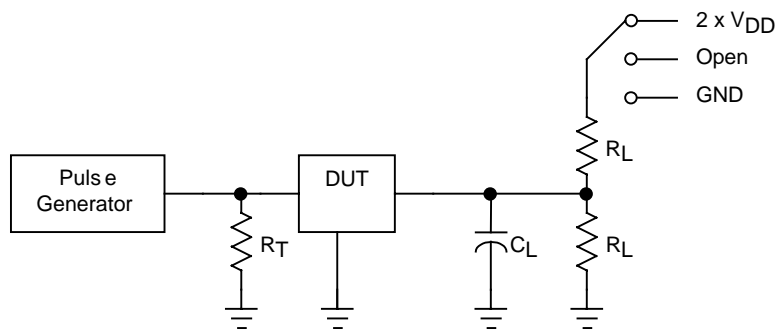

Test Circuit

Test circuit component values:

R_L = Load Resistor = 500 Ω

C_L = Load Capacitance and includes probe and jig capacitance

R_T = Termination resistance should be equal to Z_{OUT} of Pulse Generator

V_{IN} = 0 to V_{DD}

$t_r = t_f$ 2.0 ns (10% to 90%) unless otherwise specified.


Parameter Tested	Switch Position
t_{PLH}	Open
t_{PHL}	Open
t_{PZH}	GND
t_{PZL}	$2 \times V_{DD}$
t_{PHZ}	GND
t_{PLZ}	$2 \times V_{DD}$

ICS162835


Advance Information




PROPAGATION DELAY MEASUREMENT

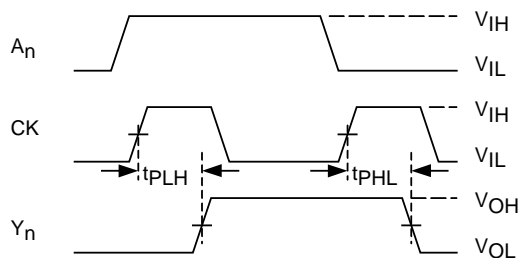


SETUP TIME MEASUREMENTS

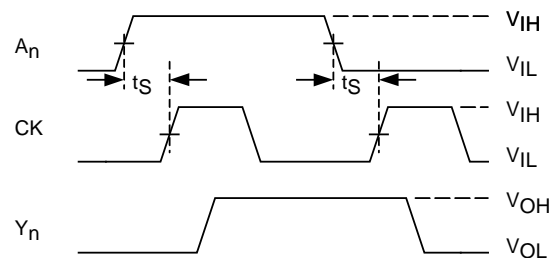

HOLD TIME MEASUREMENTS

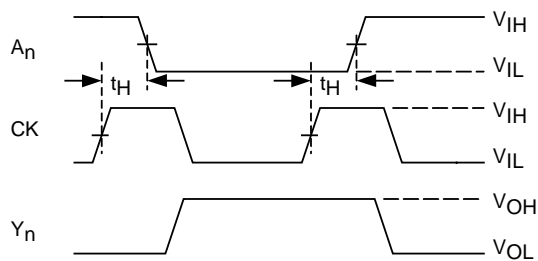


ENABLE AND DISABLE TIMES

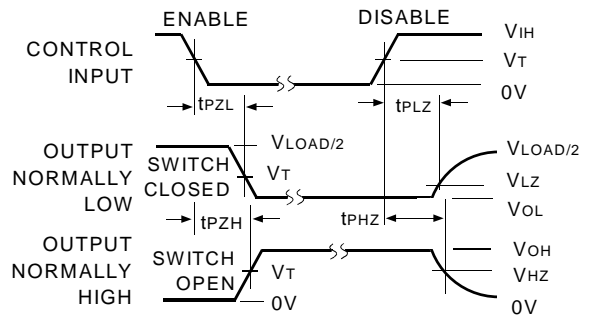


NOTE:
1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

OUTPUT SKEW - $t_{SK(x)}$

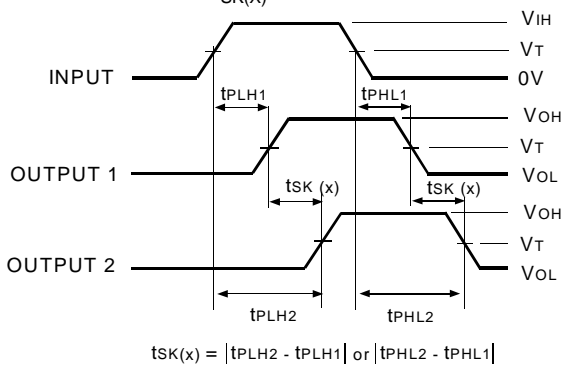

NOTES:
1. For $t_{SK(o)}$ OUTPUT1 and OUTPUT2 are any two outputs.
2. For $t_{SK(b)}$ OUTPUT1 and OUTPUT2 are in the same bank.


PULSE WIDTH

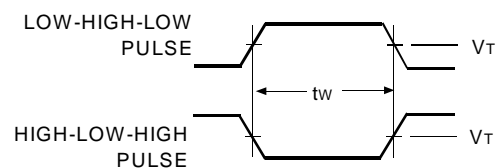



ICS162835

Advance Information

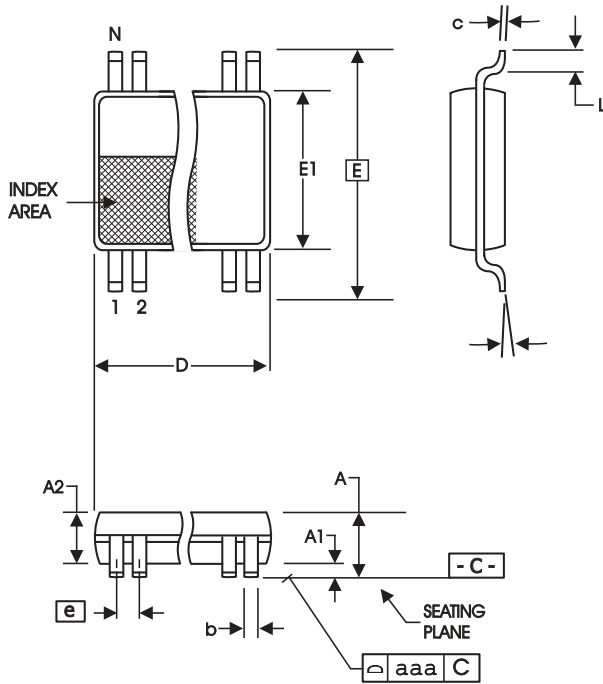

6.10 mm. Body, 0.50 mm. pitch TSSOP
(240 mil) (0.020 mil)

SYMBOL	In Millimeters		In Inches	
	COMMON DIMENSIONS	COMMON DIMENSIONS	COMMON DIMENSIONS	COMMON DIMENSIONS
	MIN	MAX	MIN	MAX
A	--	1.20	--	.047
A1	0.05	0.15	.002	.006
A2	0.80	1.05	.032	.041
b	0.17	0.27	.007	.011
c	0.09	0.20	.0035	.008
D	SEE VARIATIONS		SEE VARIATIONS	
E	8.10 BASIC		0.319 BASIC	
E1	6.00	6.20	.236	.244
e	0.50 BASIC		0.020 BASIC	
L	0.45	0.75	.018	.030
N	SEE VARIATIONS		SEE VARIATIONS	
α	0°	8°	0°	8°
aaa	--	0.10	--	.004

VARIATIONS

N	D mm.		D (inch)	
	MIN	MAX	MIN	MAX
56	13.90	14.10	.547	.555

Reference Doc.: JEDEC Publication 95, MO-153

10-0039

Ordering Information

ICS162835AG-T

Example:

ICS XXXX y G - PPP - T

- Prefix
- Device Type (consists of 3 or 4 digit numbers)
- Revision Designator (will not correlate with datasheet revision)
- Package Type
G=TSSOP
- Pattern Number (2 or 3 digit number for parts with ROM code patterns)
- Designation for tape and reel packaging