

ILBB-0402

Vishay Dale



Surface Mount, Multilayer Ferrite Beads



FEATURES

- High reliability
- Surface mountable
- Magnetically self shielded
- Nickel barrier plating virtually eliminates silver migration
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COMPLIANT

MECHANICAL SPECIFICATIONS

Solderability: 90 % coverage after 5 second dip in 235 °C solder following 60 second preheat at 120 °C to 150 °C and type R flux dip

Resistance To Solder Heat: 10 seconds in 260 °C solder after preheat and flux per above

Terminal Strength: 0.2 kg for 30 seconds

Beam Strength: 0.2 kg

Flex: 0.2 mm minimum mounted on a 1.6 mm thick PC board

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: - 55 °C to + 125 °C

Thermal Shock: 100 cycles, - 40 °C to + 125 °C

Biased Humidity: 85 % RH at 85 °C, 1000 hours at full rated current

STANDARD ELECTRICAL SPECIFICATIONS		
Z AT 100 MHz (± 25 %)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)
20	0.13	300
30	0.20	300
40	0.20	300
60	0.30	300
70	0.30	300
120	0.45	300
240	0.70	200
300	0.80	200
600	1.00	200

DIMENSIONS in inches [millimeters]			
A	B	C	D
0.04 ± 0.004 [1.0 ± 0.1]	0.02 ± 0.004 [0.5 ± 0.1]	0.02 ± 0.004 [0.5 ± 0.1]	0.01 ± 0.004 [0.25 ± 0.1]










DESCRIPTION				
ILBB-0402	120	± 25 %	ER	e3
MODEL	IMPEDANCE VALUE	IMPEDANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER				
I	L	B	B	
PRODUCT FAMILY				
0	4	0	2	
SIZE				
E	R			
PACKAGE CODE				
1	2	1		
IMPEDANCE VALUE				
		V		
			IMPEDANCE TOLERANCE	





TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF R, X AND Z

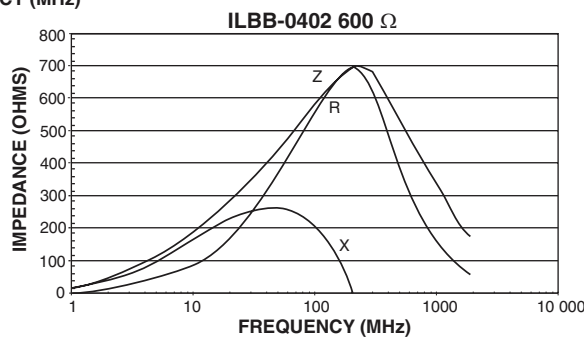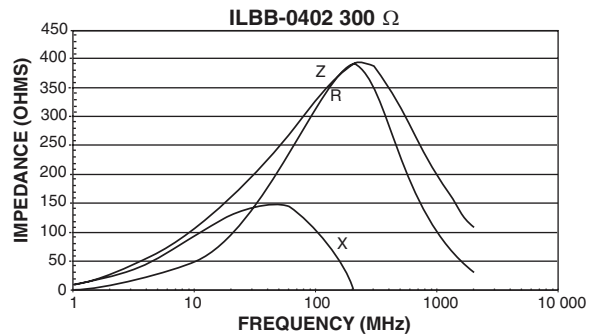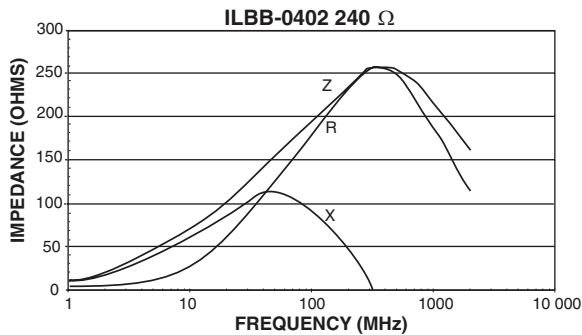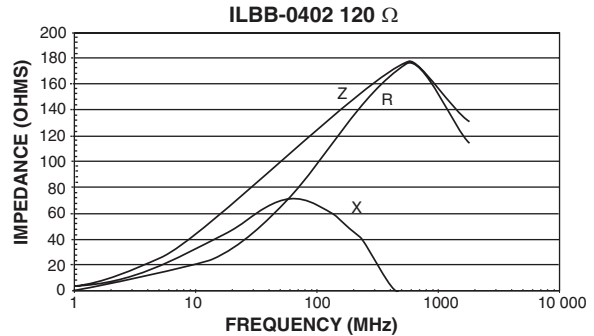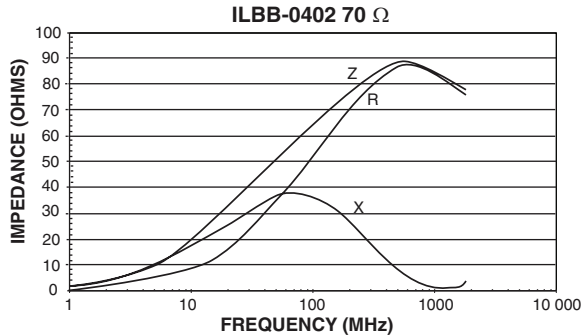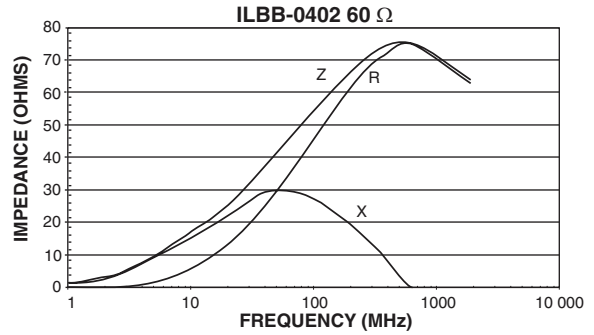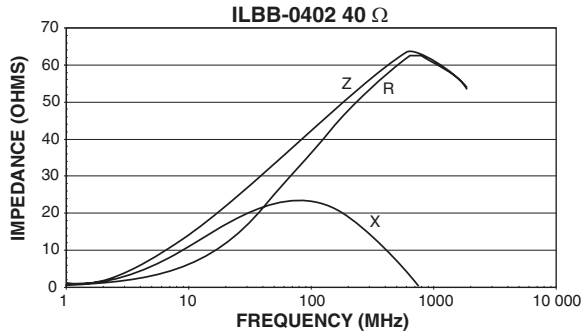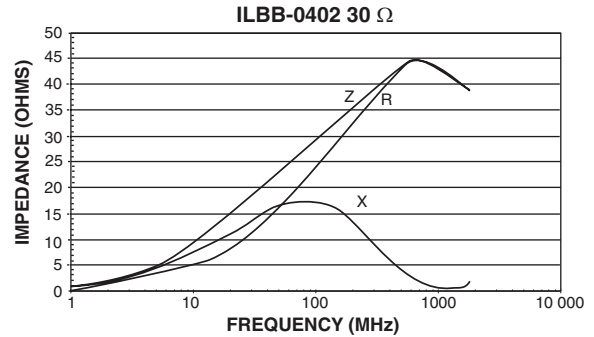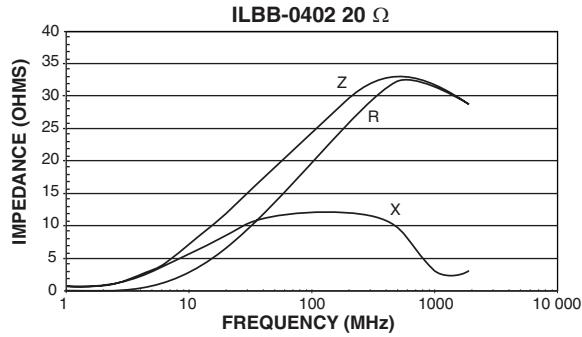



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.