




IMC-0402

Vishay Dale

High Frequency, Surface Mount, Laser Spiral, Coated Inductors

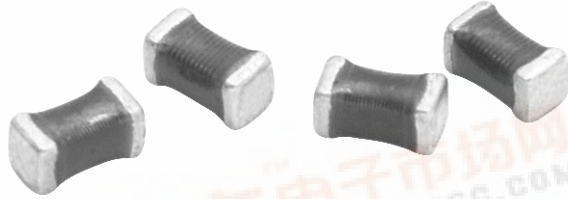

FEATURES

- Very small in size
- High self-resonant frequency values
- High Q values relative to size at higher frequencies
- Coated coil provides protection and moisture resistance
- Compatible with vapor phase and infrared reflow soldering
- Tape and reel packaging for automatic handling, 10 000/reel, EIA-481
- L and Q value not affected by mounting orientation
- 100 % lead (Pb)-free and RoHS compliant



RoHS COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance Range: 1.0 nH to 100 nH
Inductance and Tolerance: ± 0.3 nH for 1.0 - 5.6 nH
 ± 5 % for 6.8 nH to 100 nH
Operating Temperature: - 40 °C to + 100 °C
Core Material: Ceramic

TEST EQUIPMENT


- Inductance and Q measured on HP4291B
- SRF measured on HP8753E
- DCR measured on HP4338B

STANDARD ELECTRICAL SPECIFICATIONS

INDUCTANCE (nH)	TOLERANCE	TEST FREQUENCY L (MHz)	Q TYPICAL	TEST FREQUENCY Q (MHz)	SELF-RESONANT FREQUENCY MINIMUM (MHz)	DCR MAXIMUM (Ohms)	RATED DC* CURRENT (mA)
1.0	± 0.3 nH, 0.2 nH	100	21	800	6000	0.05	400
1.2	± 0.3 nH, 0.2 nH	100	21	800	6000	0.06	400
1.5	± 0.3 nH, 0.2 nH	100	21	800	6000	0.07	400
1.8	± 0.3 nH, 0.2 nH	100	21	800	6000	0.08	400
2.2	± 0.3 nH, 0.2 nH	100	21	800	6000	0.09	400
2.7	± 0.3 nH, 0.2 nH	100	21	800	5500	0.10	400
3.3	± 0.3 nH, 0.2 nH	100	21	800	5500	0.12	400
3.9	± 0.3 nH, 0.2 nH	100	20	800	5200	0.15	360
4.7	± 0.3 nH, 0.2 nH	100	20	800	4800	0.17	360
5.6	± 0.3 nH, 0.2 nH	100	20	800	4600	0.19	340
6.8	± 5 %	100	19	800	4000	0.30	320
8.2	± 5 %	100	19	800	3500	0.35	320
10	± 5 %, ± 2 %	100	19	800	2800	0.41	320
12	± 5 %, ± 2 %	100	19	800	2800	0.45	320
15	± 5 %, ± 2 %	100	19	800	2500	0.60	240
18	± 5 %, ± 2 %	100	19	800	2200	0.70	240
22	± 5 %, ± 2 %	100	19	800	2000	0.80	200
27	± 5 %, ± 2 %	100	19	800	1800	1.20	200
33	± 5 %, ± 2 %	100	18	800	1800	1.40	170
39	± 5 %, ± 2 %	100	18	800	1800	1.70	150
47	± 5 %, ± 2 %	100	17	800	1800	2.10	140
56	± 5 %, ± 2 %	100	17	800	1500	2.50	130
68	± 5 %, ± 2 %	100	15	800	1500	4.00	120
82	± 5 %, ± 2 %	100	15	800	1400	4.50	110
100	± 5 %, ± 2 %	100	14	800	1200	5.50	90

*Value obtained when current flows and temperature has risen 15 °C


DIMENSIONS in inches [millimeters]

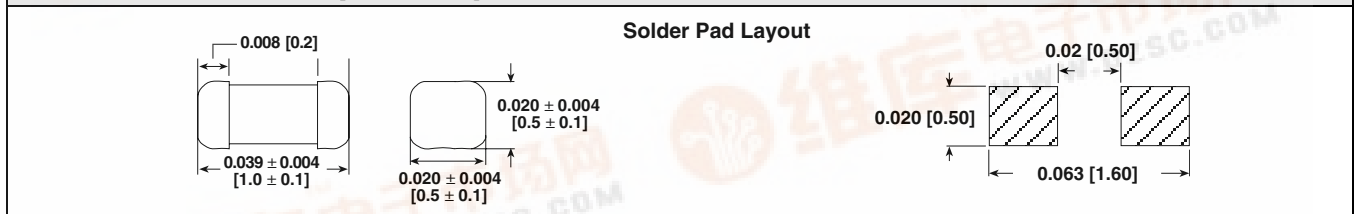

DESCRIPTION

IMC-0402	10 nH	± 5 %	ER	e4
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

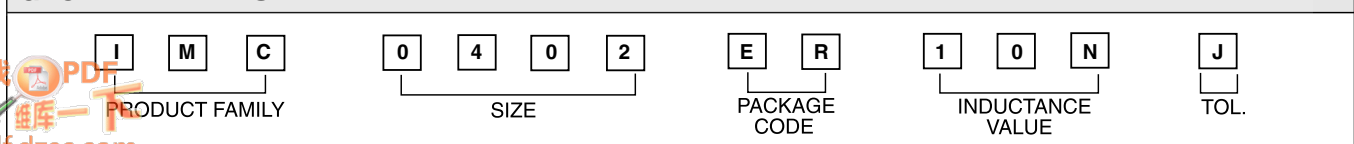



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.