

# International Rectifier


- RoHS compliant containing no lead or bromide ①
- Low Profile (<0.6 mm)
- Dual Sided Cooling Compatible ①
- Ultra Low Package Inductance
- Optimized for High Frequency Switching ①
- Ideal for CPU Core DC-DC Converters
- Optimized for Control FET applications ①
- Low Conduction and Switching Losses
- Compatible with existing Surface Mount Techniques ①

## IRF6631

DirectFET™ Power MOSFET ②

Typical values (unless otherwise specified)

$V_{DSS}$	$V_{GS}$	$R_{DS(on)}$	$R_{DS(on)}$
30V max	$\pm 20V$ max	6.0mΩ @ 10V	8.3mΩ @ 4.5V
$Q_{g\text{ tot}}$	$Q_{gd}$	$Q_{gs2}$	$Q_{rr}$
12nC	4.4nC	1.1nC	10nC
$Q_{oss}$	$V_{gs(\text{th})}$		
7.3nC	1.8V		



Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details) ①

SQ	SX	ST	MQ	MX	MT	MP		


### Description

The IRF6631 combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of a MICRO-8 and only 0.6 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6631 balances both low resistance and low charge along with ultra low package inductance to reduce both conduction and switching losses. The reduced total losses make this product ideal for high efficiency DC-DC converters that power the latest generation of processors operating at higher frequencies. The IRF6631 has been optimized for parameters that are critical in synchronous buck including  $R_{ds(on)}$  and gate charge to minimize losses in the control FET socket.

### Absolute Maximum Ratings

	Parameter	Max.	Units
$V_{DS}$	Drain-to-Source Voltage	30	V
$V_{GS}$	Gate-to-Source Voltage	$\pm 20$	
$I_D @ T_A = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	13	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	10	
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ④	57	
$I_{DM}$	Pulsed Drain Current ⑤	100	
$E_{AS}$	Single Pulse Avalanche Energy ⑥	13	mJ
$I_{AR}$	Avalanche Current ⑤	10	A

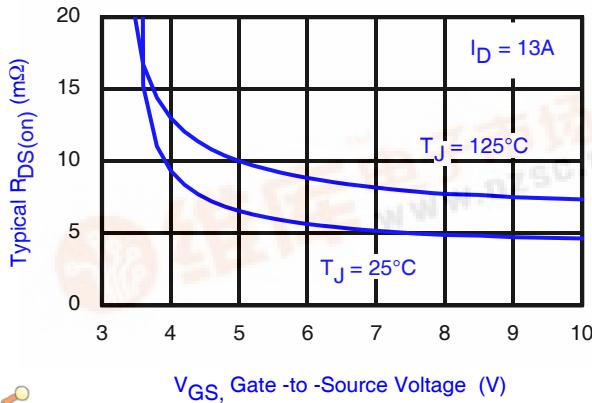

$V_{GS}$ , Gate-to-Source Voltage (V)

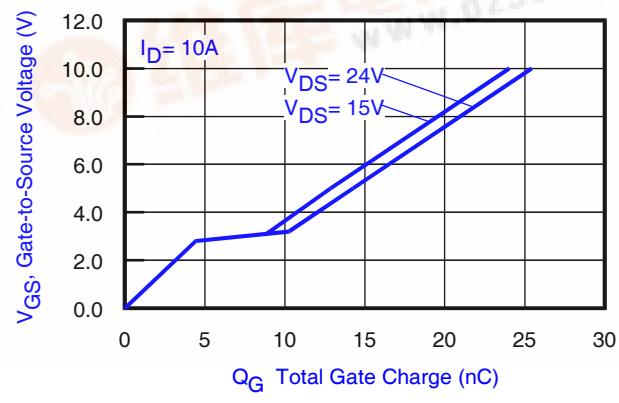


Fig 2. Typical Total Gate Charge vs Gate-to-Source Voltage

①  $T_C$  measured with thermocouple mounted to top (Drain) of part.

② Repetitive rating; pulse width limited by max. junction temperature.

③ Starting  $T_J = 25^\circ C$ ,  $L = 0.24mH$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 10A$ .


④ Surface mounted on 1 in. square Cu board, steady state.

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	23	—	$\text{mV}/^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	6.0	7.8	$\text{m}\Omega$	$V_{\text{GS}} = 10\text{V}, I_D = 13\text{A}$ ①
		—	8.3	10.8		$V_{\text{GS}} = 4.5\text{V}, I_D = 10\text{A}$ ①
$V_{\text{GS(th)}}$	Gate Threshold Voltage	1.35	1.8	2.35	V	$V_{\text{DS}} = V_{\text{GS}}, I_D = 25\mu\text{A}$
$\Delta V_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-5.2	—	$\text{mV}/^\circ\text{C}$	
$I_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	1.0	$\mu\text{A}$	$V_{\text{DS}} = 24\text{V}, V_{\text{GS}} = 0\text{V}$
		—	—	150		$V_{\text{DS}} = 24\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
$I_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{\text{GS}} = -20\text{V}$
$g_{\text{fs}}$	Forward Transconductance	32	—	—	S	$V_{\text{DS}} = 15\text{V}, I_D = 10\text{A}$
$Q_g$	Total Gate Charge	—	12	18	nC	$V_{\text{DS}} = 15\text{V}$ $V_{\text{GS}} = 4.5\text{V}$ $I_D = 10\text{A}$ See Fig. 15
$Q_{\text{gs}1}$	Pre-Vth Gate-to-Source Charge	—	3.4	—		
$Q_{\text{gs}2}$	Post-Vth Gate-to-Source Charge	—	1.1	—		
$Q_{\text{gd}}$	Gate-to-Drain Charge	—	4.4	—		
$Q_{\text{godr}}$	Gate Charge Overdrive	—	3.1	—		
$Q_{\text{sw}}$	Switch Charge ( $Q_{\text{gs}2} + Q_{\text{gd}}$ )	—	5.5	—	nC	$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}$
$Q_{\text{oss}}$	Output Charge	—	7.3	—		
$R_G$	Gate Resistance	—	1.6	3.0		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	15	—	ns	$V_{\text{DD}} = 16\text{V}, V_{\text{GS}} = 4.5\text{V}$ ① $I_D = 10\text{A}$ Clamped Inductive Load See Fig. 16 & 17
$t_r$	Rise Time	—	18	—		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	18	—		
$t_f$	Fall Time	—	4.9	—		
$C_{\text{iss}}$	Input Capacitance	—	1450	—	pF	$V_{\text{GS}} = 0\text{V}$ $V_{\text{DS}} = 15\text{V}$ $f = 1.0\text{MHz}$
$C_{\text{oss}}$	Output Capacitance	—	310	—		
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	170	—		

**Diode Characteristics**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_s$	Continuous Source Current (Body Diode)	—	—	42	A	MOSFET symbol showing the integral reverse p-n junction diode.
	Pulsed Source Current (Body Diode) ②	—	—	100		
$V_{\text{SD}}$	Diode Forward Voltage	—	—	1.2	V	$T_J = 25^\circ\text{C}, I_s = 10\text{A}, V_{\text{GS}} = 0\text{V}$ ①
$t_{\text{rr}}$	Reverse Recovery Time	—	11	17	ns	$T_J = 25^\circ\text{C}, I_F = 10\text{A}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	10	15	nC	$\text{di}/\text{dt} = 500\text{A}/\mu\text{s}$ ① See Fig. 18

**Notes:**① Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

② Repetitive rating; pulse width limited by max. junction temperature.

### Absolute Maximum Ratings

	Parameter	Max.	Units
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ①	2.2	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation ①	1.4	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Power Dissipation ④	42	
T <sub>P</sub>	Peak Soldering Temperature	270	°C
T <sub>J</sub>	Operating Junction and Storage Temperature Range	-40 to + 150	
T <sub>STG</sub>			

### Thermal Resistance

	Parameter	Typ.	Max.	Units
R <sub>θJA</sub>	Junction-to-Ambient ①⑤	—	58	°C/W
R <sub>θJA</sub>	Junction-to-Ambient ②⑤	12.5	—	
R <sub>θJA</sub>	Junction-to-Ambient ③⑤	20	—	
R <sub>θJC</sub>	Junction-to-Case ④⑤	—	3.0	
R <sub>θJ-PCB</sub>	Junction-to-PCB Mounted	1.4	—	
	Linear Derating Factor ①	0.017		W/°C


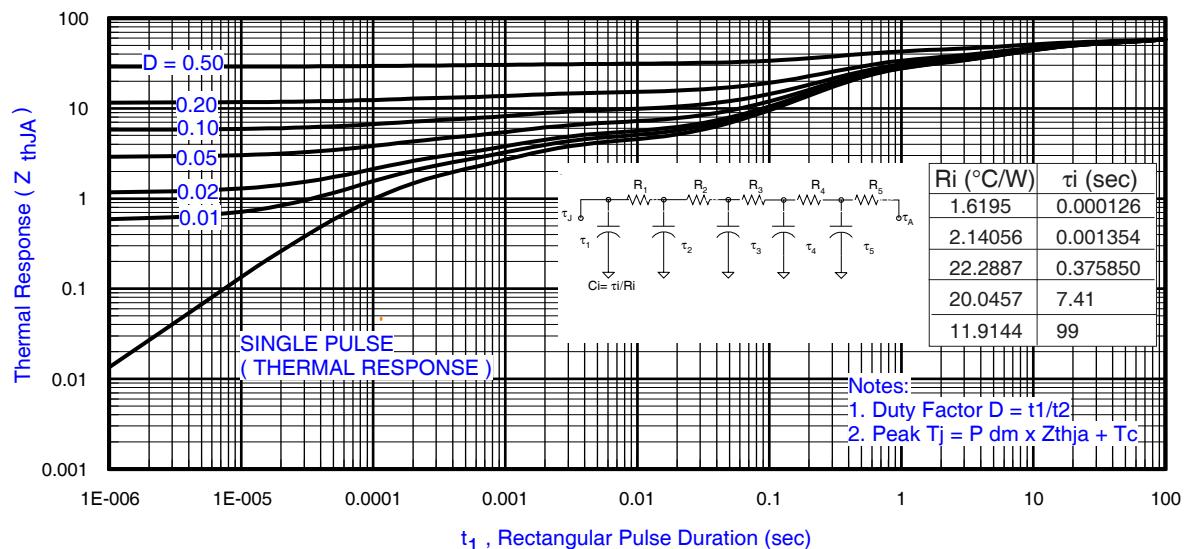


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ①

#### Notes:

- ① Surface mounted on 1 in. square Cu board, steady state.
- ② Used double sided cooling , mounting pad.
- ③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.


- ④ T<sub>C</sub> measured with thermocouple in contact with top (Drain) of part.
- ⑤ R<sub>θ</sub> is measured at T<sub>J</sub> of approximately 90°C.

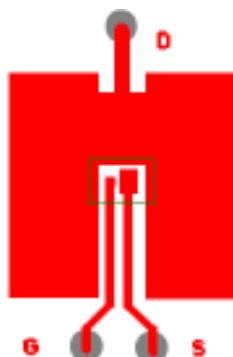

① Surface mounted on 1 in. square Cu board (still air).




② Mounted to a PCB with small clip heatsink (still air)

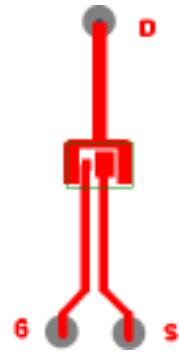


③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

# IRF6631


International  
Rectifier

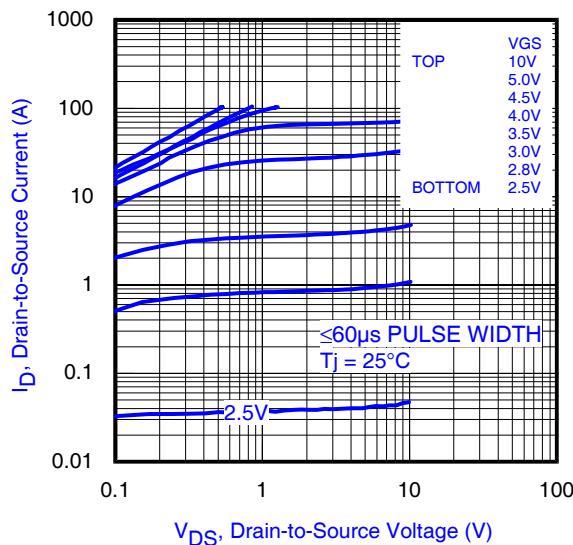


**Fig 4.** Typical Output Characteristics

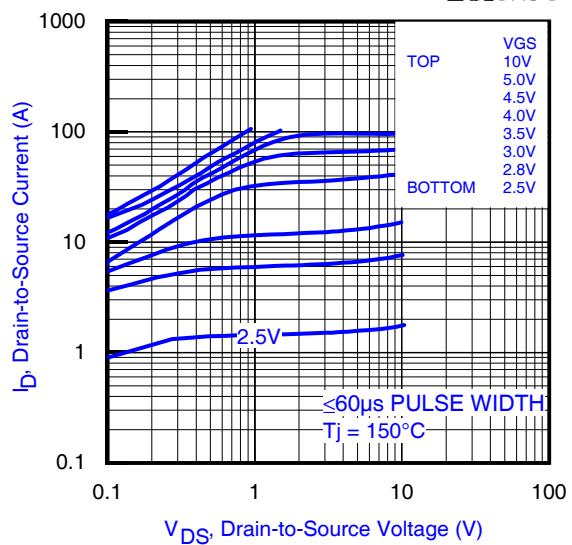


**Fig 5.** Typical Output Characteristics

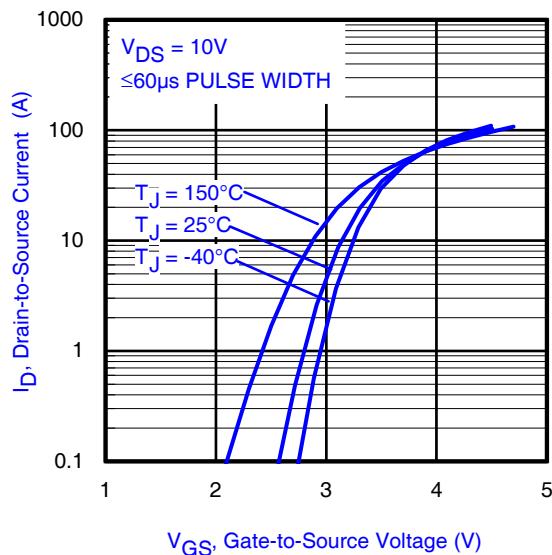


**Fig 6.** Typical Transfer Characteristics

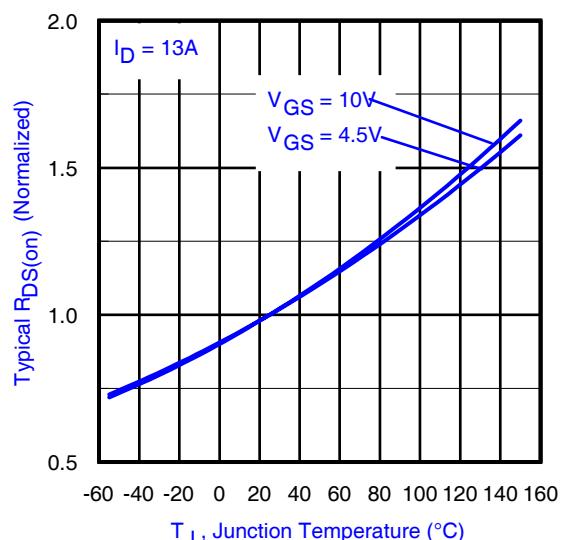


**Fig 7.** Normalized On-Resistance vs. Temperature

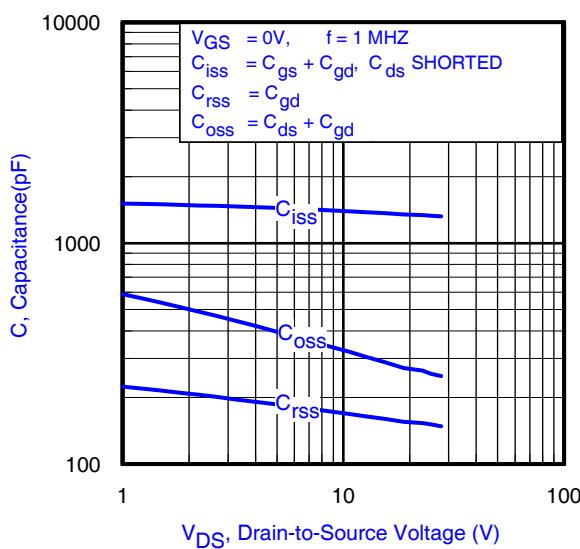


**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

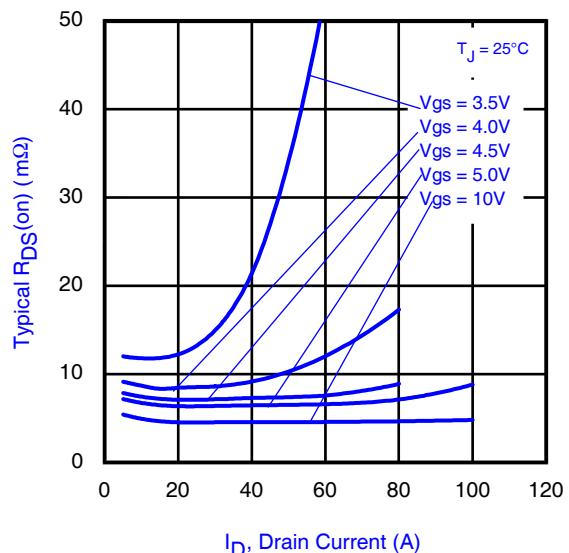


**Fig 9.** Typical On-Resistance Vs. Drain Current and Gate Voltage

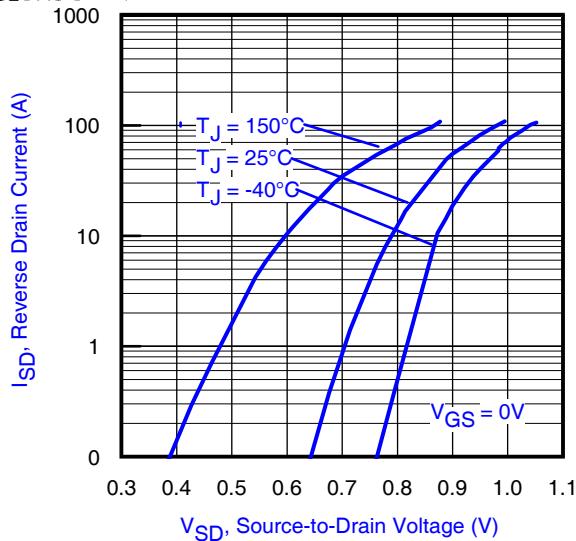


**Fig 10.** Typical Source-Drain Diode Forward Voltage

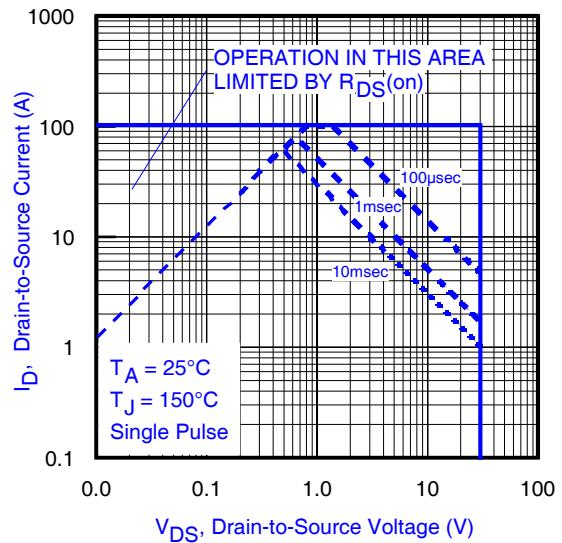


**Fig 11.** Maximum Safe Operating Area

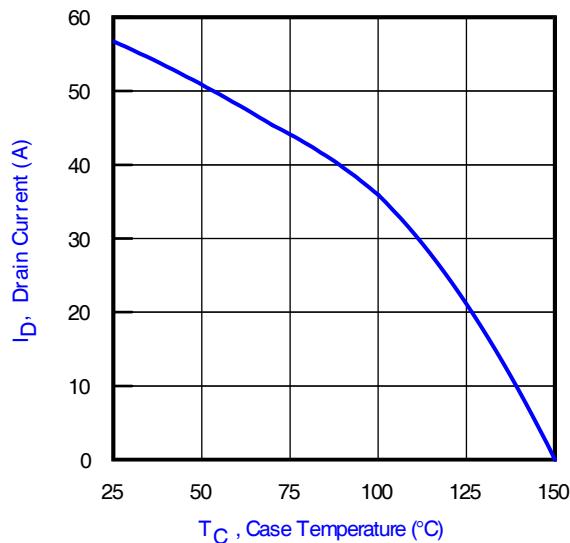

**Fig 12.** Maximum Drain Current vs. Case Temperature

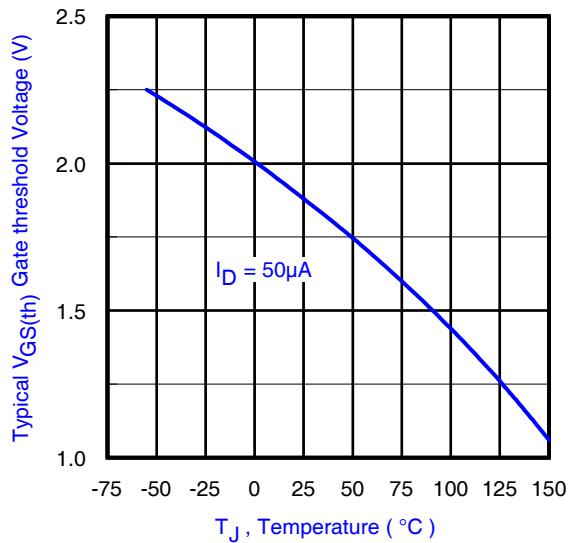


**Fig 13.** Typical Threshold Voltage vs. Junction Temperature

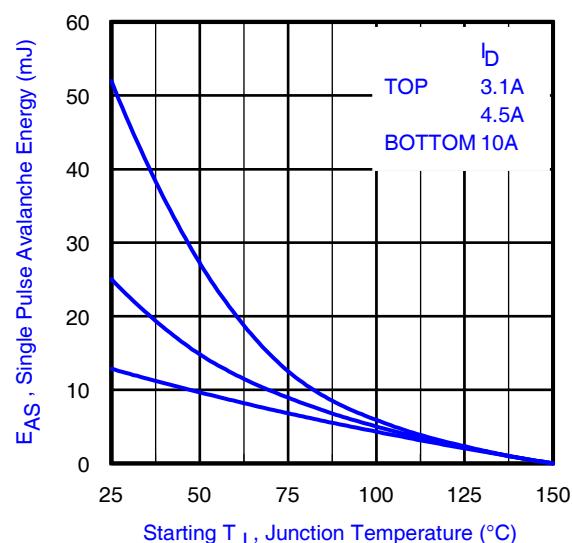


**Fig 14.** Maximum Avalanche Energy vs. Drain Current

# IRF6631


International  
**IR** Rectifier

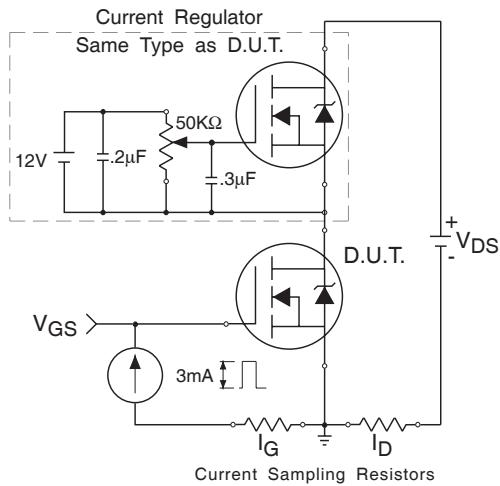


**Fig 15a.** Gate Charge Test Circuit

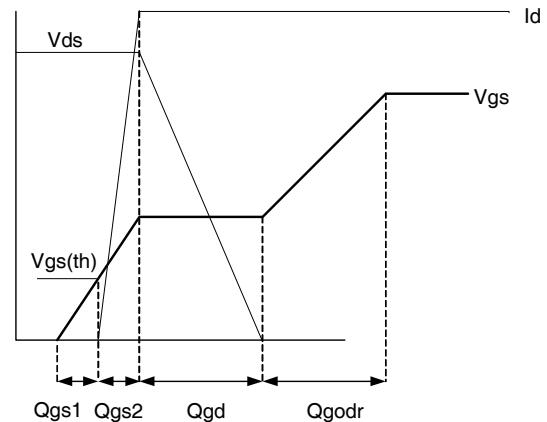


**Fig 15b.** Gate Charge Waveform

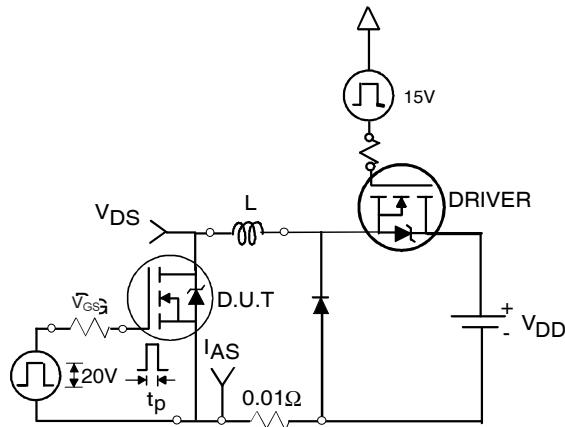


**Fig 16a.** Unclamped Inductive Test Circuit

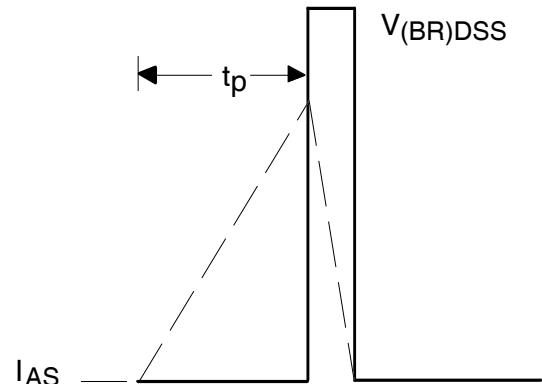


**Fig 16b.** Unclamped Inductive Waveforms

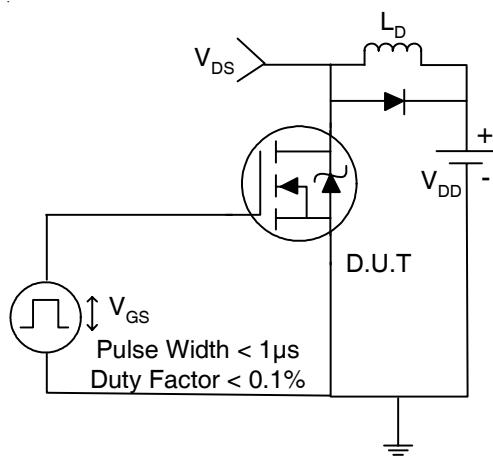

**Fig 17a.** Switching Time Test Circuit

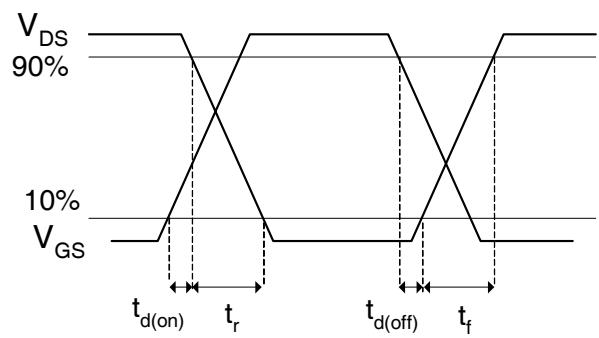


**Fig 17b.** Switching Time Waveforms

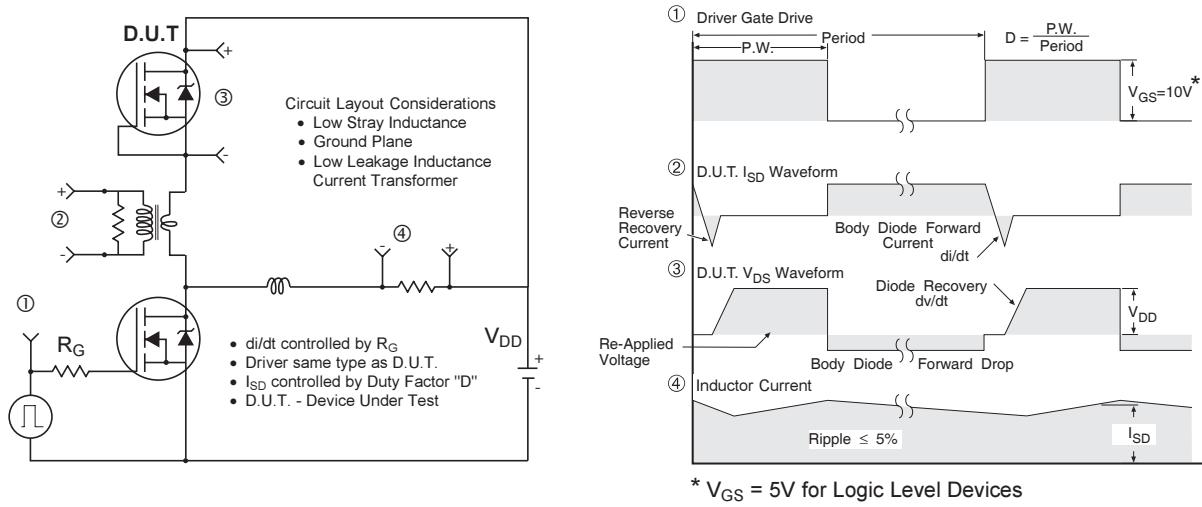

**Fig 18.** Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

### DirectFET™ Substrate and PCB Layout, SQ Outline (Small Size Can, Q-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

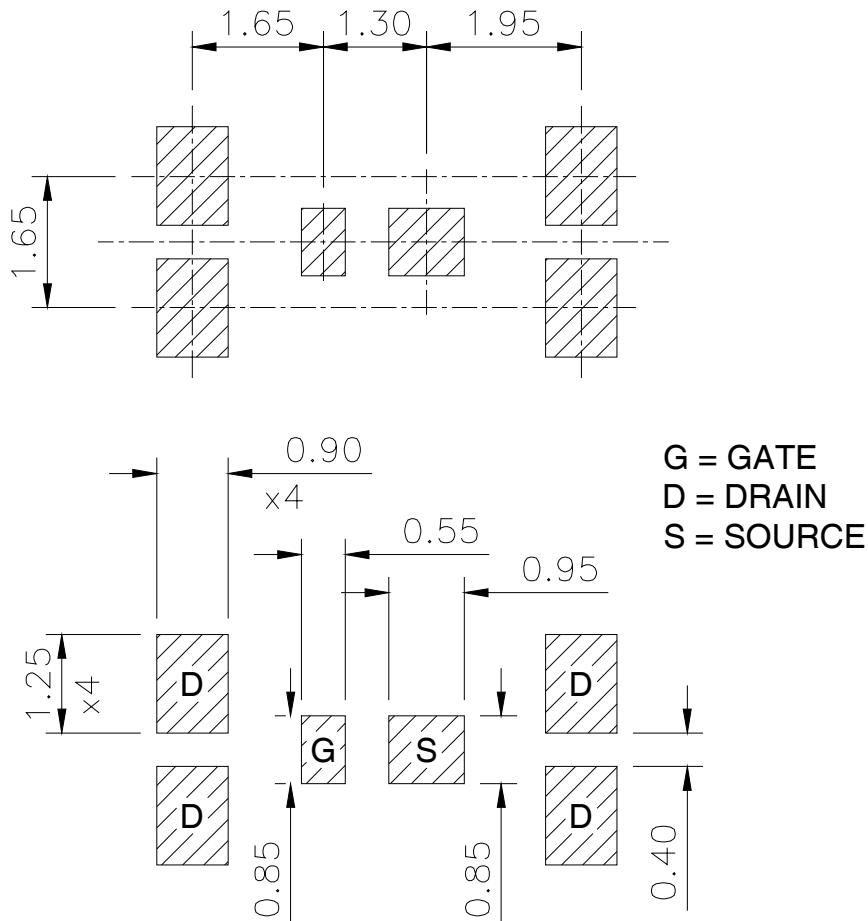


# IRF6631


International  
**IR** Rectifier

## DirectFET™ Outline Dimension, SQ Outline (Small Size Can, Q-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

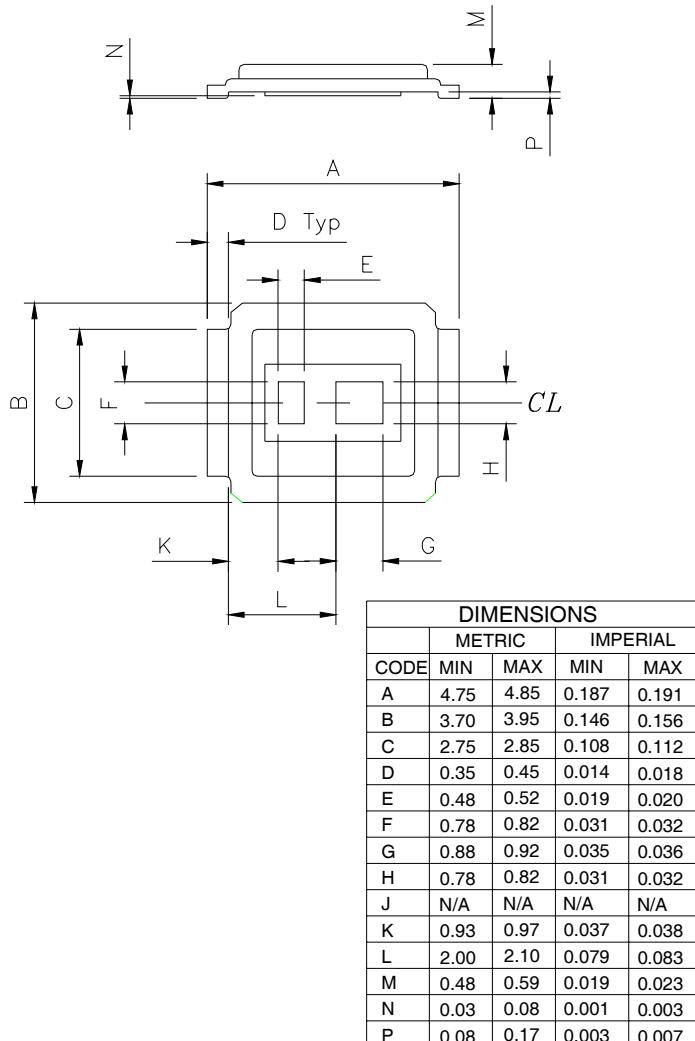

## DirectFET™ Part Marking

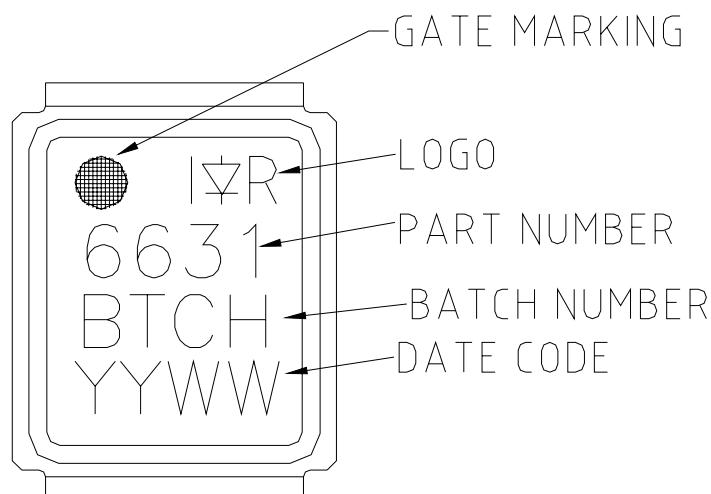


**DirectFET™ Tape & Reel Dimension  
(Showing component orientation).**

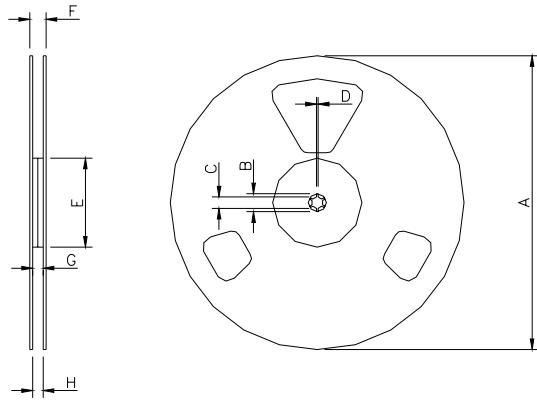

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6631). For 1000 parts on 7" reel,  
order IRF6631TR1

REEL DIMENSIONS								
CODE	STANDARD OPTION (QTY 4800)				TR1 OPTION (QTY 1000)			
	METRIC	MIN	MAX	IMPERIAL	MIN	MAX	MIN	MAX
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

Loaded Tape Feed Direction

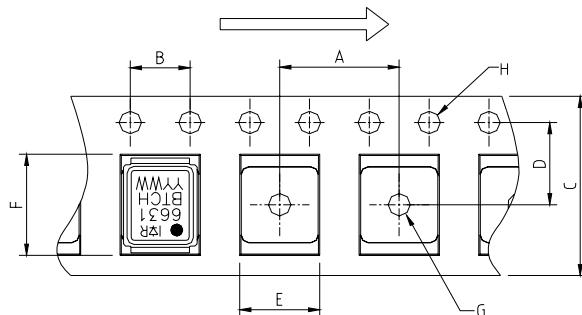

NOTE: CONTROLLING  
DIMENSIONS IN MM

CODE	DIMENSIONS			
	METRIC		IMPERIAL	
MIN	MAX	MIN	MAX	
A	7.90	8.10	0.311	0.319
B	3.90	4.10	0.154	0.161
C	11.90	12.30	0.469	0.484
D	5.45	5.55	0.215	0.219
E	4.00	4.20	0.158	0.165
F	5.00	5.20	0.197	0.205
G	1.50	N.C.	0.059	N.C.
H	1.50	1.60	0.059	0.063

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 02/06