


General Description

This Trench MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for Load switch and Back-Light Inverter.

FEATURES


- $V_{DSS}=40V$, $I_D=3.5A$
- Drain-Source ON Resistance
 $R_{DS(ON)}=45m\ \Omega$ (Max.) @ $V_{GS}=10V$
 $R_{DS(ON)}=62m\ \Omega$ (Max.) @ $V_{GS}=4.5V$
- Super Hige Dense Cell Design

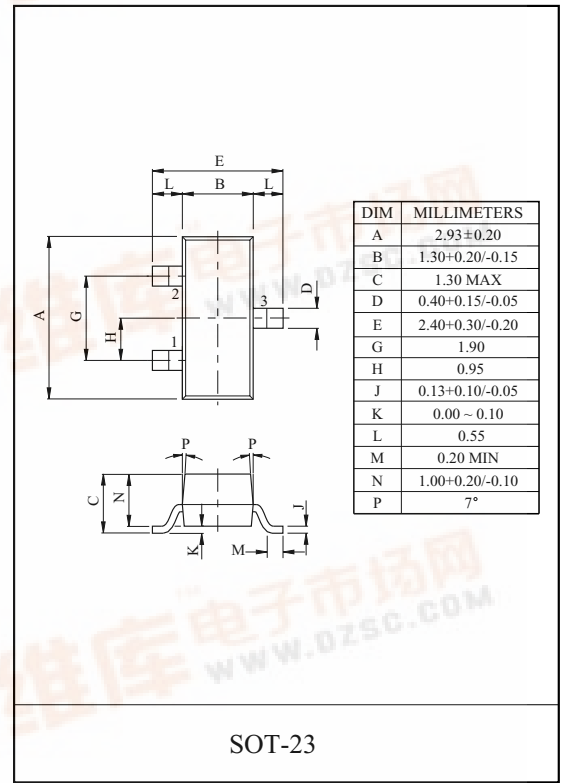

MAXIMUM RATING (Ta=25 °C)


CHARACTERISTIC		SYMBOL	N-Ch	UNIT
Drain-Source Voltage		V_{DSS}	40	V
Gate-Source Voltage		V_{GSS}	±20	V
Drain Current	DC@Ta=25 °C	I_D	3.5	A
	DC@Ta=70 °C		2.8	
	Pulsed	I_{DP}	14	
Drain-Source-Diode Forward Current		I_S	1.0	A
Drain Power Dissipation	Ta=25 °C	P_D	1.25	W
	Ta=70 °C		0.8	
Maximum Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C
Thermal Resistance, Junction to Ambient		R_{thJA}	100	°C/W

Marking

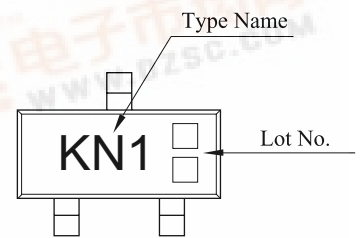

Note > *Surface Mounted on 1 × 1 FR4 Board, t ≤ 5sec

PIN CONNECTION (TOP VIEW)

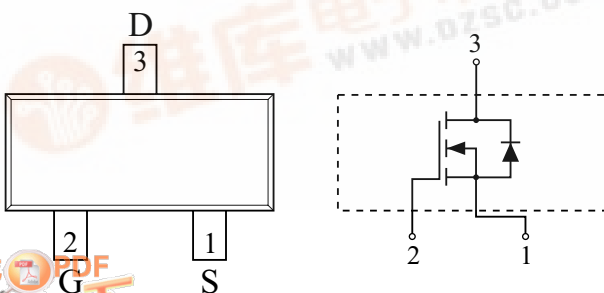

KMB3D5N40SA

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_{DS}=250\mu A, V_{GS}=0V,$	40	-	-	V
Drain Cut-off Current	I_{DSS}	$V_{GS}=0V, V_{DS}=32V$	-	-	0.5	μA
		$V_{GS}=0V, V_{DS}=32V, T_j=55^\circ C$	-	-	10	
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Gate Threshold Voltage	V_{th}	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	-	3.0	V
Drain-Source ON Resistance	$R_{DS(ON)}^*$	$V_{GS}=10V, I_D=3.5A$	-	36	45	m Ω
		$V_{GS}=4.5V, I_D=3.0A$	-	56	62	
On-State Drain Current	$I_{D(ON)}^*$	$V_{GS}=10V, V_{DS}\geq 4.5V$	6	-	-	A
Forward Transconductance	g_{fs}^*	$V_{DS}=10V, I_D=3.5A$	-	10	-	S
Dynamic						
Input Capacitance	C_{iss}	$V_{DS}=20V, f=1MHz, V_{GS}=0V$	-	315	-	pF
Output Capacitance	C_{oss}		-	69	-	
Reverse Transfer Capacitance	C_{rss}		-	39	-	
Total Gate Charge	Q_g^*	$V_{DS}=20V, V_{GS}=0V, I_D=3.5A$	-	6.4	10	nC
Gate-Source Charge	Q_{gs}^*		-	0.7	-	
Gate-Drain Charge	Q_{gd}^*		-	2.1	-	
Turn-On Delay Time	$t_{d(on)}^*$	$V_{DD}=20V, V_{GS}=10V$ $I_D=1A, R_G=6\Omega$	-	5	10	ns
Turn-On Rise Time	t_r^*		-	12	20	
Turn-On Delay Time	$t_{d(off)}^*$		-	20	30	
Turn-On Fall Time	t_f^*		-	15	25	
Source-Drain Diode Ratings						
Source-Drain Forward Voltage	V_{SDF}^*	$V_{GS}=0V, I_S=1A$	-	0.8	1.2	V
Note > *Pulse Test : Pulse width <300 μs , Duty cycle < 2%						

KMB3D5N40SA

Fig1. $I_D - V_{DS}$

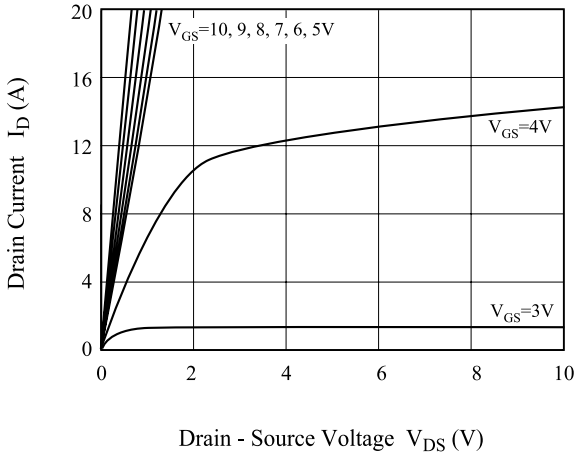


Fig2. $R_{DS(ON)} - I_D$

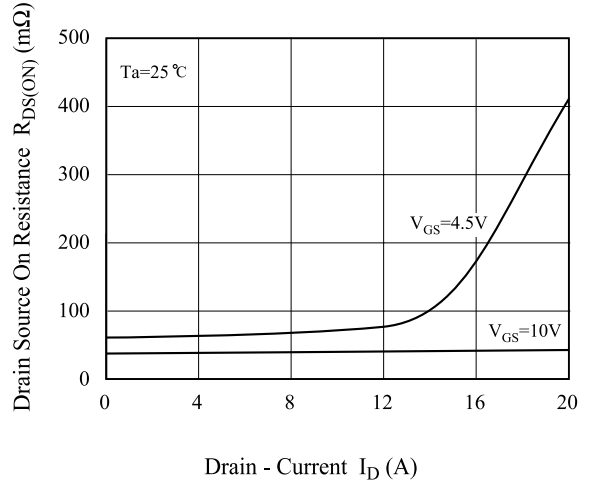


Fig3. $I_D - V_{GS}$

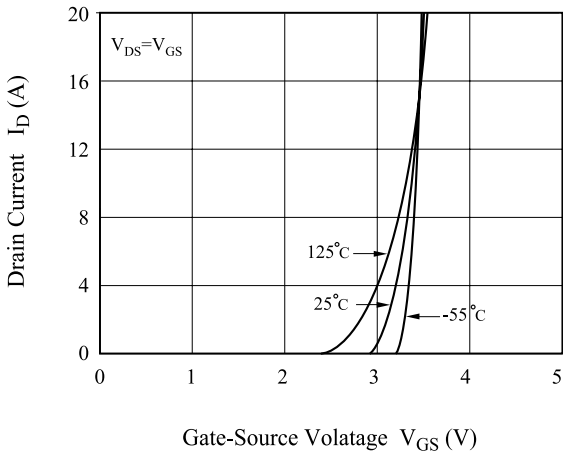


Fig4. $R_{DS(ON)} - T_j$

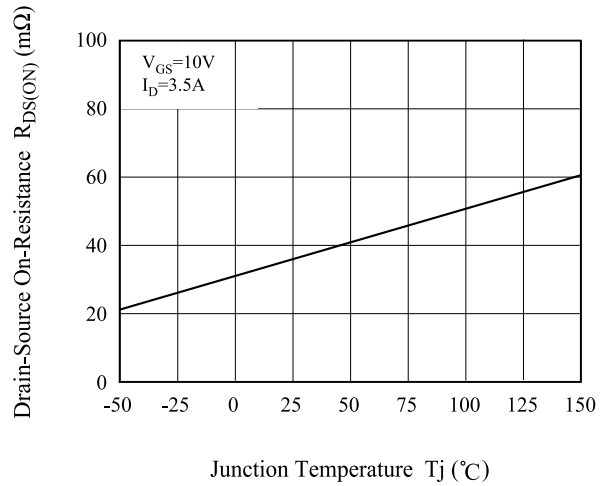


Fig5. $V_{th} - T_j$


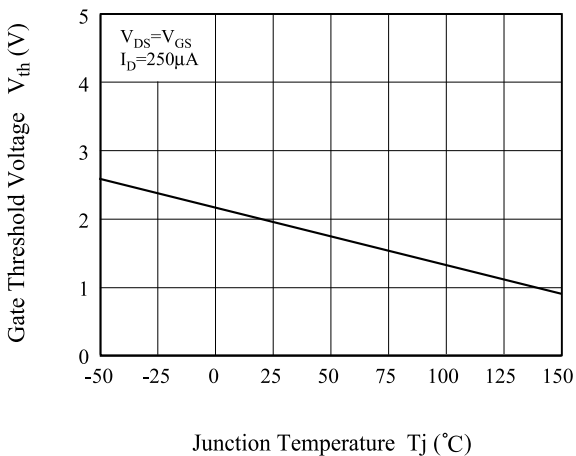


Fig6. $I_S - V_{SDF}$

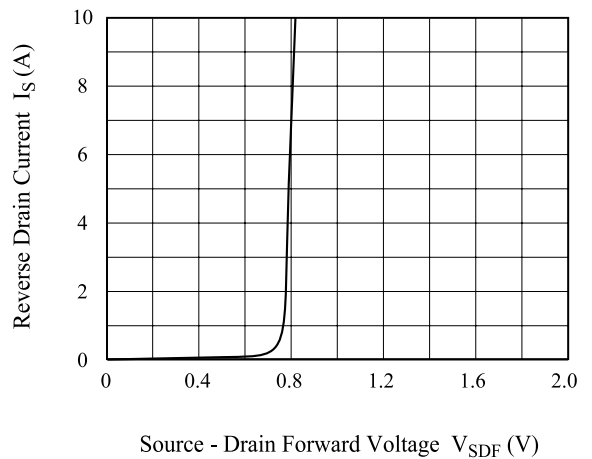

KMB3D5N40SA

Fig7. $V_{GS} - Q_g$

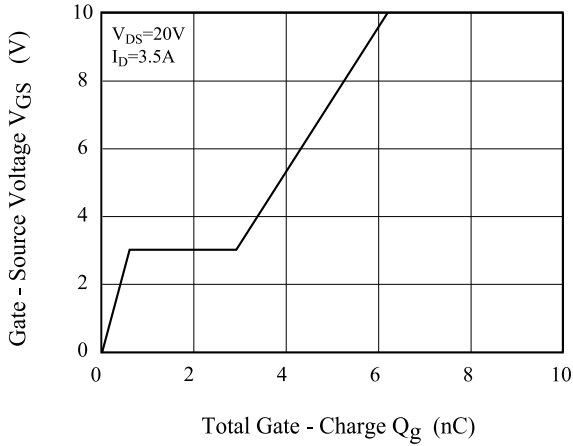


Fig8. $C - V_{DS}$

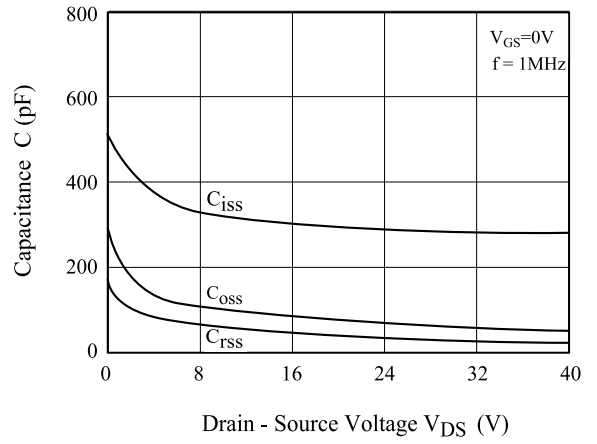


Fig9. Safe Operation Area


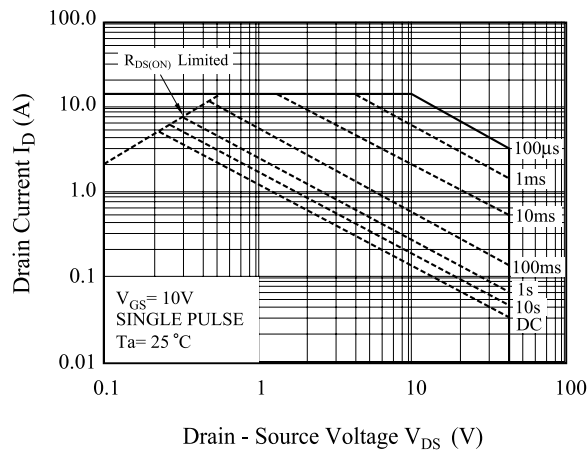


Fig10. Transient Thermal Response Curve

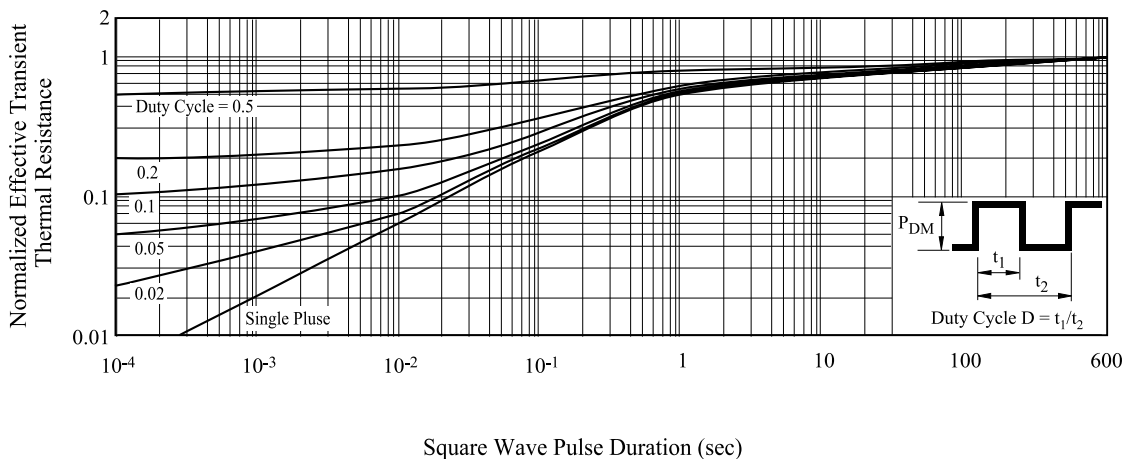

KMB3D5N40SA

Fig11. Gate Charge Circuit and Wave Form

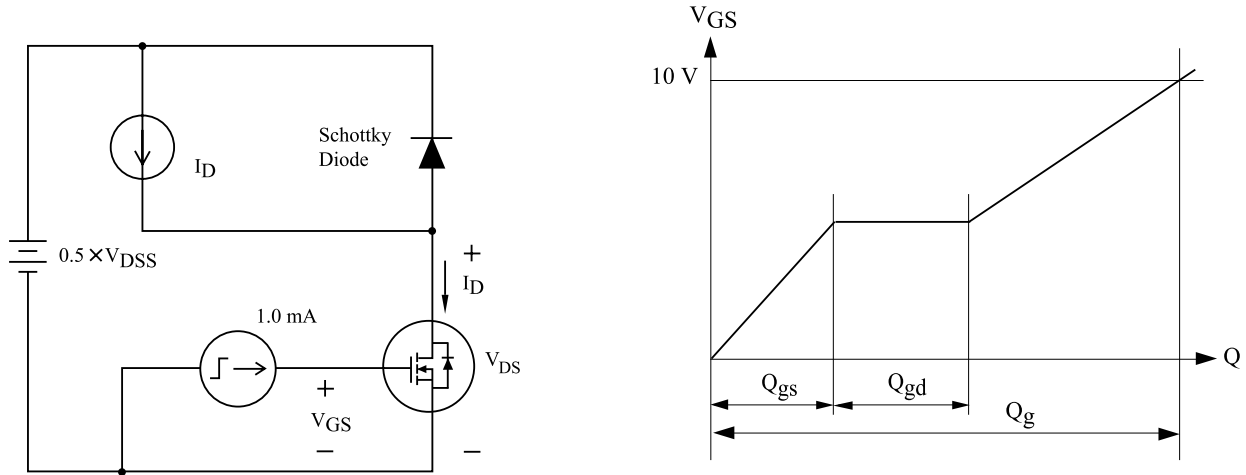


Fig12. Resistive Load Switching

