

cosmo**Photo Link Connector****KPLT1320AD**


FIBER OPTIC TRANSMITTING MODULE
FOR DIGITAL AUDIO EQUIPMENT

Features

- TTL interface.
- LED is driven by differential circuit.

Applications

- Audio equipment.
- DVD player.
- Automobile.

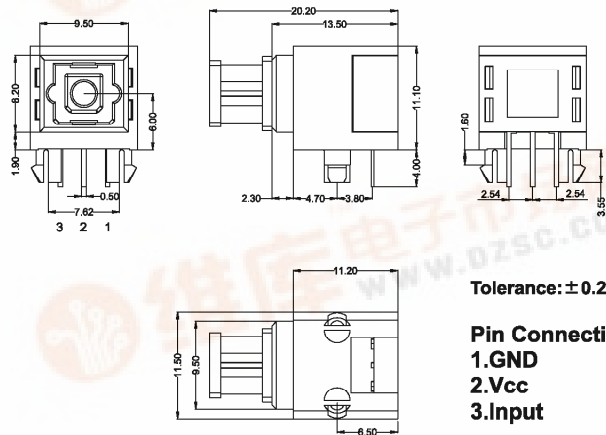Outline Dimensions (Unit:mm)**1. Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Storage Temperature	T_{stg}	-40~80	°C
Operating Temperature	T_{opr}	-20~70	°C
Power Dissipation	P_{max}	120	mW
Supply Voltage	V_{CC}	-0.5~7	V
Input Voltage	V_{IN}	-0.5~ $V_{\text{CC}}+0.5$	V
Soldering Temperature	T_{sol}	260 (Note 1)	°C

Note 1 : Soldering time ≤ 10 seconds (At a distance of 1 mm from the package.)

2. Recommended Operating Conditions

Parameter	Symbol	Min	Typ.	Max	Unit
Supply Voltage	V_{CC}	4.75	5.0	5.25	V
High-Level Input Voltage	V_{IH}	2.0	-	V_{CC}	V
Low-Level Input Voltage	V_{IL}	0	-	0.8	V

3. Electrical and Optical Characteristics (Ta=25°C, V_{CC}=5V)

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Data Rate		NRZ Signal (Note 2)	DC	-	13.2	Mb/s
Transmission Distance		Using APF (Note 3)	0.2	-	5	m
Fiber Output Power (Note 4)	P _f		-21	-	-15	dBm
Peak Emission Wavelength	λ _p		630	650	690	nm
Current Consumption	I _{CC}		-	-	13	mA
High Level Input Voltage	V _{IH}		2.0	-	-	V
Low Level Input Voltage	V _{IL}		-	-	0.8	V
Low->High Propagation delay time	t _{PLH}				150	ns
High -> Low Propagation delay time	t _{PHL}				150	ns
Pulse Width Distortion	Δtw	6Mbps NRZ Signal	-25	-	25	ns
Jitter Time	Δtj				25	ns

Note 2 :LED is on when input signal is high, and off when it is low.


The duty factor must be maintained between 25 to 75%.

Note 3 :All Plastic Fiber (970 / 1000nm.)


Note 4 :Measure with a standard optical fiber, peak value.

4. Measuring method




(1).Measuring method of optical output coupling fiber

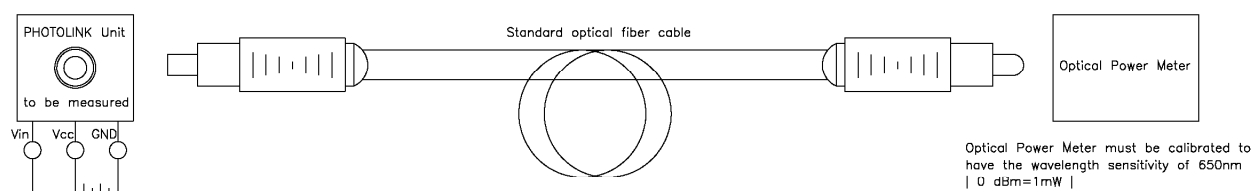



(2).Measuring method of power dissipation current and input voltage

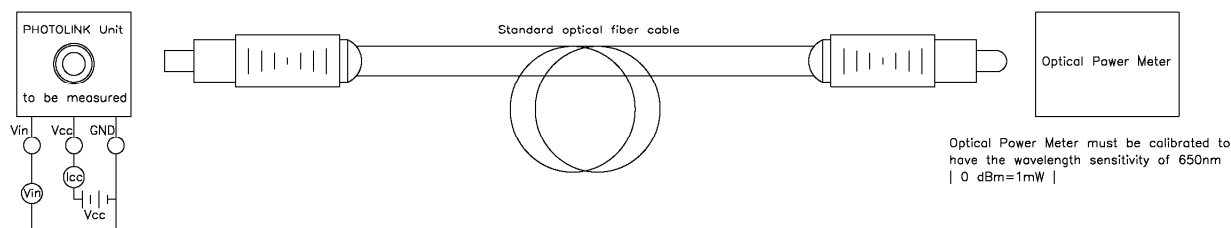


(3).Measuring method of Pulse response

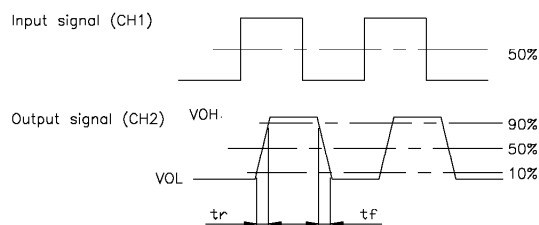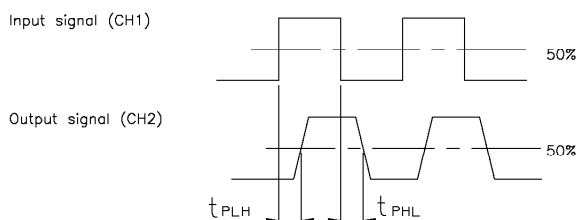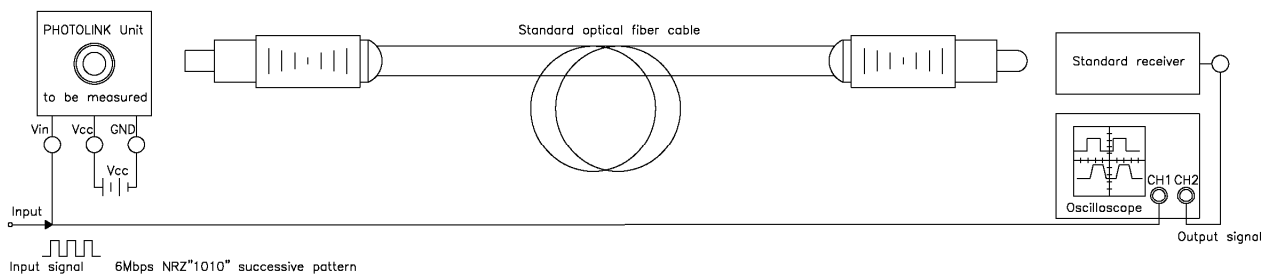

(4).Measuring method of Jitter

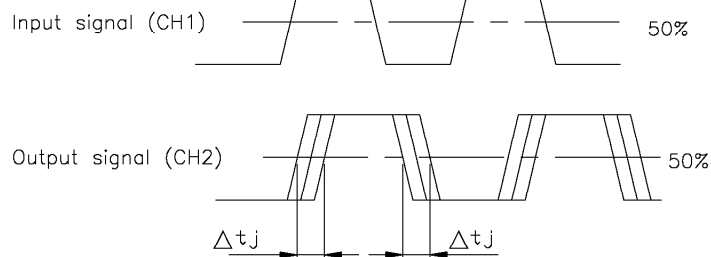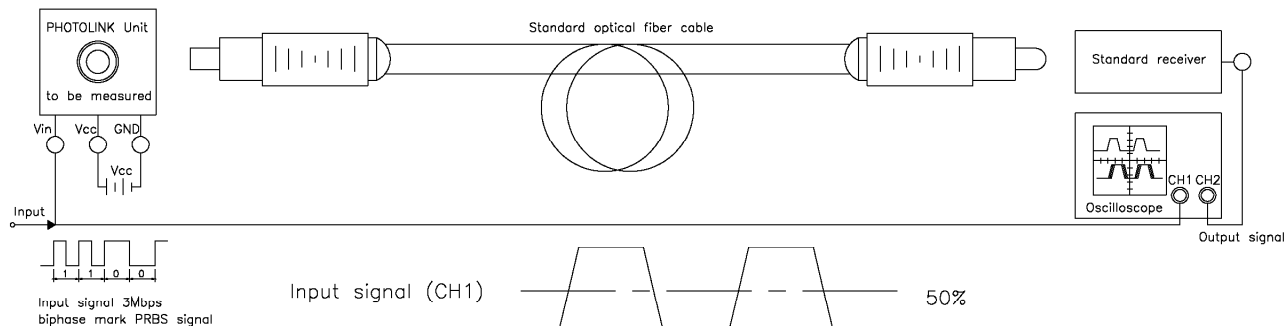

5.Recommended PCB Layout

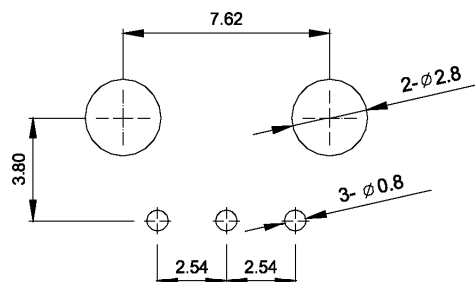

Notes:

1.Unit:mm

2.Tolerance:± 0.3mm