

VI TELEFILTER

Filter Specification

TFS 36 F

Description

IF filter for digital cable TV

Measurement condition

Ambient temperature T_A : 25 °C
 Input power level: 0 dBm
 Terminating impedance: source: 50 Ω
 load: 2 kΩ || 3 pF

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 36F is the insertion loss. The insertion loss a_e is defined as the insertion loss at the nominal frequency f_N .

D a t a		typ. Value		Limit			
Insertion loss (reference level)		19,6	MHz	20,3	± 1,5	dB	
Nominal frequency	f_N	-				36,125 MHz	
Centre frequency	f_C at ambient temperature T_A	-				36,125 MHz ± 0,055 MHz	
Bandwidth	1 dB	7,5	MHz			-	
	3 dB	7,9	MHz			-	
	30 dB	9,3	MHz			-	
Group delay ripple	p-p in $f_C \pm 3,75$ MHz	40	ns			-	
Relative attenuation	a_{rel}						
		32,32 MHz	1,6	dB		-	
		39,93 MHz	1,2	dB	1,1	± 1	dB
		32,13 MHz	3,8	dB	3,1	± 1,2	dB
		40,13 MHz	3,4	dB	3,2	± 1,2	dB
		31,25 MHz	41	dB	min.	35	dB
		47,25 MHz	47	dB	min.	42	dB
	lower side lobe	25,00 ... 29,50 MHz	42	dB	min.	36	dB
		29,50 ... 31,25 MHz	39	dB	min.	32	dB
	upper side lobe	40,90 ... 43,50 MHz	35	dB	min.	32	dB
	43,50 ... 50,00 MHz	41	dB	min.	36	dB	
Reflected wave signal suppression		55	dB	min.	42	dB	
1,2 µs...6,0 µs after main pulse							
Feedthrough signal suppression		53	dB	min.	50	dB	
Operable temperature range		-		-25 ...	65	° C	
Storage temperature range		-		-40 ...	85	° C	
Temperature coefficient of frequency TC_f^*		- 0,072	ppm / K			-	

*) $\Delta f_C(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_A) \times f_{CAT}(\text{MHz})$

generated:

checked / approved:


TELEFILTER GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.



Construction and pin connection

(all dimensions in mm)

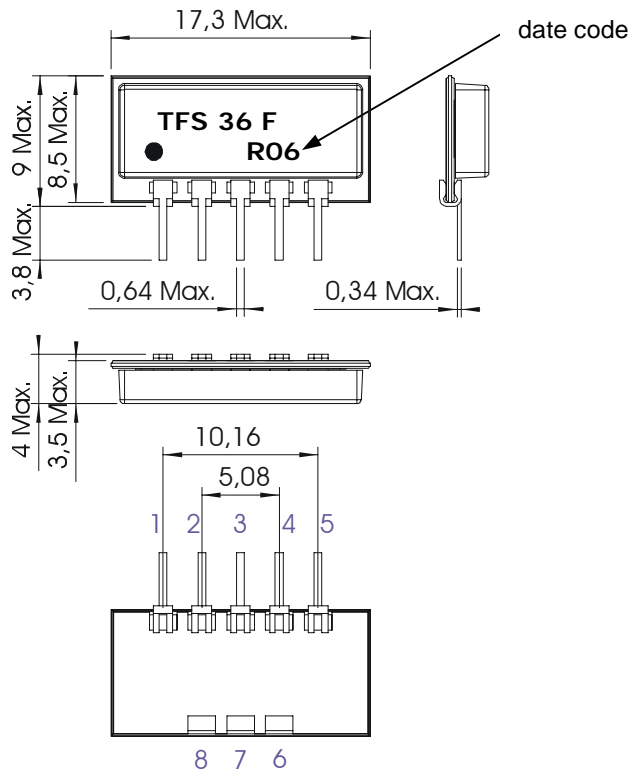

- | | |
|-------|-------------------------------|
| 1 | input |
| 2 | input - ground |
| 3 | chip carrier - ground |
| 4 | output |
| 5 | output |
| 6,7,8 | internally connected to pin 3 |

date code: year + week
 N 2001
 P 2002
 R 2003
 ...

VI TELEFILTER**Filter Specification****TFS 36 F****3/5**

Stability Characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4;

Packing

Tape & Reel: DIN IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

VI TELEFILTER**Filter Specification****TFS 36 F****4/5****Air reflow temperature conditions**1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C – 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. – 90 sec.	20 sec. – 25 sec.	

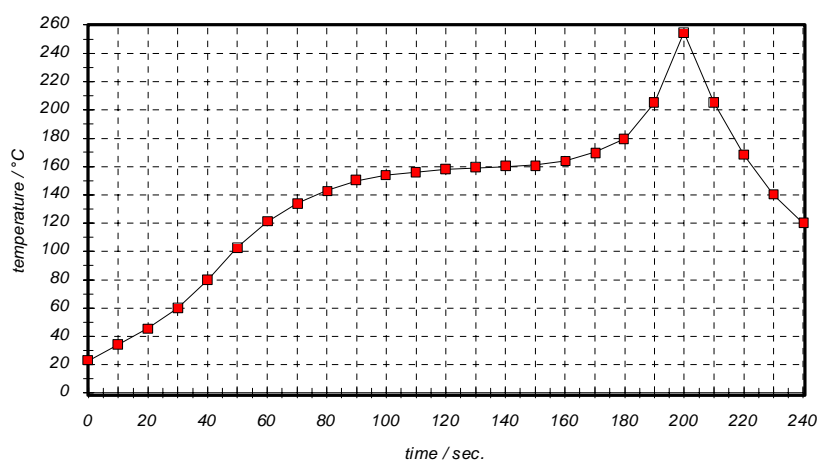
Chip-mount air reflow profile

Table for temperature vs. Time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	Temperature / °C	time / sec.	Temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter Specification****TFS 36 F****5/5****History**

Version	Reason of Changes	Name	Date
1.0	generate specification	Pfeiffer	01.08.2002
1.1	change package	Pfeiffer	29.11.2002
1.2	add typical values	Pfeiffer	07.02.2003