

VI TELEFILTER

Filter Specification

TFS 76

1/5

1. Measurement condition

Ambient temperature T_A : 23 °C
 Input power level: 0 dBm
 Terminating impedances at f_C *):
 for input: 56 Ω // 28,5 pF
 for output: 50 Ω // 0 pF

2. Characteristics

Remark: Reference level for the relative attenuation a_{rel} of the **TFS 76** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 1 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency T_C is valid for both the reference frequency f_C and the frequency response of the filter in the operating temperature range.

Data	typ. value	tolerance / limit
Insertion Loss (Reference level) a_e	20,8 dB	max. 23 dB
Centre Frequency at ambient temperature f_C	76,8 MHz $\pm$	75 kHz
Passband PB	$f_C \pm$	3,2 MHz
Relative Attenuation a_{rel}		
f_C $f_C \pm$ 3,20 MHz	0,35 dB	max. 0,7 dB
$f_C \pm$ 3,20 MHz $f_C \pm$ 3,50 MHz		max. 1 dB
$f_C \pm$ 3,65 MHz $f_C \pm$ 4,85 MHz		min. 1 dB
$f_C \pm$ 4,85 MHz $f_C \pm$ 5,00 MHz	61 dB	min. 51 dB
$f_C -$ 71,8 MHz $f_C -$ 5,00 MHz	65 dB	min. 50 dB
$f_C +$ 5,00 MHz $f_C +$ 123,20 MHz	55 dB	min. 50 dB
Deviation from Linear Phase in PB	0,2 °rms	max. 2 °rms
Group Delay Ripple in PB	60 ns	max. 100 ns
Average Group Delay in PB	1,9 μ s	max. 3 μ s
Temperature Coefficient of Frequency	- 76 ppm/K	
Operating Temperature Range		- 0 °C ... + 70 °C
Storage Temperature Range		- 20 °C ... + 80 °C

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions, do not hesitate to ask for an application note or contact our design team.

generated:

checked / approved:

VI TELEFILTER


Potsdamer StraÙe 18
 D 14 513 TELTOW / Germany
 Tel.: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.

267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

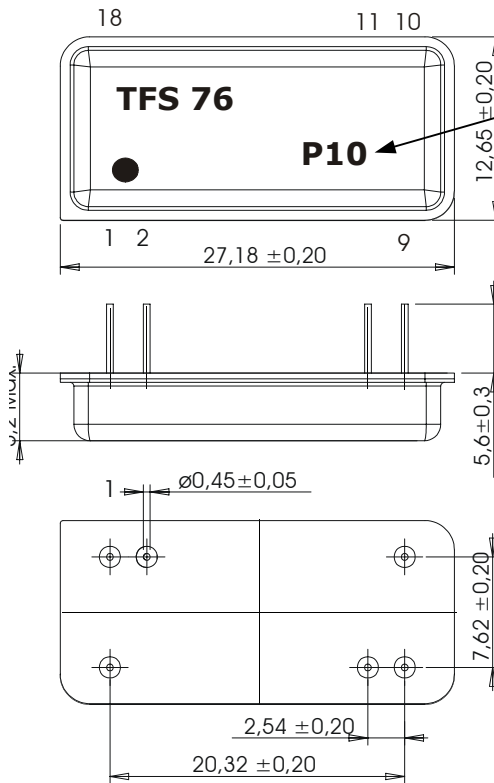


VI TELEFILTER**Filter Specification****TFS 76****2/5****3. Package**

date code: year + week
 M 2000
 N 2001
 P 2002

Pin Configuration

Input: 1
 Input Return: 18
 Output: 10
 Output Return: 9
 Ground: 2, 11

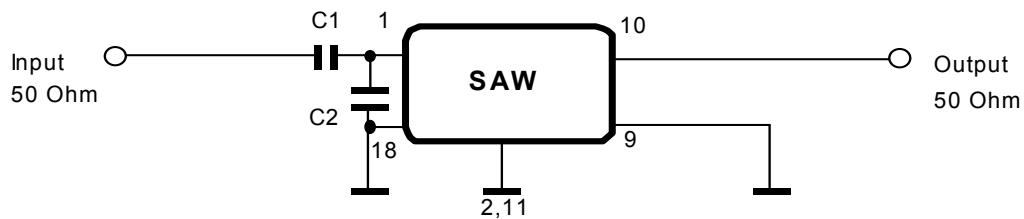4. 50 Ω matching network :

VI TELEFILTER**Filter Specification****TFS 76****3/5****5. Stability Characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page

VI TELEFILTER**Filter Specification****TFS 76****4/5****7. Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

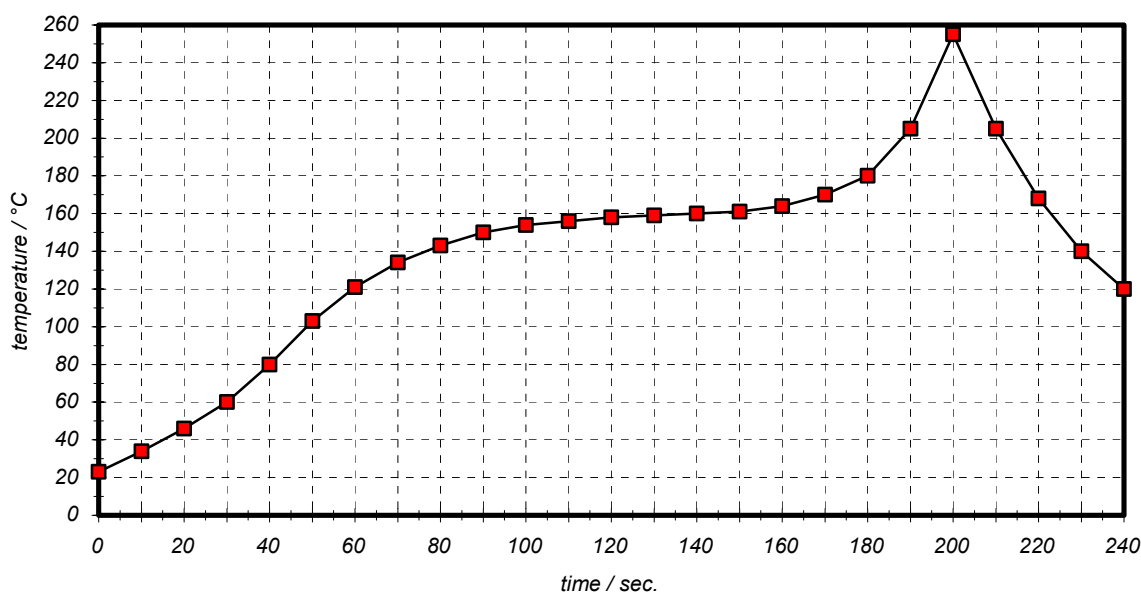
Air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter Specification****TFS 76****5/5****8. History**

Version	Reason of Changes	Name	Date
1.0	- generate specification according to customer requirements	Pfeiffer	14.06.2001
1.1	- typical values and terminating impedance added - changing from nominal frequency attenuation related to centre frequency attenuation related - reducing max. insertion loss to 23 dB	Pfeiffer	20.02.2002
1.2	- changing package, matching configuration and terminating impedance	Pfeiffer	01.03.2002