



6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series

Features

- TIL11X series: TIL111, TIL117
- MCT2X series: MCT2, MCT2E
- High isolation voltage between input and output
Viso = 5000 Vrms
- Creepage distance >7.6mm
- Compact dual-in-line package
- Operating temperature up to +110°C
- Pb free and RoHS compliant.
- UL approved (No. E214129)
- VDE approved (No. 132249)
- SEMKO approval (No.716108 / No. 716109)
- NEMKO approved (No. P06206474)
- DEMKO approved (No. 313924)
- FIMKO approved (No. FI 22807)
- CSA approval (No.1969132)

Description

The TIL11X series and MCT2X series of devices each consist of an infrared emitting diode optically coupled to a phototransistor detector.


They are packaged in a 6-pin DIP package and available in wide-lead spacing and SMD option.

Applications

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs
- Appliance system
- Industrial controls



Schematic

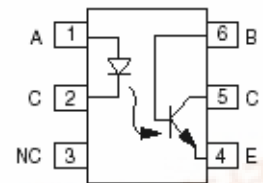

1. Anode
2. Cathode
3. No Connection
4. Emitter
5. Collector
6. Base



6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Peak forward current ($t = 10\mu\text{s}$)	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	70	mW
	Derating factor (above 100°C)		3.8	mW/ $^{\circ}\text{C}$
Output	Collector power dissipation	P_C	150	mW
	Derating factor (above 100°C)		9.0	mW/ $^{\circ}\text{C}$
	Collector-Emitter voltage	V_{CEO}	80	V
	Collector-Base voltage	V_{CBO}	80	V
	Emitter-Collector voltage	V_{ECO}	7	V
Total power dissipation		P_{tot}	200	mW
Isolation voltage ^{*2}		V_{iso}	5000	V _{rms}
Operating temperature		T_{opr}	-55~+110	$^{\circ}\text{C}$
Storage temperature		T_{stg}	-55~+125	$^{\circ}\text{C}$
Soldering temperature ^{*3}		T_{sol}	260	$^{\circ}\text{C}$

Notes

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 & 3 are shorted together, and pins 4, 5 & 6 are shorted together.

*2 For 10 seconds.

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	TIL111	-	1.22	1.4	V	$I_F = 16\text{mA}$
	TIL117	-	-	1.4		$T_A=0-70^\circ\text{C}, I_F = 16\text{mA}$
		-	1.32	-		$T_A=-55^\circ\text{C}, I_F = 16\text{mA}$
		-	1.1	-		$T_A=110^\circ\text{C}, I_F = 16\text{mA}$
	MCT2 MCT2E	-	1.23	1.5		$I_F = 20\text{mA}$
Reverse current	I_R	-	-	10	μA	$V_R = 6\text{V}$

Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Collector-Base dark current	I_{CBO}	-	-	20	nA	$V_{CB} = 10\text{V}$
Collector-Emitter dark current	All	-	1	50	nA	$V_{CE} = 10\text{V}, I_F = 0\text{mA}$
	TIL117	-	0.2	50	μA	$V_{CE} = 30\text{V}, I_F = 0\text{mA}, T_A=70^\circ\text{C}$
Collector-Emitter breakdown voltage	BV_{CEO}	80	-	-	V	$I_C = 1\text{mA}$
Collector-Base breakdown voltage	BV_{CBO}	80	-	-	V	$I_C = 0.01\text{mA}$
Emitter-Collector breakdown voltage	BV_{ECO}	7	-	-	V	$I_E = 0.1\text{mA}$
Emitter-Base breakdown voltage	BV_{EBO}	7	-	-	V	$I_E = 0.1\text{mA}$

Transfer Characteristics

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition	
Collector current (Phototransistor operation)	TIL111	$I_{C(ON)}$	2	-	-	mA	$I_F = 16\text{mA}, V_{CE} = 0.4\text{V}$
Collector current (Photodiode operation)			7	-	-	μA	$I_F = 16\text{mA}, V_{CB} = 0.4\text{V}$
Current Transfer Ratio	TIL117	CTR	50	-	-	%	$I_F = 10\text{mA}, V_{CE} = 10\text{V}$
	MCT2 MCT2E		20	-	-		$I_F = 10\text{mA}, V_{CE} = 10\text{V}$

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series







Transfer Characteristics

Parameter		Symbol	Min.	Typ.*	Max.	Unit	Condition
Collector-Emitter saturation voltage	All	$V_{CE(sat)}$	-	-	0.4	V	$I_F = 16mA, I_C = 2mA$
	TIL117		-	-	0.4		$I_F = 10mA, I_C = 0.5mA$
Isolation resistance		R_{IO}	10^{11}	-	-	Ω	$V_{IO} = 500Vdc$
Input-output capacitance		C_{IO}	-	-	2	pF	$V_{IO} = 0, f = 1MHz$
Turn-on time	TIL117	T_{on}	-	10	12	μs	$V_{CC} = 10V,$ $I_C = 2mA, R_L = 100\Omega$
Turn-off time	TIL117	T_{off}	-	9	12		
Rise time	TIL117 TIL111	t_r	-	6	10		
Fall time	TIL117 TIL111	t_f	-	8	10		
Turn-on time	MCT2 MCT2E	T_{on}	-	3	10	μs	$V_{CC} = 10V,$ $I_F = 10mA, R_L = 100\Omega$
Turn-off time	MCT2 MCT2E	T_{off}	-	3	10		
Rise time	MCT2 MCT2E	t_r	-	3	10		
Fall time	MCT2 MCT2E	t_f	-	3	10		

* Typical values at $T_a = 25^\circ C$

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series

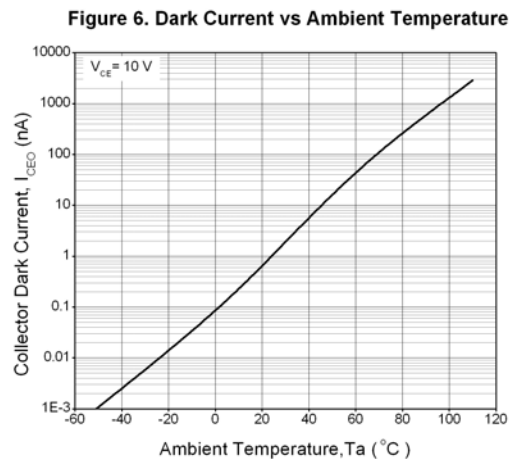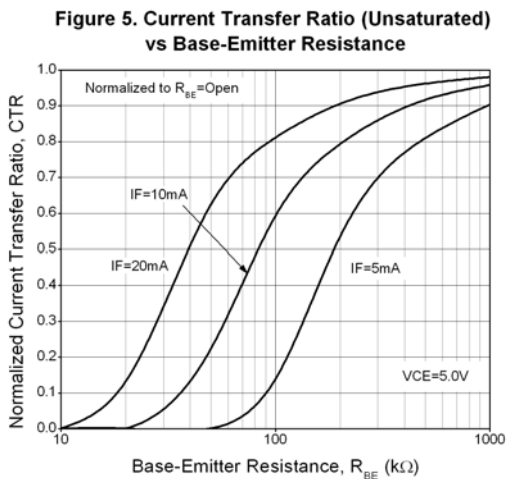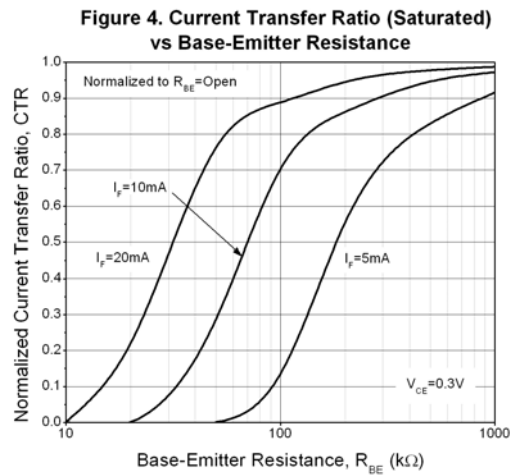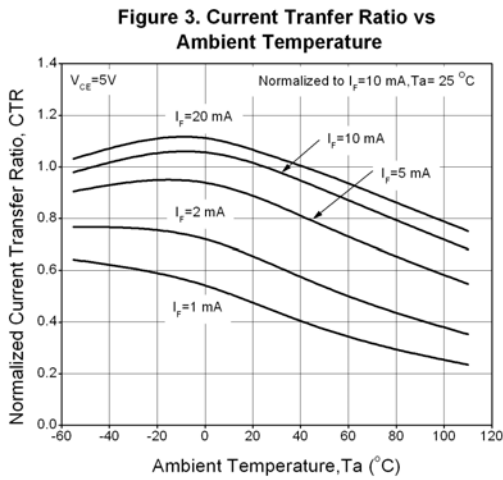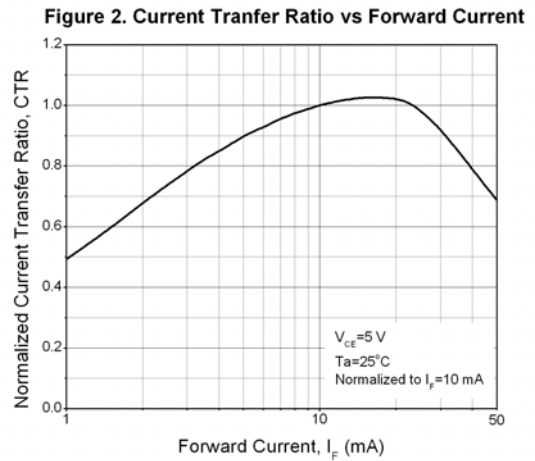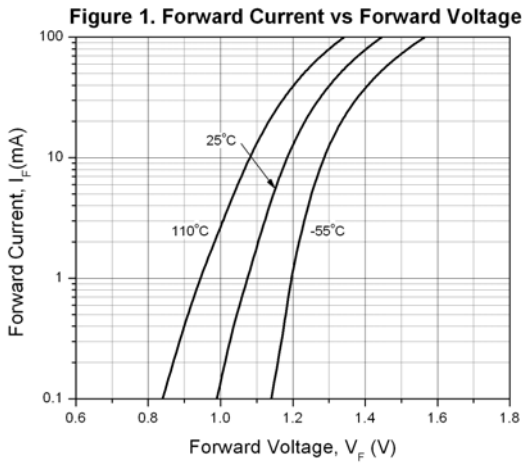

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series MCT2X Series






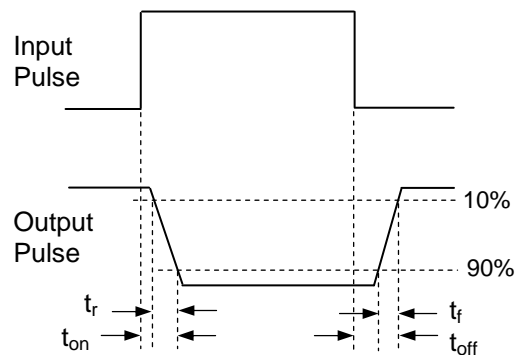


Figure 11. Switching Time Test Circuit & Waveforms

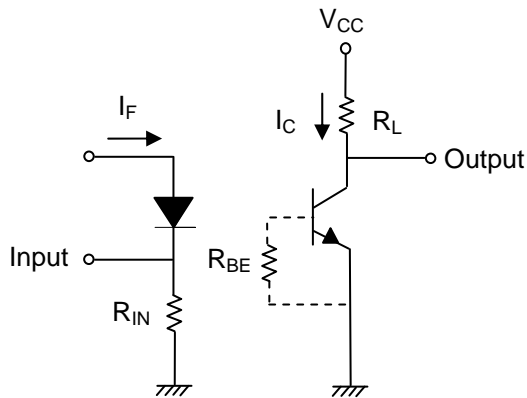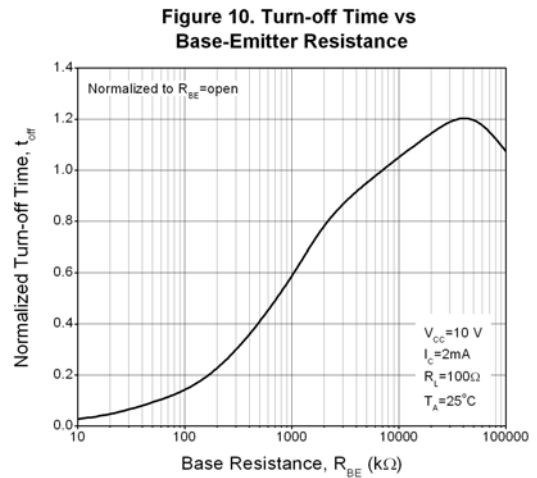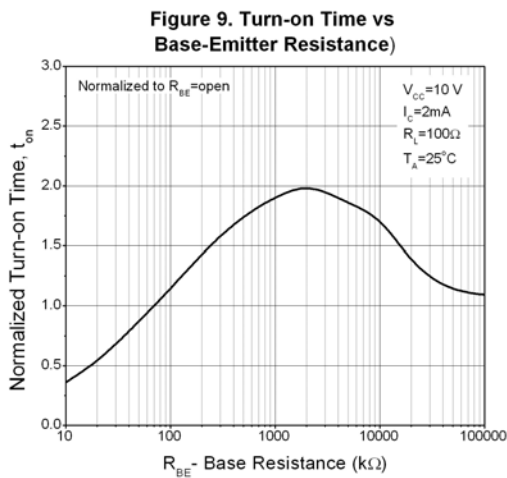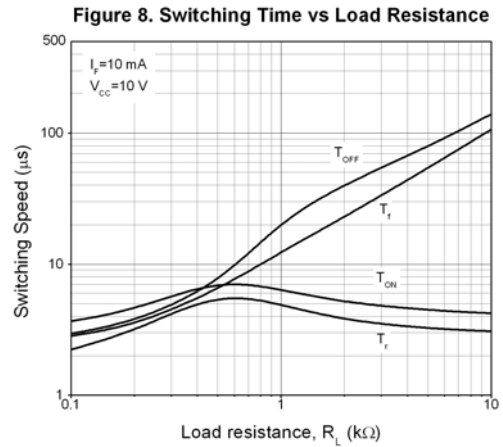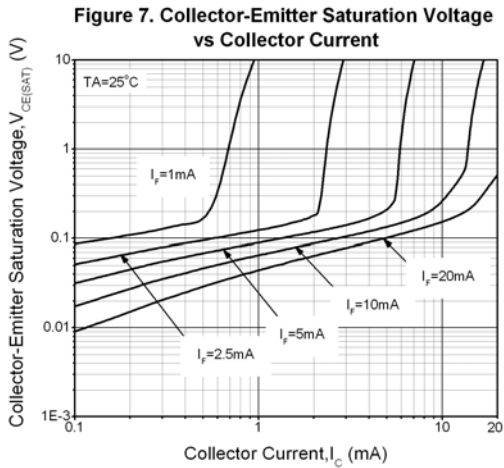

6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

TIL11X Series
MCT2X Series

Order Information

Part Number

TIL11XY(Z)-V
or
MCT2XY(Z)-V

Note

- X = Part no. for MCT2X series (E or none)
= Part no. for TIL11X series (1 or 7)
- Y = Lead form option (S, S1, M or none)
- Z = Tape and reel option (TA, TB or none).
- V = VDE optional


Option	Description	Packing quantity
None	Standard DIP-6	65 units per tube
M	Wide lead bend (0.4 inch spacing)	65 units per tube
S (TA)	Surface mount lead form + TA tape & reel option	1000 units per reel
S (TB)	Surface mount lead form + TB tape & reel option	1000 units per reel
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel

**6 PIN DIP PHOTOTRANSISTOR
PHOTOCOUPLER**


**TIL11X Series
MCT2X Series**

**Package Drawings
(Dimensions in mm)**

Standard DIP Type

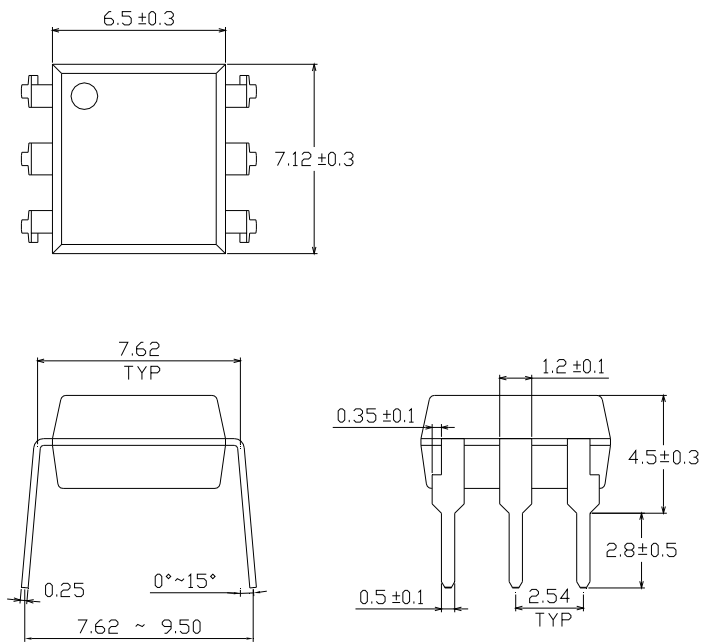


Option M Type

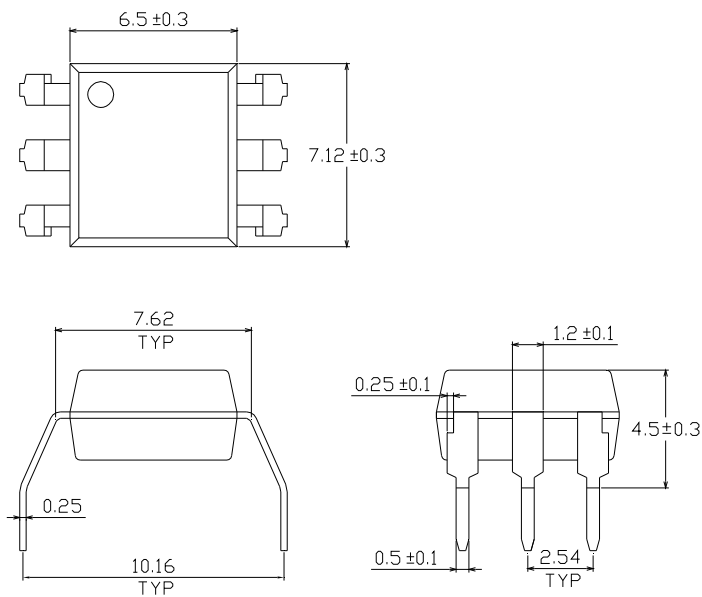


6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

**TIL11X Series
MCT2X Series**

Option S Type

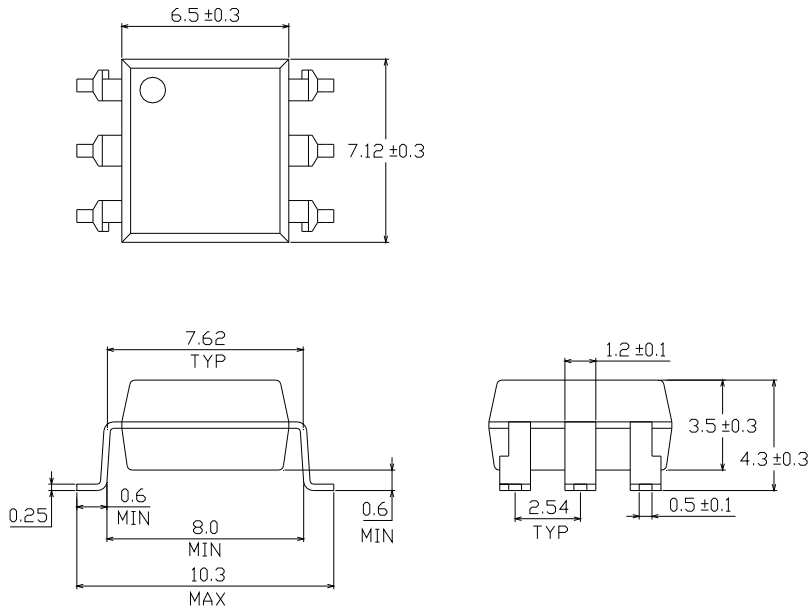


Option S1 Type

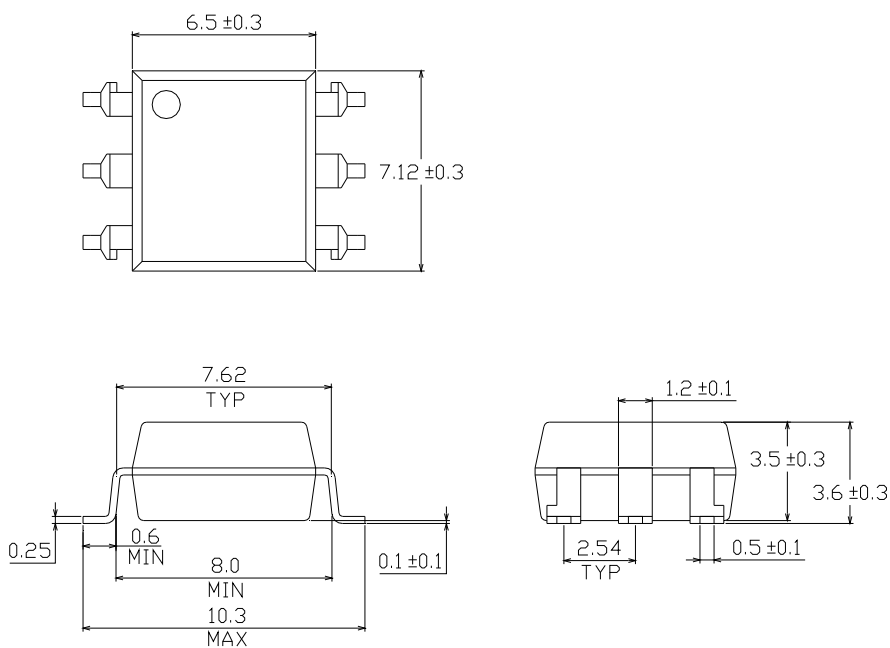


**6 PIN DIP PHOTOTRANSISTOR
PHOTOCOUPLER**

**TIL11X Series
MCT2X Series**

Recommended pad layout for surface mount leadform

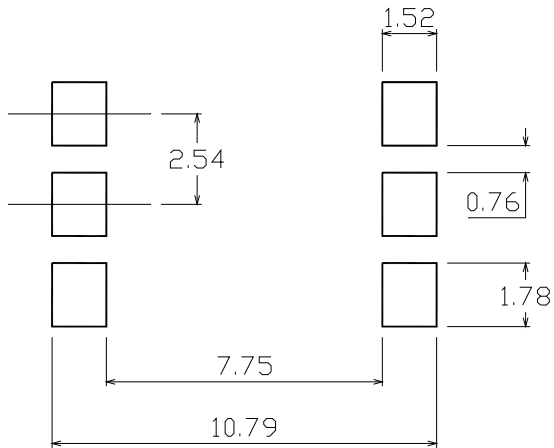

Device Marking

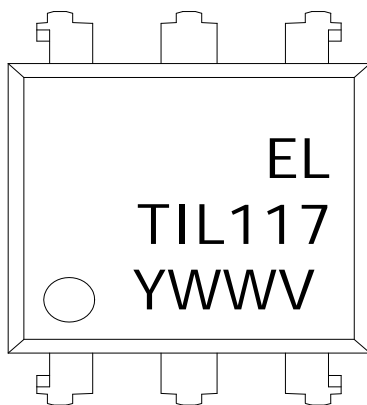

Notes


- EL denotes Everlight
- TIL117 denotes Device Number
- Y denotes 1 digit Year code
- WW denotes 2 digit Week code
- V denotes VDE optional

**6 PIN DIP PHOTOTRANSISTOR
PHOTOCOUPLER**

**TIL11X Series
MCT2X Series**


Tape & Reel Packing Specifications

Option TA

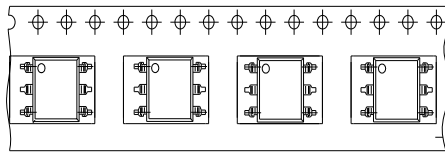


Direction of feed from reel

Option TB

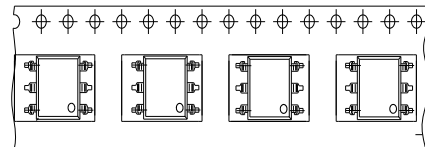

Direction of feed from reel

Tape dimensions

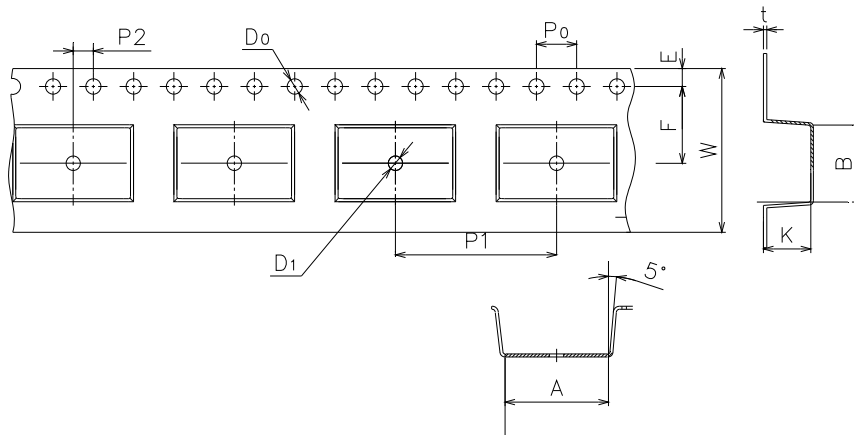


Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	10.4±0.1	7.52±0.1	1.5±0.1	1.5+0.1/-0	1.75±0.1	7.5±0.1

Dimension No.	Po	P1	P2	t	W	K
Dimension (mm)	4.0±0.15	16.0±0.1	2.0±0.1	0.35±0.03	16.0±0.2	4.5±0.1

**6 PIN DIP PHOTOTRANSISTOR
PHOTOCOUPLER**

**TIL11X Series
MCT2X Series**

Solder Reflow Temperature Profile

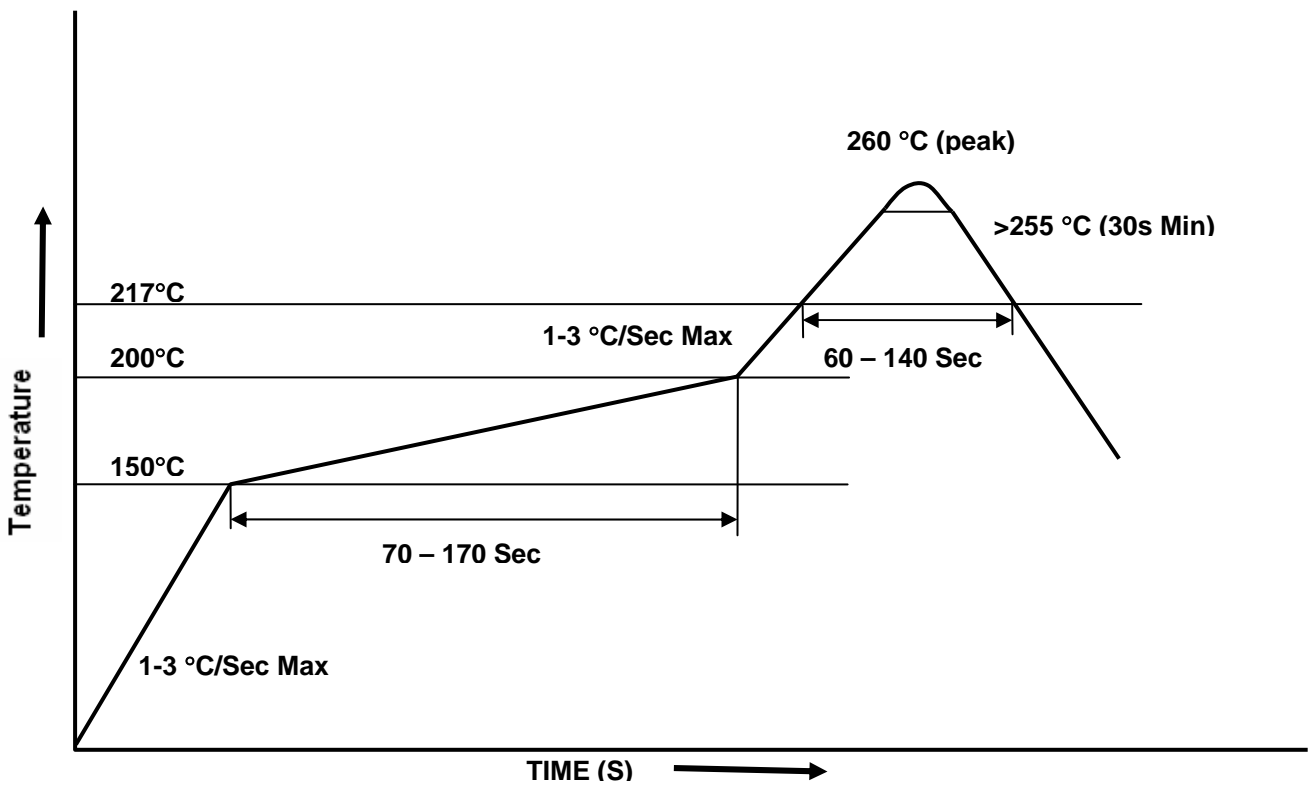



6 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

**TIL11X Series
MCT2X Series**

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.