

TRIAC(Through Hole)

TMG1CQ60

(T_j=150℃ / Sensitive Gate)


SanRex Triac **TMG1CQ60** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- I_{T(RMS)}=1A
- High Surge Current
- Lead-Free Package

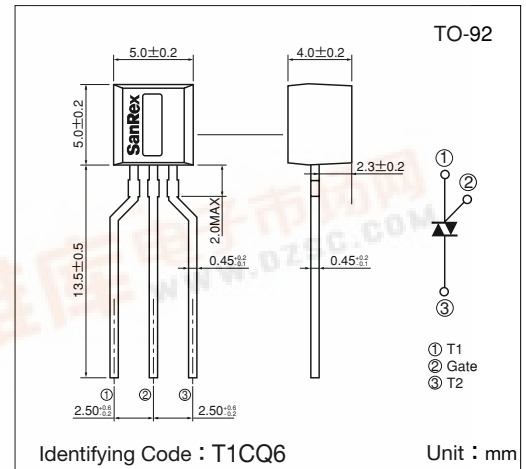

Maximum Ratings





(T_j=25℃ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =83℃	1	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	9.1/10	A
I ² t	I ² t (for fusing)		0.41	A ² S
P _{GM}	Peak Gate Power Dissipation		1	W
P _{G(AV)}	Average Gate Power Dissipation		0.1	W
I _{GM}	Peak Gate Current		0.5	A
V _{GM}	Peak Gate Voltage		6	V
T _j	Operating Junction Temperature		-40~+150	℃
T _{stg}	Storage Temperature		-40~+150	℃
	Mass		0.2	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_J=150^{\circ}\text{C}$			1	mA	
VTM	Peak On-State Voltage	$I_T=1.5\text{A}$, Inst. measurement			1.6	V	
I_{GT1}^{+}	1	$V_D=6\text{V}$, $R_L=10\Omega$			5	mA	
I_{GT1}^{-}	2				5		
I_{GT3}^{+}	3				10		
I_{GT3}^{-}	4				5		
V_{GT1}^{+}	1		Gate Trigger Voltage			1.8	V
V_{GT1}^{-}	2					1.8	
V_{GT3}^{+}	3					2.0	
V_{GT3}^{-}	4					1.8	
VGD	Non-Trigger Gate Voltage	$T_J=150^{\circ}\text{C}$, $V_D=\frac{1}{2}V_{DRM}$	0.1			V	
$[\text{dv}/\text{dt}]_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_J=150^{\circ}\text{C}$, $[\text{di}/\text{dt}]_c=-0.5\text{A}/\text{ms}$, $V_D=\frac{2}{3}V_{DRM}$	1			$\text{V}/\mu\text{s}$	
IH	Holding Current			4		mA	
Rth(j-c)	Thermal Resistance	Junction to case			50	$^{\circ}\text{C}/\text{W}$	


Trigger mode of the triac




Gate Characteristics

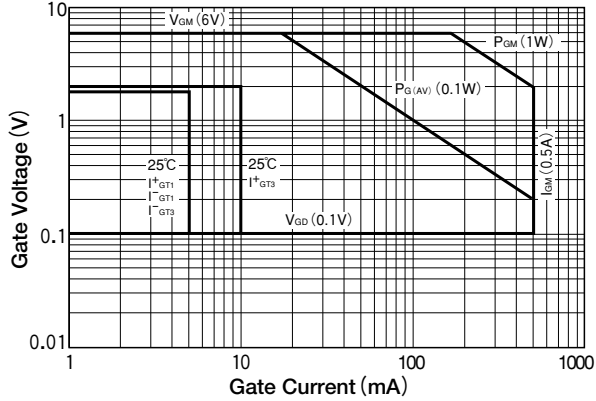


Maximum On-State Characteristics

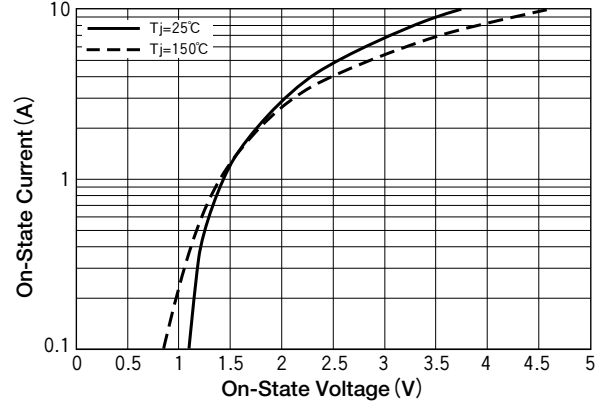


RMS On-State Current vs Maximum Power Dissipation

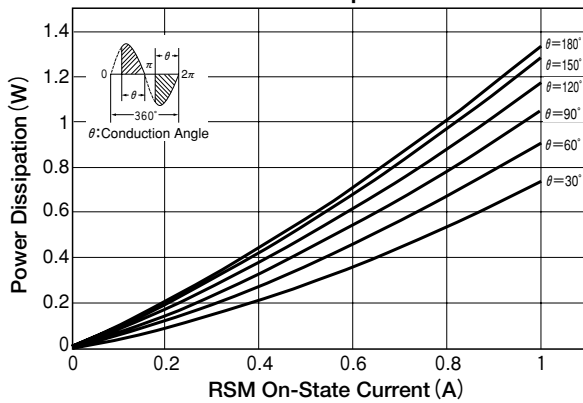


R.M.S On-State vs Allowable Case Temperature

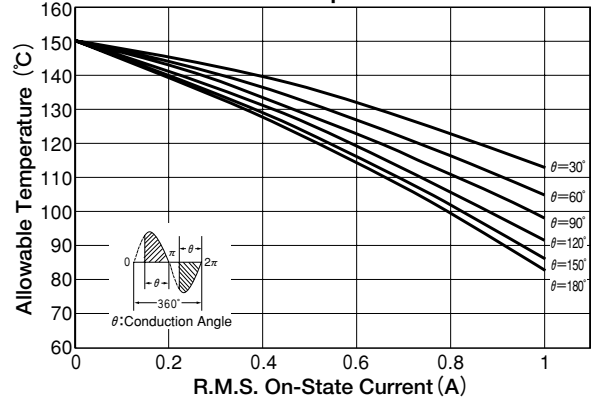


Surge On-State Current Rating (Non-Repetitive)

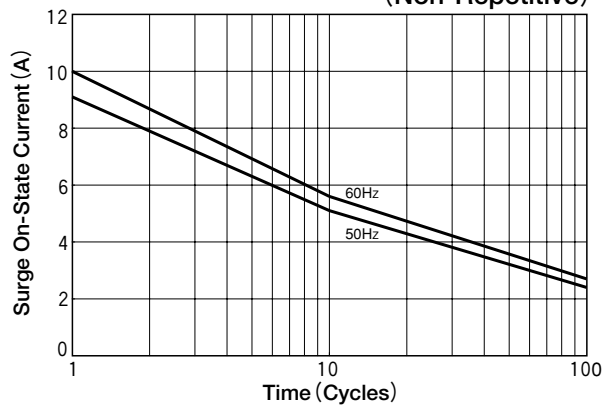

Transient Thermal Impedance

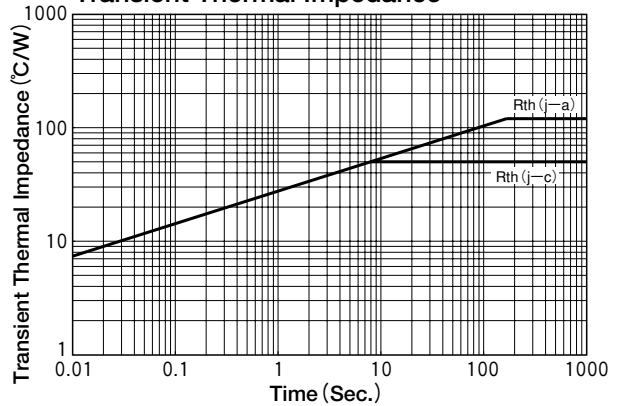

$I_{GT} - T_J$ Change Rate (Typical)

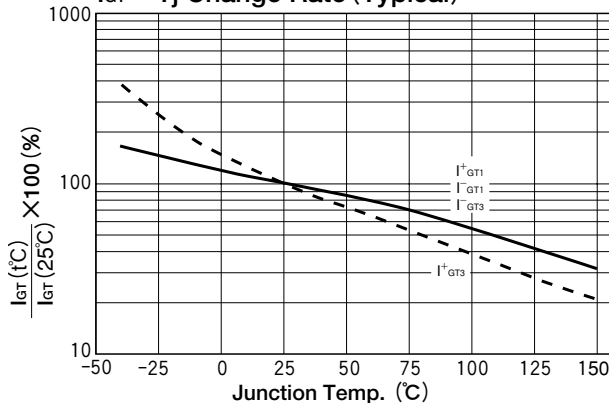

$V_{GT} - T_J$ (Typical)

