

TMT-13-6003


Temperature Compensated Amplifier 6 GHz - 13 GHz

This Amplifier offers exceptional performance over the band 6 GHz to 13 GHz with 18 dBm P1dB output power and 22 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

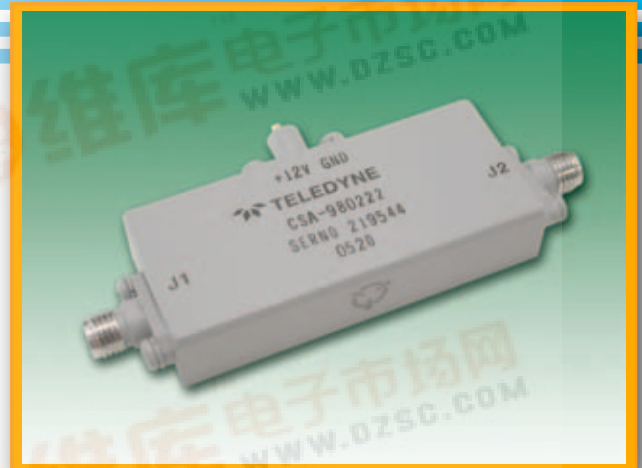

Specifications:

Model Number: TMT-13-6003
 Frequency Range: 6 GHz – 13 GHz
 Gain (min): 22 dB
 Gain Vs Temp at any Frequency: ± 1.00 dB
 Noise Figure (max): 4.5 dB
 Output Power @ 1dB Compression: 18 dBm
 Gain Flatness Vs Frequency: ± 1.0 dB
 3rd Order Intercept (Typ): 27 dBm
 Power Supply:
 Input Voltage: 11.5 to 15 VDC
 Current @ 12 VDC (typ): 200 mA
 Current @ 12 VDC (max): 230 mA
 Case Type (See attached Outline): SX4
 Temperature Range: -54 to +90C



**TELEDYNE
MICROWAVE**


ISO 9001:2000



TMT-13-6003

Temperature Compensated Amplifier

6 GHz - 13 GHz

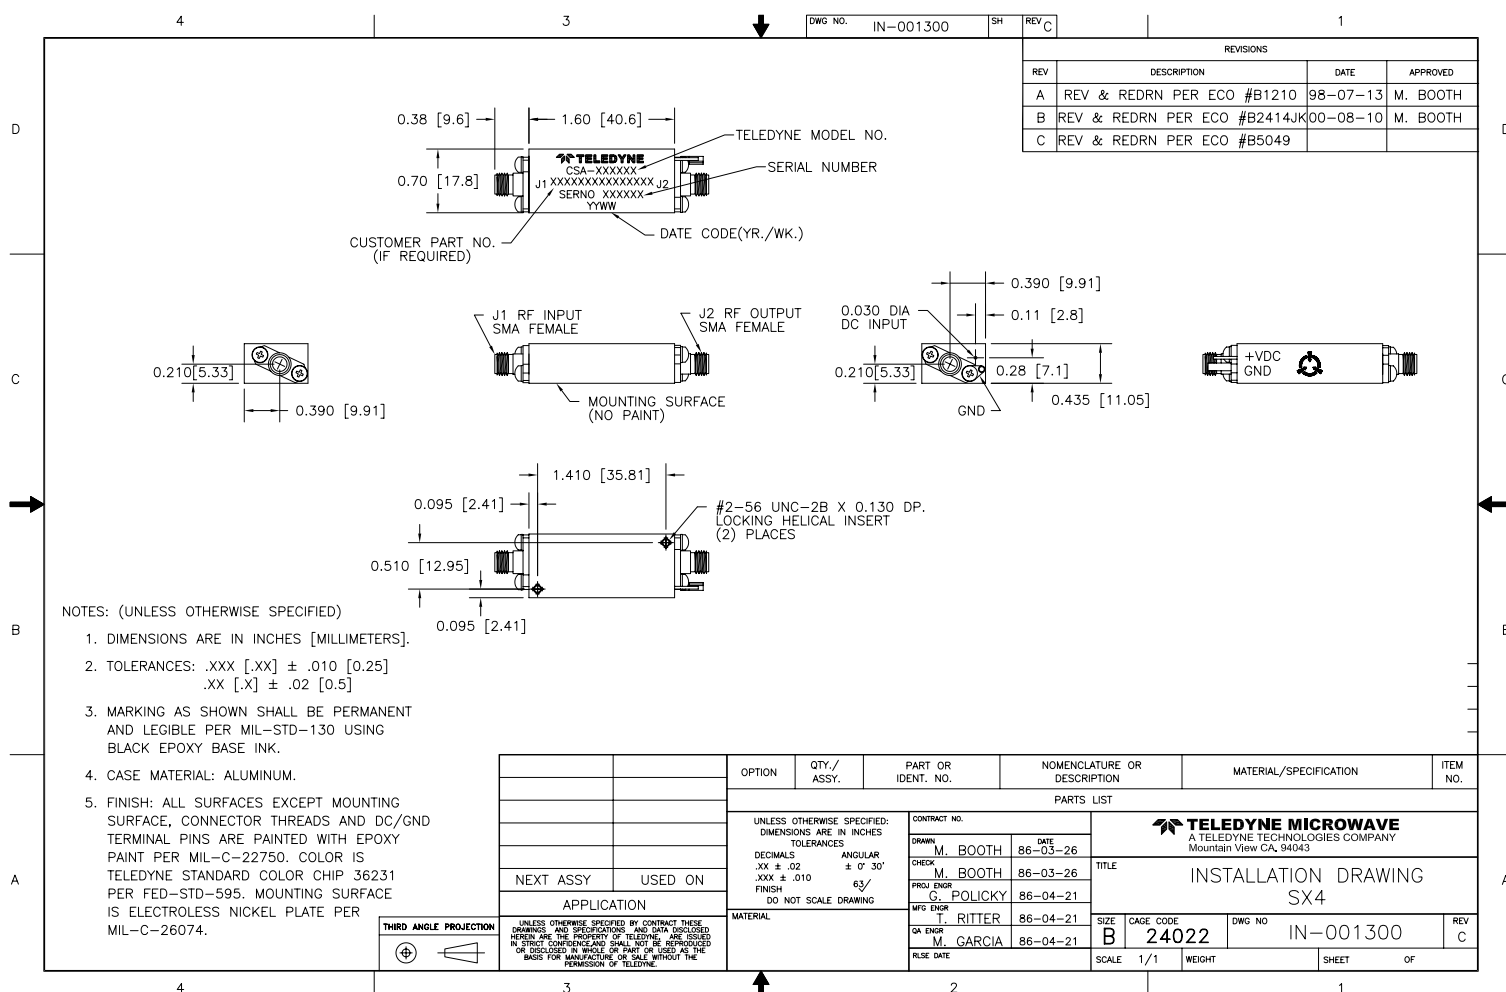

TELEDYNE
MICROWAVE

ISO 9001:2000