


Voice/Modem Line Transformers

V.29, V.32, V.34, V.90, & V.92 Applications

- Highest Density Package Available
- Approved to UL1950 3rd Edition
- Approved to UL60950 & EN60950
- Surface Mount
- Vacuum Encapsulated
- Pri:Sec Hi-Pot=1500Vrms and Higher
- Surge Voltage



Electrical Specification @ Ta=25°C

Part #	Impedance PRI:SEC (Ω)	DC Unbalance (mA)	Insertion Loss (dB MAX.)	Total Harmonic Distortion (dB Typ.)	Long. Balance (dB MIN.)	Return Loss @ 1KHz (dB Typ)
TTC-5023¹	600:600	0	2.0	-79	80	16
TTC-5024	600:330	0	3.0	-85	80	27
TTC-5025	600:430	0	3.5	-79	80	20
TTC-5032	600:470	0	2.5	-79	80	27
TTC-5035	600:346	0	3.0	-84	80	27
TTC-5036	600:287	0	4.0	-90	80	27
TTC-5037	600:560	0	2.0	-77	80	23

¹ 3000 Vrms Pri:Sec Hi-Pot

High Impedance Applications


Part #	Impedance PRI:SEC (Ω)	DC Unbalance (mA)	Inductance Lp @ 200Hz 10mVrms (H MIN)	Shunt Loss Rp @ 200Hz 10mVrms (Ω MIN)
TTC-5027	30k:30k	0	30.0	110
TTC-5033	10k:10k	0	6.5	22
TTC-5034	20k:20k	0	18.0	60

Package Information


QTY/Tray	Tape/Reel
50	400

Mechanical Dimensions mm (inches)

All dimensions are typical, please contact Tamura for tolerances and suggested layout information.



Schematics



TAMURA CORPORATION




Voice/Modem Line Transformers



V.29, V.32 & V.34 Applications

- Approved to UL1950 3rd Edition
- Approved to UL60950 & EN60950
- Hi-Pot 1500Vrms Pri:Sec

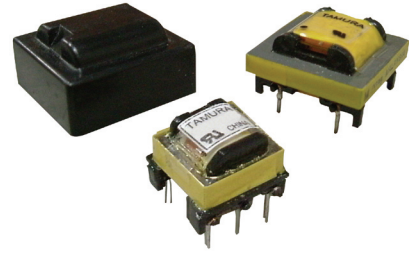




Electrical Specification @ Ta=25°C

Part #	Impedance PRI: SEC (Ω)	DC Unbalance (mA)	Insertion Loss (dB MAX)	Total Harmonic Distortion (dB Typ)	Long. Balance (dB MIN)	Return Loss @ 1 KHz (dB Typ)	Mounting	Package Fig.	Schematic Fig.
TTC-5019	600:260	50	4.0	-60	60	-	THD	B	1
TTC-5010 ¹	600:301	65	3.75	-50	60	-	THD (CASE)	A	2
TTC-5020	600:301	65	3.75	-50	60	-	THD	B	2
TTC-264M ¹	600:470	100	2.5	-50	60	-	THD (CASE)	A	1
TTC-5028	600:470	100	2.5	-50	60	-	THD	B	1




¹ 3000 Vrms Pri:Sec Hi-Pot

Mechanical Dimensions mm (inches)

All dimensions are typical, please contact Tamura for tolerances and suggested layout information.

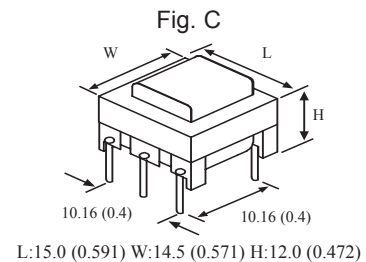

Schematics



TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com


USA

Japan

United Kingdom

Hong Kong

High Speed Modem Transformers

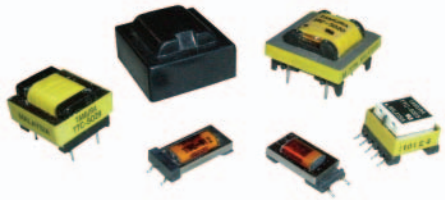

V.90, V.92 Applications

- Optimized for High Speed Modem Applications
- Frequency Range 300Hz to 4kHz
- 1500 Vrms Hi-Pot (Pri:Sec)
- Approved to UL1950 3rd Edition
- PCMCIA Packages
- Approved to UL60950 & EN60950






Electrical Specification @ Ta=25°C

Part #	Impedance PRI:SEC (Ω)	DC Unbalance (mA)	Insertion Loss (dB MAX.)	Total Harmonic Distortion (dB Typ.)	Long. Balance (dB MIN.)	Return Loss @ 1KHz (dB Typ)	Mounting	Package Fig.	Schematic Fig.
TTC-511	600:287	0	3.85	-82	60	35	SMD	A	1
TTC-5021	600:287	0	3.85	-82	60	33	SMD	F	1
TTC-5000	600:301	0	3.25	-92	60	26	THD	D	4
TTC-5001 ¹	600:301	0	3.25	-92	60	26	THD (CASE)	C	4
TTC-5013	600:301	65	4.00	-89	60	15	THD	D	4
TTC-5003	600:320	0	3.20	-92	60	29	SMD	I	6
TTC-5014	600:348	0	3.25	-88	60	30	THD	H	5
TTC-5006 ¹	600:374	0	2.5	-90	60	29	THD (CASE)	C	4
TTC-5008	600:374	0	2.5	-90	60	29	THD	D	4
TTC-5022	600:374	0	2.3	-89	60	30	THD	E	1
TTC-5004	600:392	0	2.2	-89	60	33	SMD	I	6
TTC-5015	600:442	0	2.0	-85	60	35	THD	H	5
TTC-5026	600:490	0	1.5	-80	60	28	SMD	I	3
TTC-512	600:510	0	1.50	-75	60	30	SMD	B	2
TTC-5005	600:525	0	1.6	-86	60	27	SMD	I	6
TTC-5007 ¹	600:530	0	1.0	-83	60	32	THD (CASE)	C	4
TTC-5009	600:530	0	1.0	-83	60	32	THD	D	4
TTC-5016	600:560	0	1.5	-82	60	23	THD	H	5
TTC-5012 ¹	600:600	0	1.0	-76	60	31	THD (CASE)	C	4
TTC-5017	600:600	0	1.5	-82	60	23	THD	H	4
TTC-5018	600:600	0	1.0	-76	60	31	THD	D	4
TTC-5029	600:600	0	1.0	-88	60	25	THD	G	5

¹ 3000 Vrms Pri:Sec Hi-Pot

Mechanical Dimensions mm (inches)

All dimensions are typical, please contact Tamura for tolerances and suggested layout information.




TAMURA CORPORATION


High Speed Modem Transformers

Mechanical Dimensions mm (inches)


All dimensions are typical, please contact Tamura for tolerances and suggested layout information.




L: 8.5 (0.35) W: 16.3 (0.64) H: 5.1 (0.20)



L: 17.0 (0.67) W: 17.0 (0.67) H: 12.0 (0.47)




L: 15.0 (0.59) W: 14.5 (0.57) H: 12.0 (0.47)




L: 13.5 (0.53) W: 14.0 (0.55) H: 10.4 (0.41)


Schematics




1




2




3



4



5



6