

TAITRON

components incorporated


8A Bridge Rectifiers

TU800 - TU810

8A Bridge Rectifiers

Features

- Low forward voltage drop
- High current capability, high reliability
- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:
260° C/10 seconds, 1.375" (9.5mm) lead length at 5 lbs.(2.3kg) tension
- This series is UL recognized under component index, File number E194718
- RoHS compliant



TU



Mechanical Data

Case:	Molded plastic
Terminals:	Plated leads solderable per MIL-STD-202E, Method 208C
Polarity:	As marked on body
Mounting Torque:	8.8 in. – lbs. max.
Weight:	0.3 ounces, 8.0 grams

Maximum Ratings And Electrical Characteristics (T_{amb}=25°C)

Symbols	Parameter	TU 800	TU 801	TU 802	TU 804	TU 806	TU 808	TU 810	Unit	Conditions
VRRM	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
IF(AV)	Maximum Average Forward Rectified Current (Note 1)	8.0							A	TC=100°C
IFSM	Peak Forward Surge Current	300							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
VF	Maximum Instantaneous Forward Voltage Drop per leg	1.0							V	IF=8.0A
IR	Maximum DC Reverse Current at Rated DC Blocking Voltage per leg	5.0							μA	TA=25°C
		1.0							mA	TA=100°C

8A Bridge Rectifiers

TU800 - TU810

Symbols	Parameter	TU 800	TU 801	TU 802	TU 804	TU 806	TU 808	TU 810	Unit	Conditions
I^2_t	Rating for Fusing (1ms<t<8.3ms)	373							A ² S	
C_J	Typical Junction Capacitance	200							pF	VR=4V, f=1MHz
$R_{\theta JA}$	Typical Thermal Resistance per leg	18							°C/W	(Note 2)
$R_{\theta JC}$	Typical Thermal Resistance per leg	5.0							°C/W	(Note 1)
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150							°C	

Note:

- Unit mounted on 3.0" x 3.0" x 0.11" thick (7.5 x 7.5 x 0.3cm) Al. plate.
- Unit mounted in free air, no heatsink, P.C.B at 0.375" (9.5mm) lead length with 0.5" x 0.5" (12 x 12mm) copper pads
- Single Phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Rating and characteristic curves

Fig.1- Derating Curve Output Rectified Current


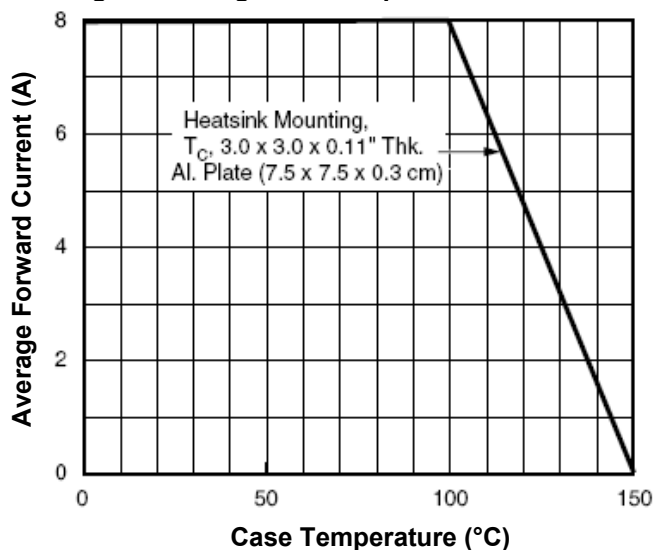


Fig.2-Max Non-Repetitive Peak Forward Surge Current per leg

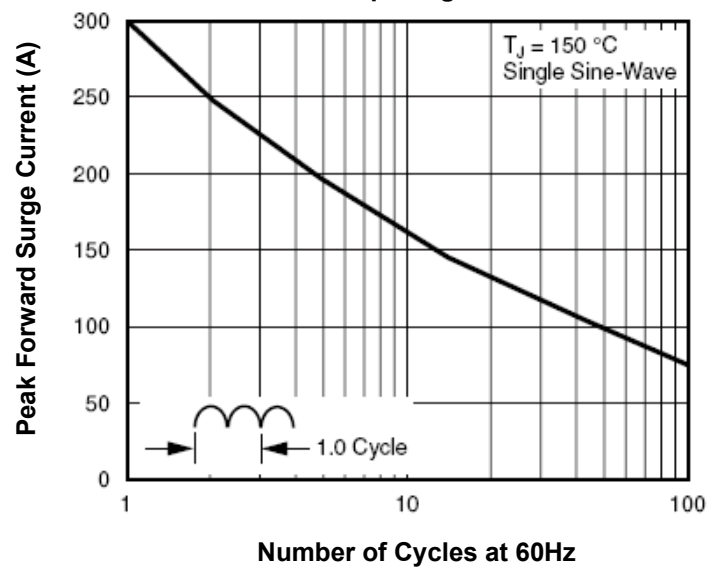

8A Bridge Rectifiers

TU800 - TU810

Fig.3- Typical Instantaneous Forward Characteristics, per leg

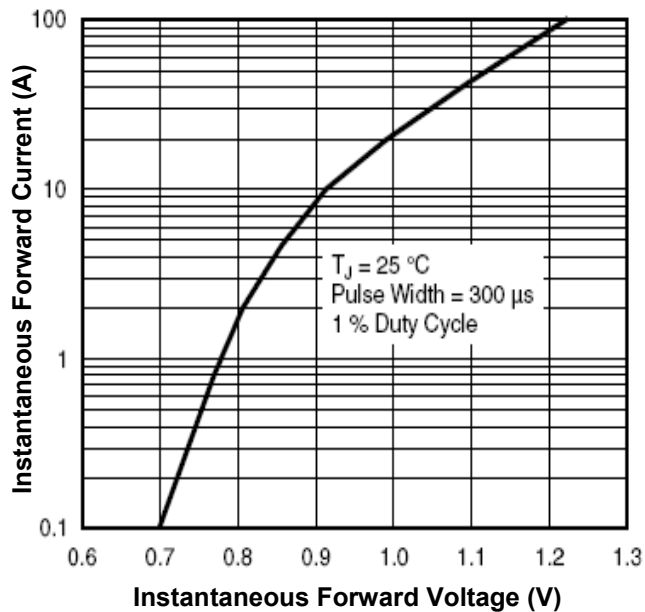


Fig.4-Typical Reverse Leakage Characteristics per leg


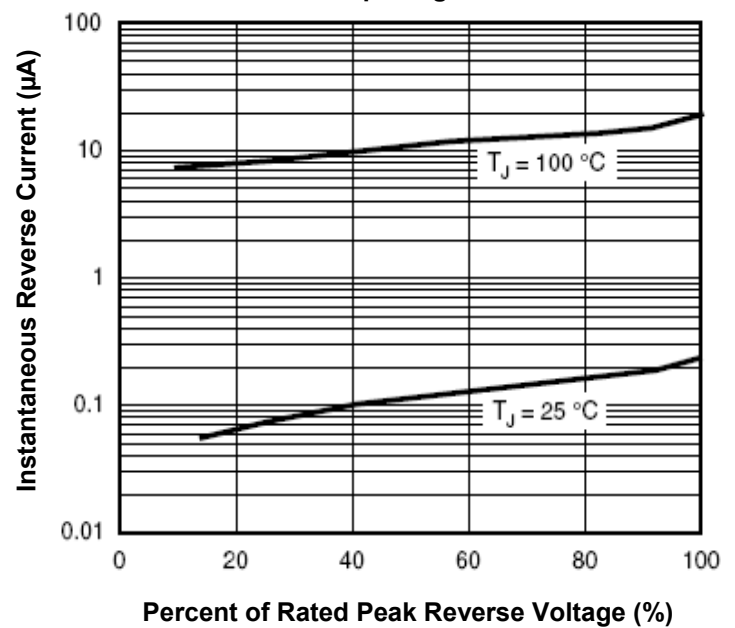



Fig.5-Typical Junction Capacitance per leg

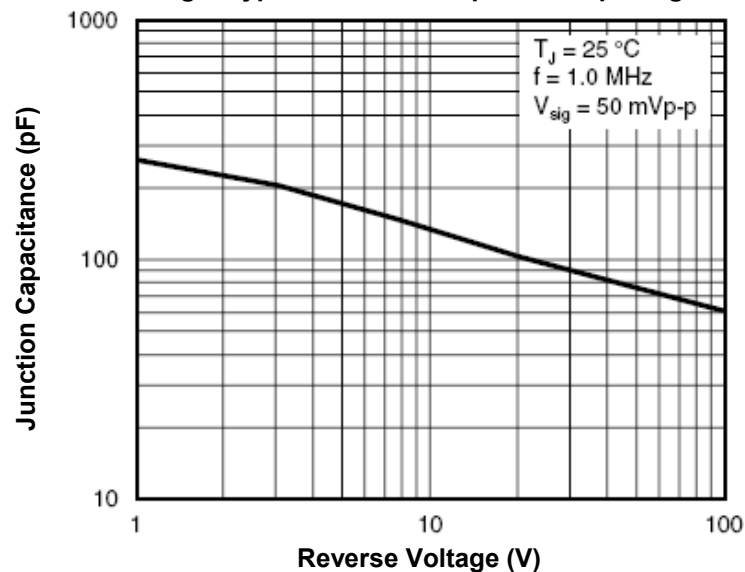

8A Bridge Rectifiers

TU800 - TU810

Dimensions in inch (mm)

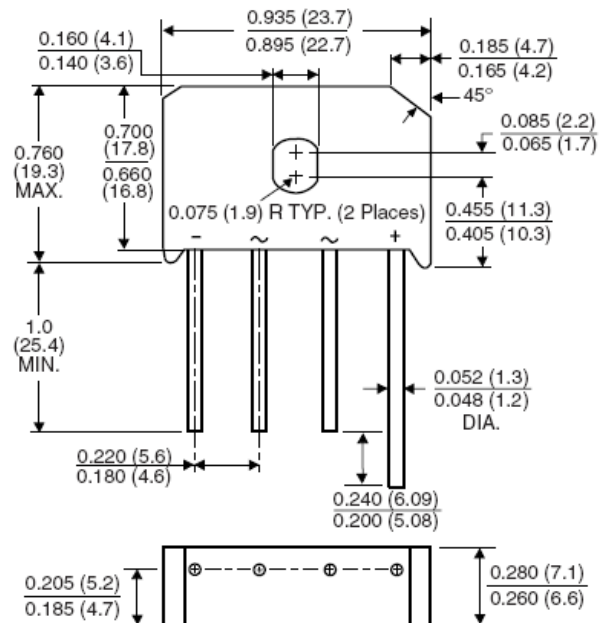

TU

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A. DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931

TAITRON
components incorporated

Rev. B/AH 2007-09-18