

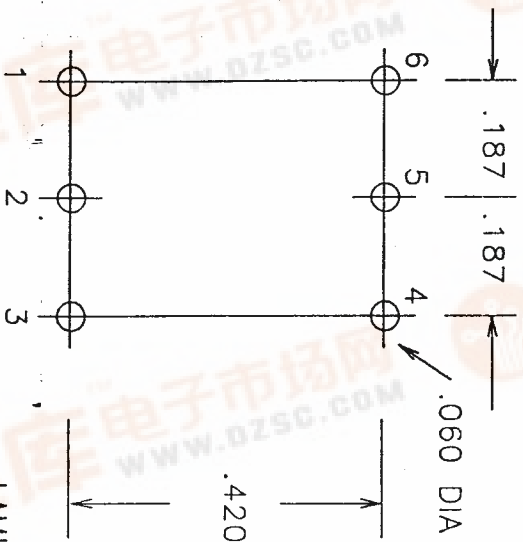
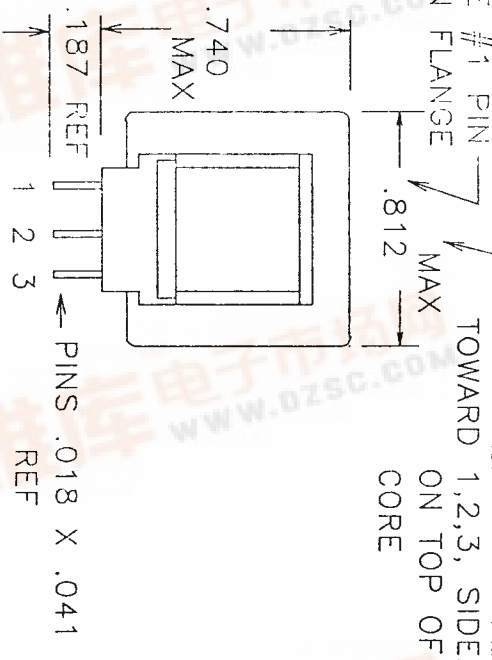


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
TY-142P.DC2

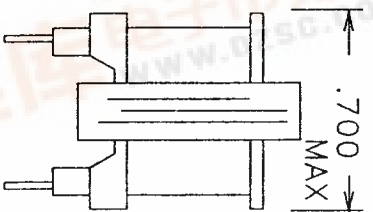

LAMINATION NOTES

METHOD 1 X 1

MARKING "TY-142P" ON TOP OF CORE
DATE & SITE CODE ON SIDE OF CORE

PRODUCTION TESTS

URNS RATIO = 100%

DC 1-3 = 750 NOM

RESISTANCE 4-6 = 217 NOM

IN OHMS

APPLY = 5V, 200 HZ, 1-3

INDUCTANCE: 19 HY, MINIMUM

HIPOT = 1500V PRI TO SEC & CORE

1500V SEC TO CORE

CONTINUITY = 100%

IMPREGNATION NOTES = PREHEAT 2 HRS

PINS TO BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

PART NO. TY-142P

