



**DC COMPONENTS CO., LTD.**  
RECTIFIER SPECIALISTS

UF3A  
THRU  
UF3K

**TECHNICAL SPECIFICATIONS OF SURFACE MOUNT ULTRA FAST RECTIFIER**

VOLTAGE RANGE - 50 to 800 Volts

CURRENT - 3.0 Amperes

**FEATURES**



- \* Ideal for surface mounted applications
- \* Low leakage current
- \* Glass passivated junction

**MECHANICAL DATA**

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- \* Polarity: As marked
- \* Mounting position: Any
- \* Weight: 0.24 gram



SMC (DO-214AB)

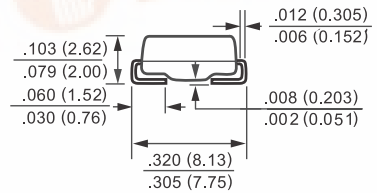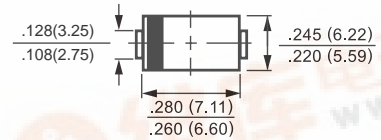

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

|  | SYMBOL                            | UF3A         | UF3B | UF3D | UF3G | UF3J | UF3K | UNITS |
|--|-----------------------------------|--------------|------|------|------|------|------|-------|
| Maximum Recurrent Peak Reverse Voltage   | V <sub>RRM</sub>                  | 50           | 100  | 200  | 400  | 600  | 800  | Volts |
| Maximum RMS Voltage  | V <sub>RRMS</sub>                 | 35           | 70   | 140  | 280  | 420  | 560  | Volts |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>                   | 50           | 100  | 200  | 400  | 600  | 800  | Volts |
| Maximum Average Forward Rectified Current T <sub>A</sub> = 75°C  | I <sub>O</sub>                    | 3.0          |      |      |      |      |      | Amps  |
| Peak Forward Surge Current I <sub>FM</sub> (surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                  | 100          |      |      |      |      |      | Amps  |
| Maximum Forward Voltage at 3.0A DC   | V <sub>F</sub>                    | 1.0          |      | 1.4  |      | 1.7  |      | Volts |
| Maximum DC Reverse Current at Rated DC Blocking Voltage  | I <sub>R</sub>                    | 10           |      |      |      |      |      | uAmps |
|  |                                   | 300          |      |      |      |      |      |       |
| Maximum Reverse Recovery Time (Note 3)   | t <sub>rr</sub>                   | 50           |      |      |      |      |      | nSec  |
| Typical Thermal Resistance (Note 2)  | R <sub>θJL</sub>                  | 10           |      |      |      |      |      | °C/W  |
| Typical Junction Capacitance (Note 1)  | C <sub>J</sub>                    | 60           |      |      |      |      |      | pF    |
| Operating and Storage Temperature Range  | T <sub>J</sub> , T <sub>STG</sub> | -65 to + 175 |      |      |      |      |      | °C    |

NOTES: 1. Measured at 1.0 MHz and applied average voltage of 4.0VDC  
 2. Thermal Resistance (Junction to Ambient), 0.2x0.2in<sup>2</sup> (5X5mm<sup>2</sup>)copper pads to each terminal.  
 3. Test Conditions, I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A.



## RATING AND CHARACTERISTIC CURVES ( UF3A THRU UF3K )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

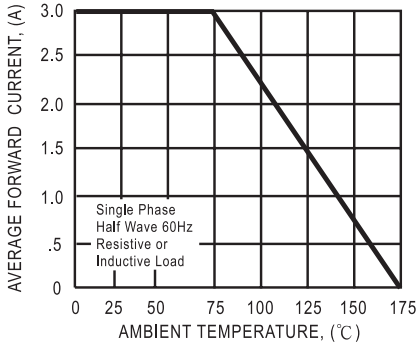


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

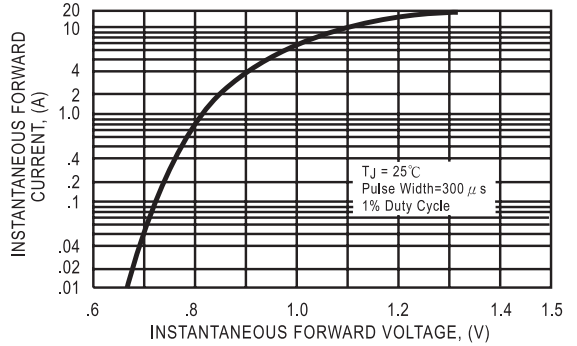


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

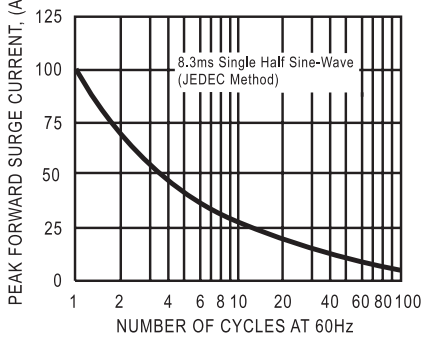


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

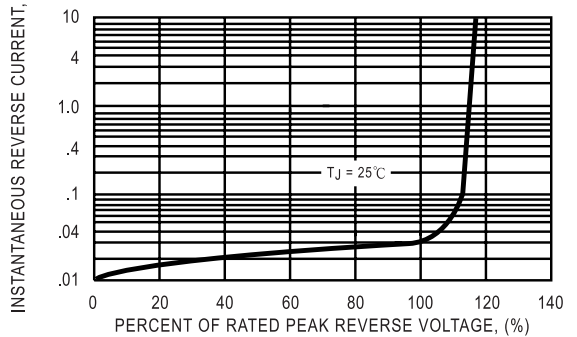


FIG. 6 - TYPICAL JUNCTION CAPACITANCE


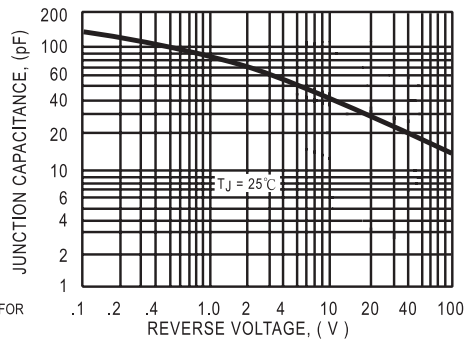


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1 Rise Time = 7ns max. Input Impedance = 1 megohm, 22 pF.  
2. Rise Time = 10ns max. Source Impedance = 50 ohms.

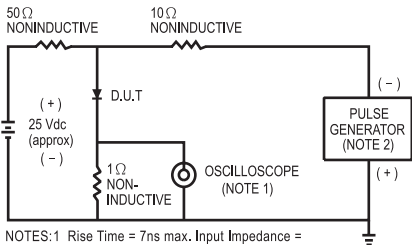