

[查询UPD7001供应商](#)

DATA SHEET [捷多帮专业PCB打样工厂，24小时加急出货](#)



MOS INTEGRATED CIRCUIT μ PD7001

8-BIT CMOS SERIAL I/O ANALOG-TO-DIGITAL CONVERTER

The μ PD7001 is a high performance, low power 8-bit CMOS A/D converter which consists of a 4-channel analog multiplexer and a digital interface circuit for serial data I/O. It uses successive approximation as a conversion technique. An A/D conversion system can be easily designed with the μ PD7001 including all circuits for A/D conversion. The μ PD7001 can be directly connected to 8-bit or 4-bit microprocessors.

FEATURES


- Single chip A/D converter
- Resolution: 8-bit
- 4-channel analog multiplexer
- Auto-zeroscale and auto-fullscale corrections without any external components
- Serial data transmission
- High input impedance: 1 000 M Ω
- Single +5 V power supply
- Low power operation
- Available in 16-pin plastic DIP
- Conversion speed: 140 μ s TYP.
- Linearity: 0.8 %

ORDERING INFORMATION

Ordering Code	Package
μ PD7001C	16-pin plastic DIP (300 mil)

BLOCK DIAGRAM

CONNECTION DIAGRAM (Top View)

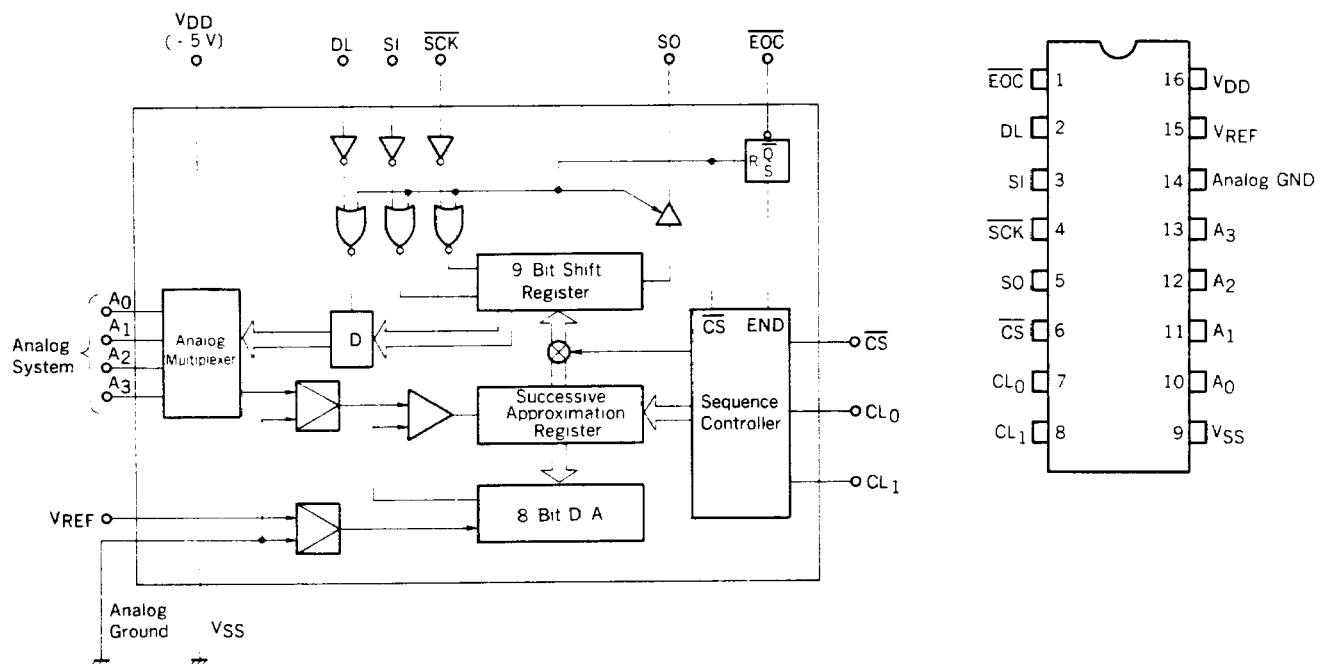

PIN IDENTIFICATION

PIN		SYMBOL	FUNCTION
NO.	NAME		
1	End of Conversion	EOC	High impedance when CS = Low. Open drain output.
2	Data Latch	DL	MPX addresses are latched at the falling edge of DL input.
3	Serial Input	SI	Pin to accept MPX address data. Data read at the rising edge of SCK input.
4	Serial Clock	SCK	SCK controls the shift operation of I/O interface 8-bit shift register. Input.
5	Serial Output	SO	Conversion data in shift register are output at the falling edge of SCK. High impedance when CS = High. Open drain output.
6	Chip Select	CS	CS = High: A/D conversion mode CS = Low: Interface mode. Input
7	Clock	CL0	Pin for clock oscillation.
8	Clock	CL1	Pin for clock oscillation.
9	Digital Ground	VSS	Ground terminal. Tie to GND with analog GND externally.
10 - 13	Analog Inputs	A0 to A3	Analog input terminals.
14	Analog GND	GND	Ground terminal for analog inputs and references.
15	Reference Input	VREF	Pin to set full scale voltage. VREF to +2.5 V.
16	Power Supply	VDD	VDD (+5 V)

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage	V_{DD}	-0.3 to +7.0	V
Power Dissipation	P_T	200	mW
Analog Input Voltage	V_{IA}	-0.3 to $V_{DD} + 0.3$	V
Reference Voltage	V_{REF}	-0.3 to $V_{DD} + 0.3$	V
Digital Input Voltage	V_{ID}	-0.3 to +12	V
Maximum Pull-up Voltage	V_{DD2}	+12	V
Operating Temperature	T_{opt}	0 to +70	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +125	$^\circ\text{C}$







DC CHARACTERISTICS





($T_a = +25^\circ\text{C} \pm 2^\circ\text{C}$; $f_{CK} = 400\text{ kHz}$, $V_{DD} = \pm 5\text{ V}, \pm 0.25\text{ V}$, $V_{REF} = 2.500\text{ V}$, Note 1)

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITION
		MIN.	TYP.	MAX.		
Resolution				8	Bit	
Nonlinearity	NL			0.8	%FSR	
Full-Scale Error			1	2	LSB	
Full-Scale Error Temperature Coefficient			30		ppm/ $^\circ\text{C}$	
Zero Error				2	LSB	
Zero Error Temperature Coefficient			30		ppm/ $^\circ\text{C}$	
Total Unadjusted Error 1	TUE1			2	LSB	Note 4
Total Unadjusted Error 2	TUE2			2	LSB	Note 5
Analog Input Voltage	V_{IA}	0	V_{REF}	V	Note 1	
Analog Input Resistance	R_I		1000		$\text{M}\Omega$	$V_I = 0 \text{ to } V_{DD}$
Conversion Time	t_{CONV}		140		μs	Note 2
Clock Frequency Range	f_{CK}	0.01	0.4	0.5	MHz	
Clock Frequency Distribution	Δf_{CK}		± 5	± 20	%	$R = 27\text{ k}\Omega, C = 47\text{ pF}, f_{CK} \approx 400\text{ kHz}$
Serial Clock Frequency	f_{SCK}		0.5		MHz	Note 3
High Level Voltage	V_{IH}	3.6			V	
Low Level Voltage	V_{IL}			1.4	V	
Digital Input Leakage Current	I_{ID}		1.0	10	μA	$V_I = V_{SS} \text{ to } +10\text{ V}$
Low Level Output Voltage	V_{OL}			0.4	V	$I_{DL} = 1.7\text{ mA}$
Output Leakage Current	I_{LEAK}		1.0	10	μA	$V_O = +10\text{ V}$
Power Dissipation	P_d		5	15	mW	

- Notes:
- All digital outputs are put at a high level when $V_I > V_{REF}$.
 - A/D conversion is started with \overline{CS} going high; at the final step of the first A/D conversion, \overline{EOC} is low. The conversion time is:
 $t_{CONV} = 56/f_{CK}$
 - For $f_{SCK} < 500\text{ kHz}$, the load capacitor (stray capacitance included) and the pull-up resistor, which are connected to serial output, are required to be not more than 30 pF and $3\text{ k}\Omega$ respectively.
 - $V_{DD} = 5.00\text{ V}$, $V_{REF} = 2.5 \pm 0.25\text{ V}$
 - $V_{DD} = 4.5$ to 5.5 V , $V_{REF} = 2.500\text{ V}$

OPERATING CHARACTERISTICS

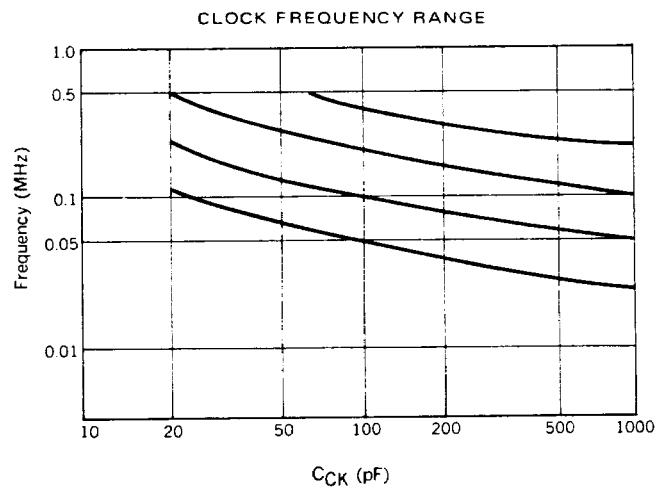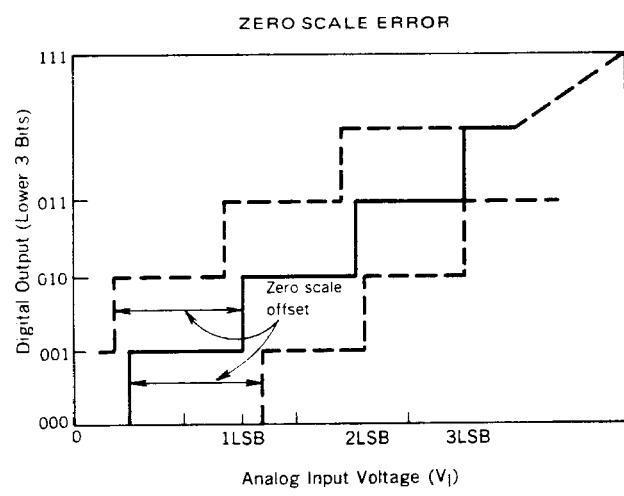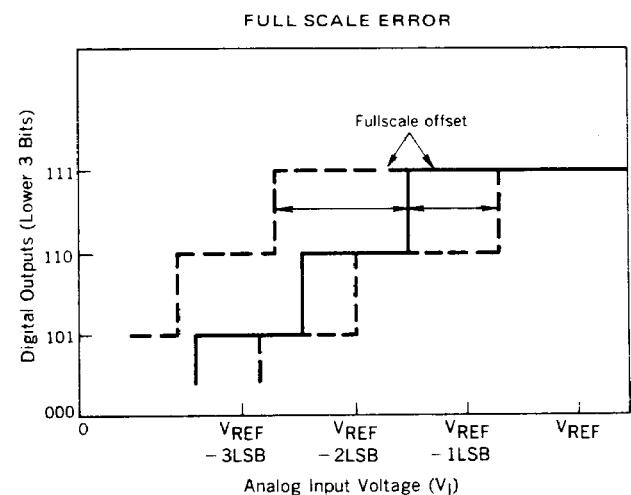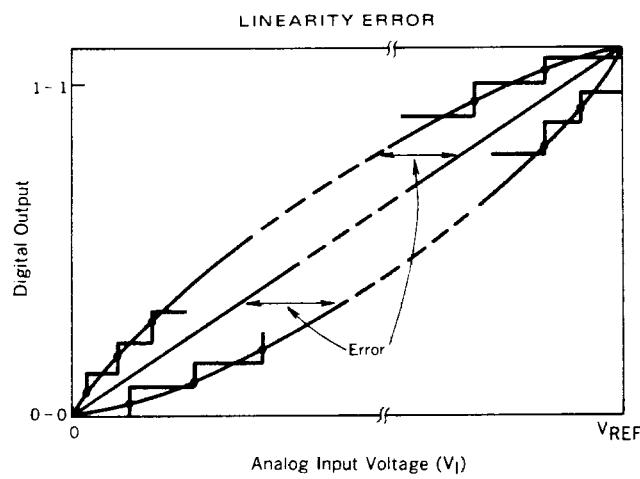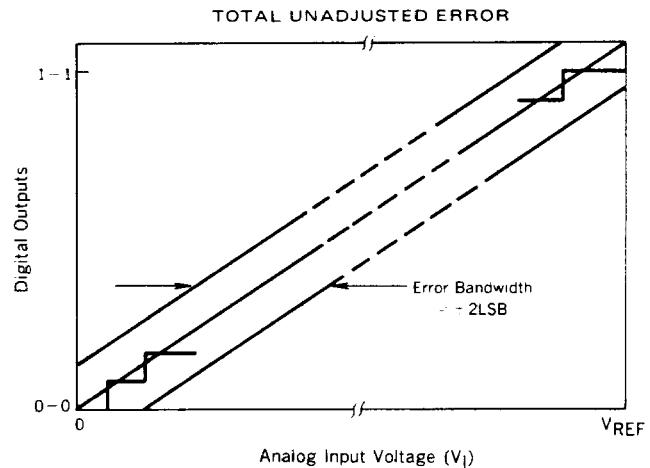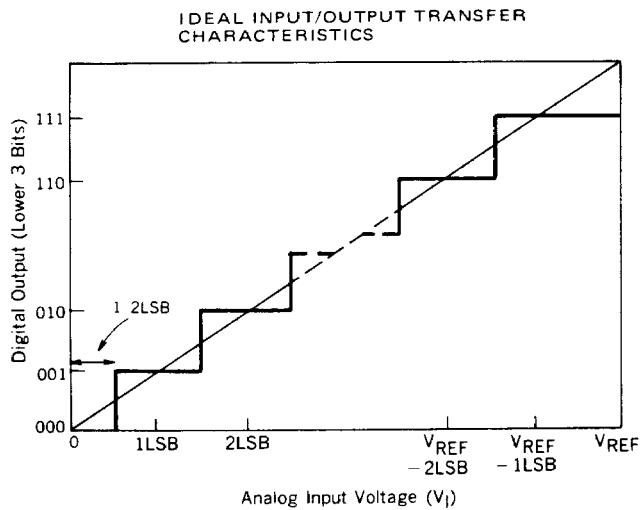

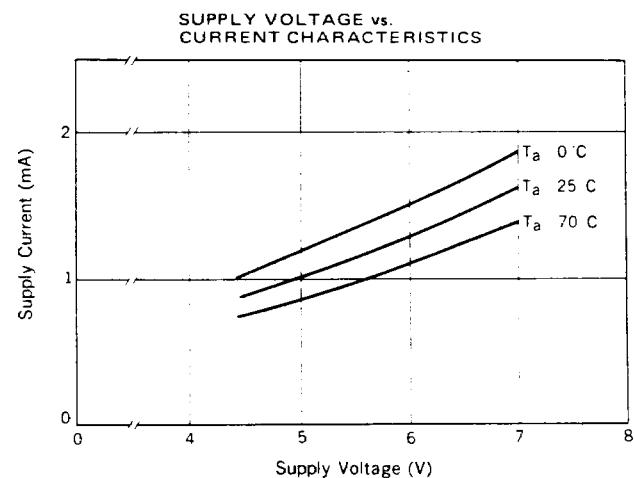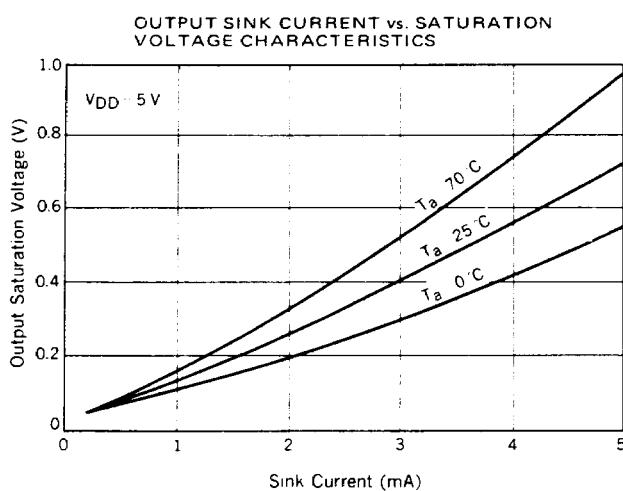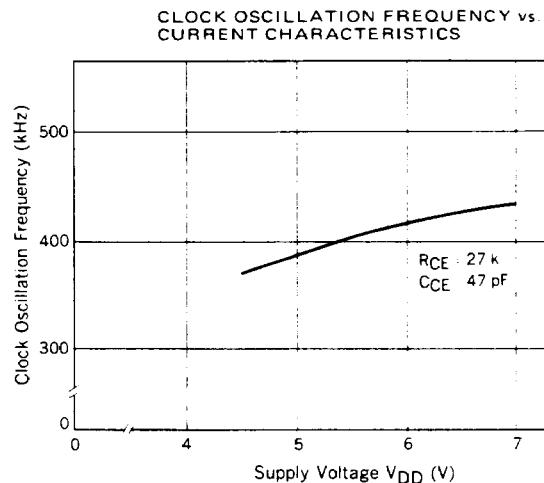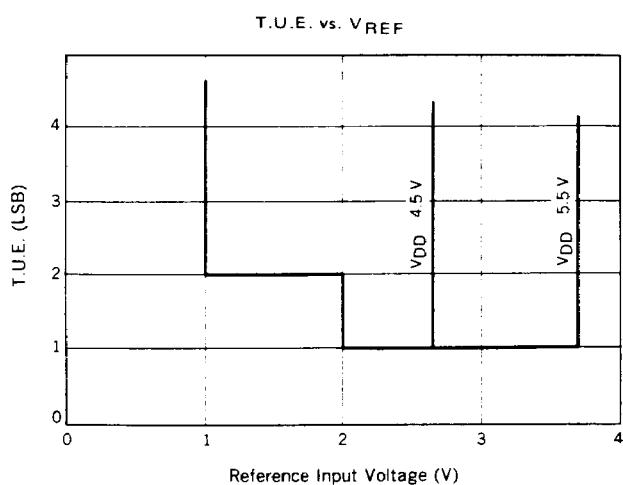
OPERATING CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

AC CHARACTERISTICS(T_a = +25 °C ± 2 °C; f_{CK} = 400 kHz, V_{DD} = ±5 V, Note 1)

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITION
		MIN.	TYP.	MAX.		
EOC Hold Time	t _{HECS}	0			μs	EOC to CS
CS Setup Time	t _{SCSK}	12.5			μs	CS to SCK Note 1
Address Data Setup Time	t _{SIK}	150			ns	
Address Data Hold Time	t _{HKI}	100			ns	
High Level Serial Clock Pulse Width	t _{WHK}	400			ns	
Low Level Serial Clock Pulse Width	t _{WLK}	400			ns	
Data Latch Hold Time	t _{HKDL}	200			ns	SCK to DL
Data Latch Pulse Width	t _{WHDL}	200			ns	
Serial Data Delay Time	t _{DKO}			500	ns	SCK to SO, R _L = 3 kΩ (Note 2), C _L = 30 pF
Delay Time to Floating SO	t _{FCSO}			250	ns	CS to High Impedance SO
CS Hold Time	t _{HKCS}	200			ns	

Notes: 1. When CS is high, the μ PD7001 performs A/D conversion and does not accept any external digital signal. It remains at the previous state continuously. When CS is low, the data is exchanged with the external digital circuits. However, 5 internal clock pulses are needed before digital data is output. The rating corresponds to the 5 clock signal pulses: t_{SCSK}(min) = 5/f_{CK}

2. The serial data delay time depends on load capacitance and pull-up resistance: t_{DKO} t = 2.3 × R_L × C_L + 100 ns.

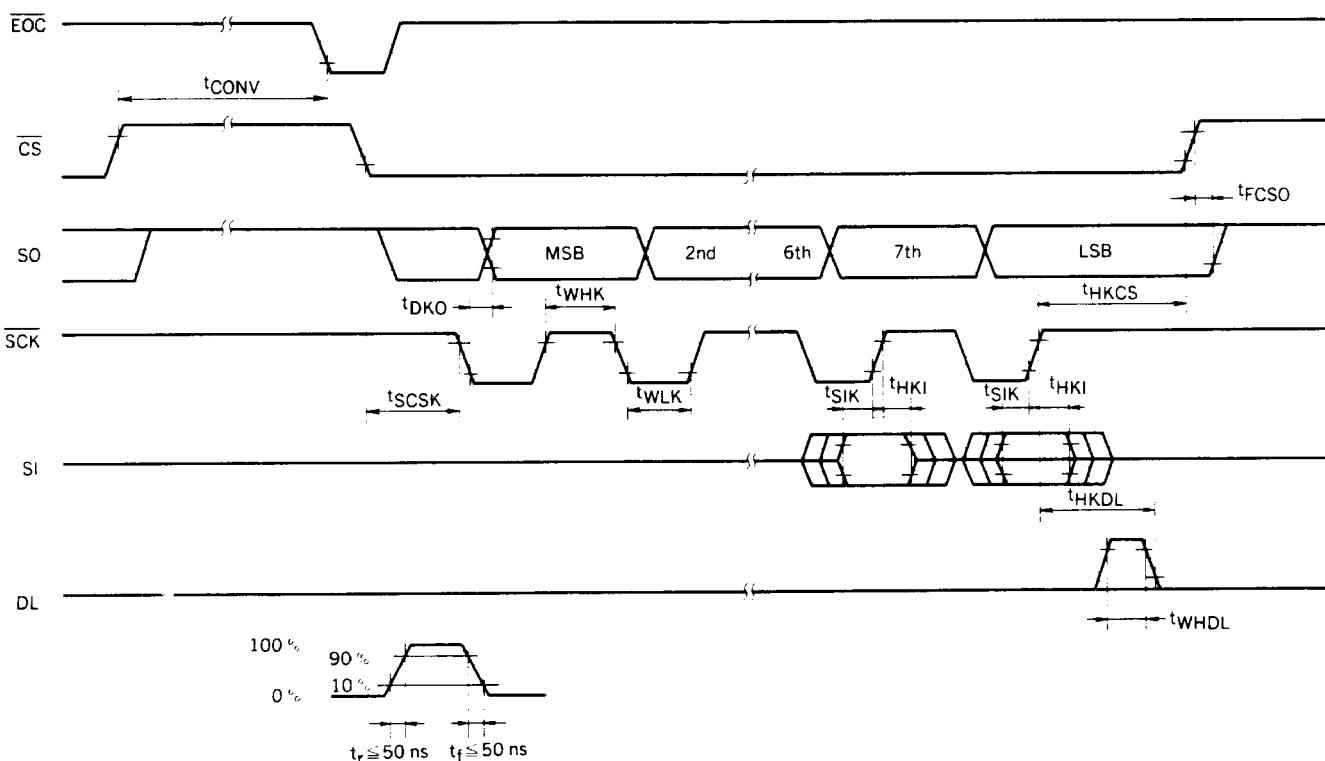TIMING CHART

OPERATIONS OF INTERNAL CIRCUIT BLOCKS

Sequence Controller

When \overline{CS} is high, the sequence controller controls the internal A/D conversion sequence of the μ PD7001. One A/D conversion takes 56 internal clock pulses to complete. As the final step, the conversion data is transferred to the shift register, and \overline{EOC} goes low. After this A/D conversion sequence is completed, the sequence controller is initialized to execute the next conversion. Thus, conversion data in the shift register is refreshed every 56 clock pulses.

Shift Register

A 9-bit shift register is incorporated in the μ PD7001 for serial data exchange with peripheral devices. The serial input, output, and clock terminal of the shift register are strobed by the internal chip selects signal and are connected to SI, SO and \overline{SCK} pins respectively. A low level of \overline{CS} enables the interface with external peripheral devices. The shift register outputs data at the falling edge of \overline{SCK} and accepts data at its rising edge. In addition, for analog multiplexer address setting, the two input bits of the shift register are connected to the address decoder, and the address data is latched at the falling edge of DL.

Analog Multiplexer


One analog input signal from A_0 – A_3 is selected through the addressed multiplexer channel, and this input signal is transferred to the input of the A/D converter.

A/D Converter


The A/D converter section contains the successive approximation register, the 8-bit D/A converter, comparator and buffer amplifier. Voltage at the V_{REF} pin is used as a reference for the A/D conversion.

A/D conversion is executed automatically by the internal sequence controller. Because the μ PD7001 uses the successive approximation technique, change in analog input voltage during the conversion causes a conversion error. Therefore, a low pass filter, and sample and hold circuit should be connected at the input to stabilize the conversion.


1. Data held in the internal sequence controller and address latch just after power-on is random. Therefore, an MPX address setting and a sequence controller resetting are required before a first conversion data reading.
2. When using long wires to connect external components and μ PD7001 terminals, noise induction and some interference must be expected and taken into account.
3. The μ PD7001 uses the successive approximation technique for A/D conversion; therefore, a sample and hold circuit is required when a fast varying analog input signal is applied. In addition, a C-R filter as shown below should be used, in order to minimize noise in a DC analog input signal.

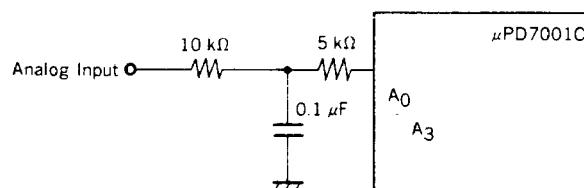

EXAMPLE OF THE APPLICATION CIRCUIT

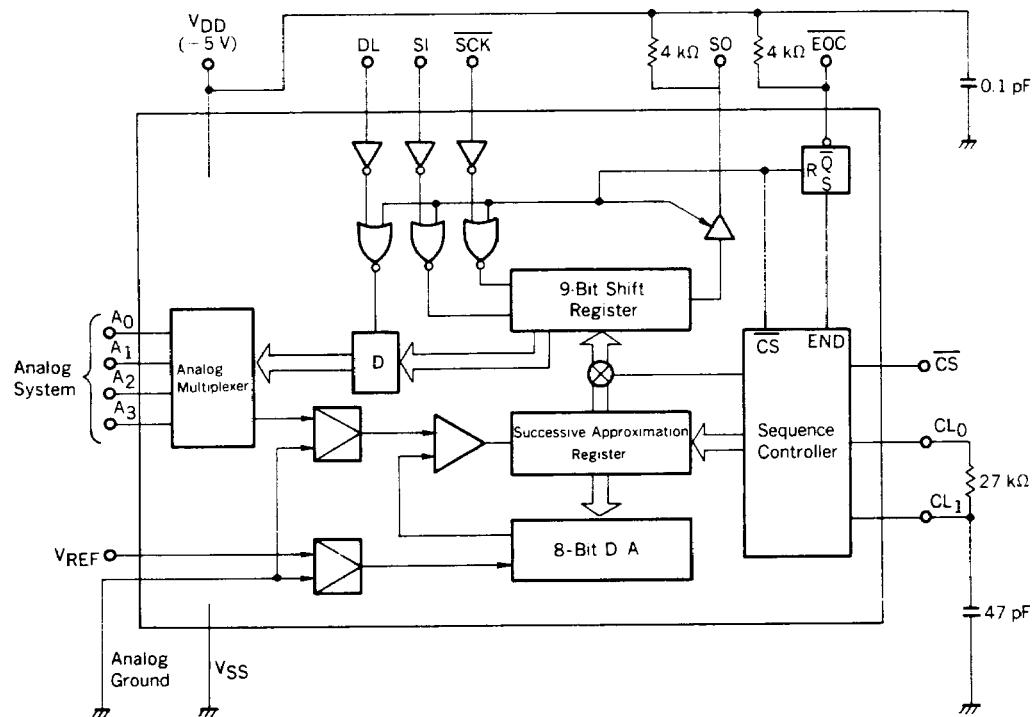


TIMING CHART

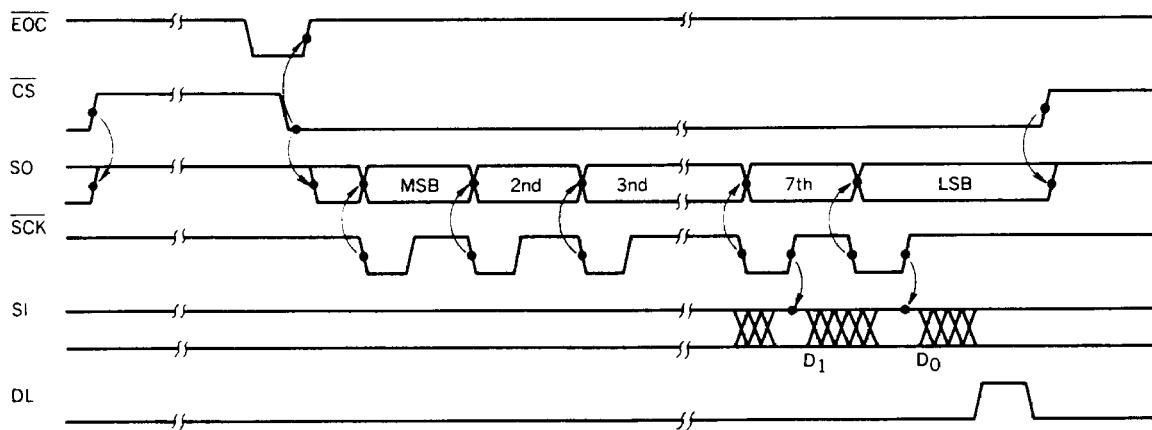


Multiplexer Channel Selection

Analog Input Address	D ₀	D ₁
A ₀	Low	Low
A ₁	High	Low
A ₂	Low	High
A ₃	High	High

APPLICATION EXAMPLE: REDUCING DIGITAL I/O TERMINALS

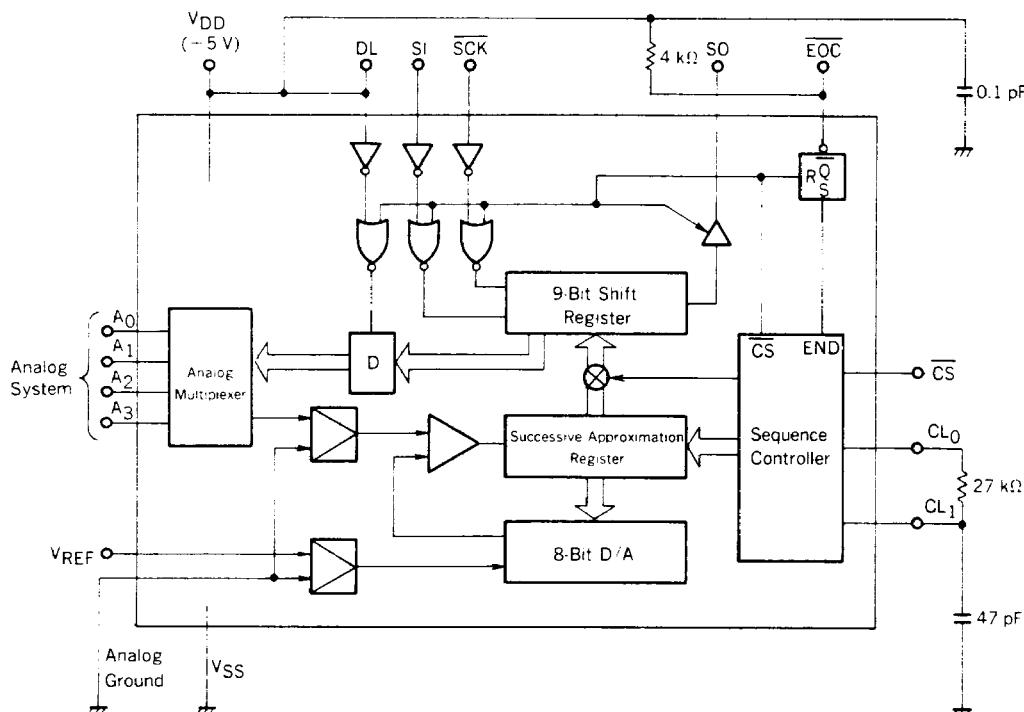

TIMING CHART

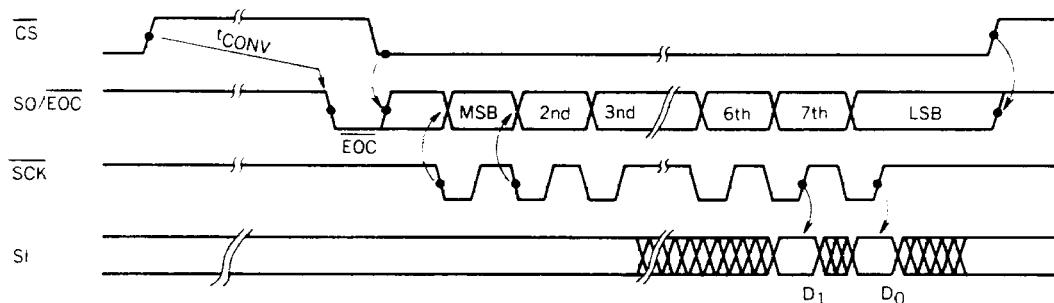


In this application, an MPX address write is required in every Date Read.

A wired OR connection is feasible, because \overline{EOC} and SO are both open drain output and the signal output timing of \overline{EOC} is different from that of SO .

The DL signal is strobed by \overline{CS} in the chip. Therefore, by connecting DL to V_{DD} , MPX Address Data is latched at the rising edge of \overline{CS} .

16PIN PLASTIC DIP (300 mil)

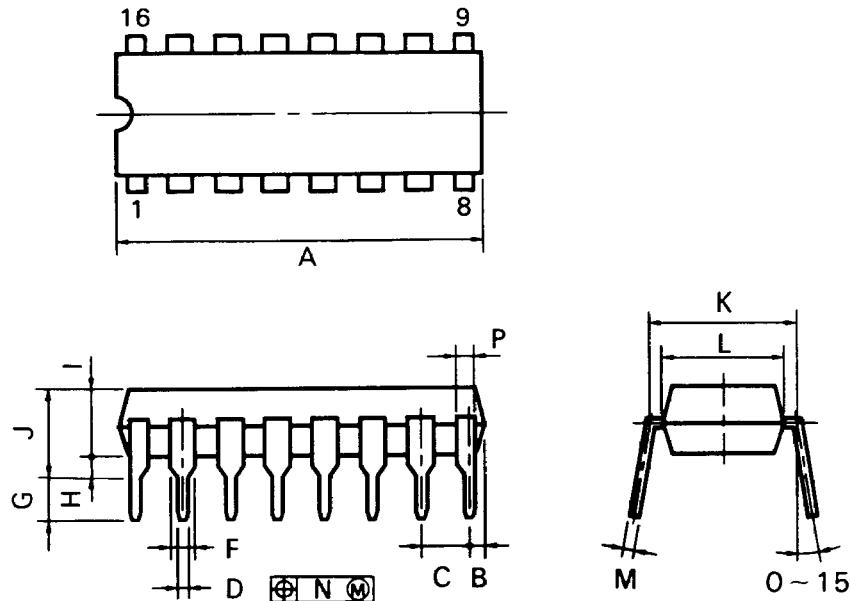

P16C-100-300A.C

NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	20.32 MAX.	0.800 MAX.
B	1.27 MAX.	0.050 MAX.
C	2.54 (T.P.)	0.100 (T.P.)
D	$0.50^{+0.10}$	$0.020^{+0.004}$
F	1.2 MIN.	0.047 MIN.
G	$3.5^{+0.3}$	$0.138^{+0.012}$
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
K	7.62 (T.P.)	0.300 (T.P.)
L	6.4	0.252
M	$0.25^{+0.10}$	$0.010^{+0.003}$
N	0.25	0.01
P	1.0 MIN.	0.039 MIN.