

ALUMINUM ELECTROLYTIC CAPACITORS

宝创UPXLA62MHD供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

nichicon

PX

Long Life Assurance

series



Long Life



Low Impedance



Anti-Solvent Feature

- Load life of 20000 hours at 105°C.
- Adapted to the RoHS directive (2002/95/EC).

PM

Long Life


PX



Specifications

Item	Performance Characteristics						
Category Temperature Range	-55 ~ +105°C						
Rated Voltage Range	10 ~ 35V						
Rated Capacitance Range	1 ~ 4700μF						
Capacitance Tolerance	± 20% (120Hz, 20°C)						
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.						
tan δ	Rated voltage (V)	10	16	25	35	Measurement frequency : 120Hz	
	tan δ (MAX)	0.20	0.16	0.14	0.12	Temperature : 20°C	
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.						
Stability at Low Temperature	Rated voltage (V)		10	16	25	35	Measurement frequency : 120Hz
	Impedance ratio (MAX.)	Z-25°C / Z+20°C	3	2	2	2	
		Z-40°C / Z+20°C	4	4	4	4	
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 20000 hours at 105°C, the peak voltage shall not exceed the rated D.C. voltage, capacitor meet the characteristic requirements listed below.						
	Capacitance change		Within ±30% of initial value				
	tan δ		300% or less of initial specified value				
	Leakage current		Initial specified value or less				
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.						
Marking	Printed with white color letter on dark brown sleeve.						

Radial Lead Type

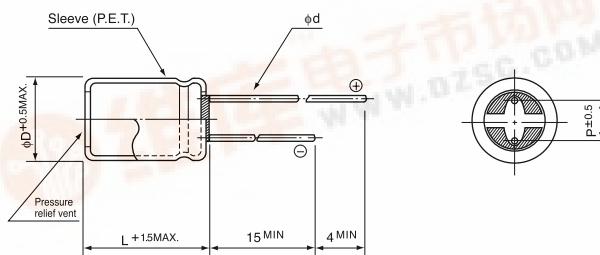

	(mm)			
φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.8	0.8

Type numbering system (Example : 16V 220µF)

1 2 3 4 5 6 7 8 9 10 11
U P X 1 C 2 2 1 M P D

Configuration ※

Capacitance tolerance (±20%)

Rated Capacitance (220µF)

Rated voltage (16V)

Series name

Type

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 ~ 18	HD

- Please refer to page 21 about the end seal configuration.



■ Dimensions

V (Code)		10 (1A)		16 (1C)		25 (1E)		35 (1V)	
Cap. (μ F)	Item Code	Case size ϕ D $\times$ L (mm)	Rated Ripple (mA _{rms}) 105°C / 100kHz	Case size ϕ D $\times$ L (mm)	Rated Ripple (mA _{rms}) 105°C / 100kHz	Case size ϕ D $\times$ L (mm)	Rated Ripple (mA _{rms}) 105°C / 100kHz	Case size ϕ D $\times$ L (mm)	Rated Ripple (mA _{rms}) 105°C / 100kHz
1	010							10 $\times$ 12.5	59
2.2	2R2							10 $\times$ 12.5	84
3.3	3R3							10 $\times$ 12.5	101
4.7	4R7							10 $\times$ 12.5	143
10	100							10 $\times$ 12.5	294
22	220							10 $\times$ 12.5	336
33	330							10 $\times$ 12.5	378
47	470							10 $\times$ 12.5	420
100	101					10 $\times$ 12.5	420	10 $\times$ 20	672
220	221			10 $\times$ 16	504	12.5 $\times$ 20	840	12.5 $\times$ 25	1008
330	331	10 $\times$ 16	504	10 $\times$ 20	672	12.5 $\times$ 25	1008	16 $\times$ 25	1344
470	471	10 $\times$ 20	672	12.5 $\times$ 20	1008	16 $\times$ 25	1344	16 $\times$ 31.5	1680
1000	102	12.5 $\times$ 25	1008	16 $\times$ 25	1344	16 $\times$ 31.5	1680	18 $\times$ 40	2184
2200	222	16 $\times$ 31.5	1680	18 $\times$ 35.5	2016				
3300	332	18 $\times$ 35.5	2016	18 $\times$ 40	2184				
4700	472	18 $\times$ 40	2184						

• Frequency coefficient of rated ripple current

Frequency	120Hz	1kHz	10kHz	100kHz ~
Coefficient	0.75	0.8	0.9	1.0