

ALUMINUM ELECTROLYTIC CAPACITORS

定制USV010MFD供应

捷多邦，专业PCB打样工厂，24小时加急出货

nichicon



SV

7mmL, Long Life Assurance

series




- Extended load life of 5000 hours at +105°C, with 7mm height.
- Adapted to the RoHS directive (2002/95/EC).

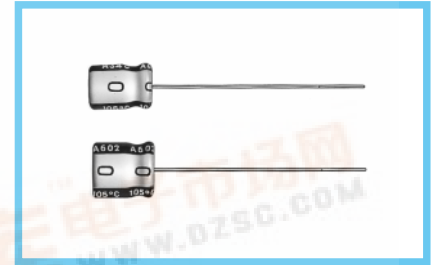


Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 ~ +105°C							
Rated Voltage Range	6.3 ~ 50V							
Rated Capacitance Range	0.1 ~ 220μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3(μA), whichever is greater.							
tan δ	Measurement frequency : 120Hz, Temperature : 20°C							
	Rated voltage (V)	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.24	0.21	0.18	0.15	0.13	0.12	
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)		6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	4	3	2	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	8	6	4	3	3	3
Endurance	After 5000 hours' application of rated voltage at 105°C, capacitors meet the characteristic requirements listed at right.				Capacitance change		Within ±30% of initial value	
					tan δ		300% or less of initial specified value	
					Leakage current		Initial specified value or less	
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.							
Marking	Printed with silver color letter on dark brown sleeve.							

Radial Lead Type

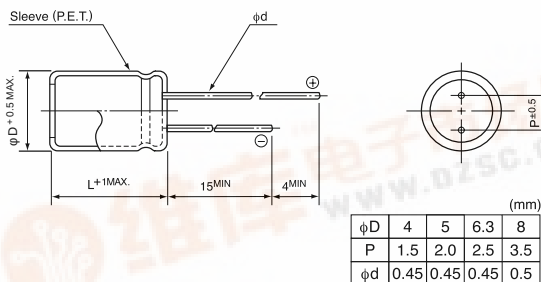

Type numbering system (Example: 10V 33μF)

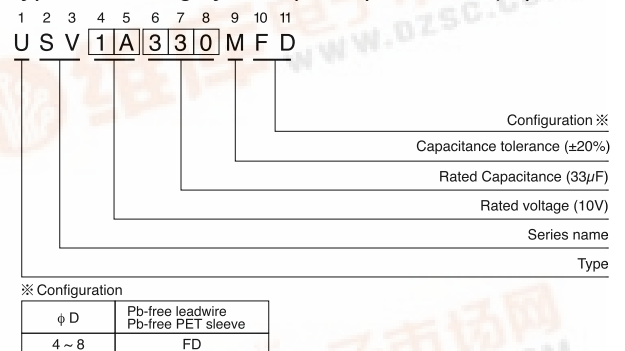

Dimensions

V		6.3		10		16		25		35		50	
Cap.(μF)	Code	0J		1A		1C		1E		1V		1H	
0.1	0R1											4 × 7	1.0
0.22	R22											4 × 7	2.3
0.33	R33											4 × 7	3.5
0.47	R47											4 × 7	5.0
1	010											4 × 7	10
2.2	2R2											4 × 7	19
3.3	3R3											4 × 7	24
4.7	4R7									4 × 7	24	5 × 7	29
10	100					4 × 7	29	5 × 7	33	5 × 7	36	6.3 × 7	44
22	220	4 × 7	34	5 × 7	38	5 × 7	44	6.3 × 7	51	6.3 × 7	57	8 × 7	65
33	330	5 × 7	42	5 × 7	47	6.3 × 7	57	6.3 × 7	63	8 × 7	72		
47	470	5 × 7	50	6.3 × 7	59	6.3 × 7	68	8 × 7	78				
100	101	6.3 × 7	77	8 × 7	96	8 × 7	107					Case size φD×L (mm)	Rated ripple
220	221	8 × 7	130										

Rated Ripple (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz ~
-----------	-------	--------	--------	-------	----------

Please refer to page 21, 22, 23 about the formed or taped product spec