



# UNISONIC TECHNOLOGIES CO., LTD

## UZ1085

## LINEAR INTEGRATED CIRCUIT

### 3A ADJUSTABLE/FIXED LOW DROPOUT LINEAR REGULATOR


#### DESCRIPTION

The UZ1085-xx series are low dropout three-terminal regulators with 3A output current capability. These devices have been optimized for low voltage applications including VTT bus termination, where transient response and minimum input voltage are critical.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload and ambient temperature that would create excessive junction temperatures.

#### FEATURES

- \*Fast transient response
- \*Low dropout voltage at up to 3A
- \*Load regulation:0.05% typical
- \*Trimmed current limit
- \*On-chip thermal limiting

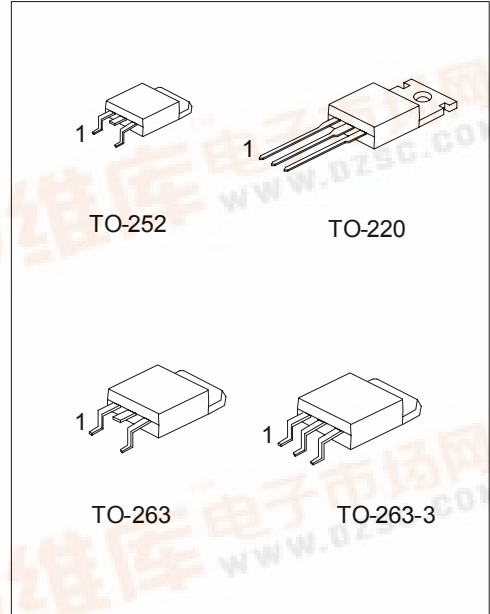

\*Pb-free plating product number: UZ1085L-xx

#### ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
UZ1085-xx-TA3-A-T	UZ1085L-xx-TA3-A-T	TO-220	A/G	O	I	Tube
UZ1085-xx-TN3-A-R	UZ1085L-xx-TN3-A-R	TO-252	A/G	O	I	Tape Reel
UZ1085-xx-TN3-A-T	UZ1085L-xx-TN3-A-T	TO-252	A/G	O	I	Tube
UZ1085-xx-TQ2-A-R	UZ1085L-xx-TQ2-A-R	TO-263	A/G	O	I	Tape Reel
UZ1085-xx-TQ2-A-T	UZ1085L-xx-TQ2-A-T	TO-263	A/G	O	I	Tube
UZ1085-xx-TQ3-A-R	UZ1085L-xx-TQ3-A-R	TO-263-3	A/G	O	I	Tape Reel
UZ1085-xx-TQ3-A-T	UZ1085L-xx-TQ3-A-T	TO-263-3	A/G	O	I	Tube

Note: 1. xx: Output Voltage, refer to Marking Information.

2. A: ADJ (for adjustable regulator), G: GND (for fixed regulator)

<p>UZ1085L-xx-TA3-A-T</p>	<p>(1) Packing Type (1) R: Tape Reel, T: Tube                  (2) Pin Assignment (2) refer to Pin Assignment                  (3) TA3: TO-220, TN3: TO-252, TQ2: TO-263, TQ3: TO-263-3                  (4) xx: refer to Marking Information                  (5) L: Lead Free Plating Blank: Pb/Sn</p>
---------------------------	--

# UZ1085

## LINEAR INTEGRATED CIRCUIT

### MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
TO-220	15 : 1.5V	
TO-252	18 : 1.8V	
TO-263	25 : 2.5V	
TO-263	33 : 3.3V	
TO-263-3	50 : 5.0V	
	AD : ADJ	

### THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Thermal Resistance Junction-Case	TO-252	$\Theta_{JC}$	12	°C/W
	TO-220		4	
	TO-263		4	

# UZ1085

## LINEAR INTEGRATED CIRCUIT

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	18	V
$(V_{IN} - V_{OUT}) * I_{OUT}$		See Figure 1	
Junction Temperature	$T_J$	+125	°C
Operating Temperature	$T_{OPR}$	-20 ~ +85	°C
Storage Temperature	$T_{STG}$	-40 ~ +150	°C

Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0°C~+70°C operating temperature range and assured by design from -20°C~+85°C.

### ■ ELECTRICAL CHARACTERISTICS (Ta=25°C, C<sub>OUT</sub>=22 μF, unless otherwise specified.)



#### For UZ1085-ADJ(Adjustable)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reference Voltage	$V_{REF}$	$1.5V \leq (V_{IN} - V_{OUT}) \leq 8.25V$ $10mA \leq I_{OUT} \leq 3A$	1.225	1.25	1.275	V
Line Regulation	$\Delta V_{OUT}$	$(V_{OUT} + 1.5V) \leq V_{IN} \leq 12V,$ $I_{OUT}=10mA$		0.005	0.2	%
Load Regulation	$\Delta V_{OUT}$	$(V_{IN} - V_{OUT})=3V, 10mA \leq I_{OUT} \leq 3A$		0.05	0.5	%
Dropout Voltage	$V_D$	$\Delta V_{REF}\%=1\%, I_{OUT}=3A$		1.30	1.40	V
Current Limit	$I_{LIMIT}$	$(V_{IN}-V_{OUT})=2V$	3.1	4		A
Adjust Pin Current	$I_{adj}$			35	120	μA
Adjust Pin Current Change	$\Delta I_{adj}$	$1.5V \leq (V_{IN} - V_{OUT}) \leq 12V,$ $10mA \leq I_{OUT} \leq 3A$		0.2	5	μA
Minimum Load Current	$I_{O(MIN)}$	$1.5V \leq (V_{IN}-V_{OUT}) \leq 12V$			10	mA
Quiescent Current	$I_Q$	$V_{IN}=12V$		4	13	mA
Ripple Rejection	RR	$f=120Hz, \text{Tantalum}, (V_{IN}-V_{OUT})=3V$ $I_{OUT}=3A$	60	72		dB
Thermal Regulation		Ta=25°C, 30ms pulse		0.004	0.02	%/W
Temperature Stability	$\Delta V_{OUT}$			0.5		%
Long-Term Stability	$\Delta V_{OUT}$	Ta=125°C, 1000hr		0.03	1.0	%
Output Noise(% of V <sub>OUT</sub> )	eN	Ta=25°C, 10Hz ≤ f ≤ 10kHz		0.003		%
Thermal Shutdown				150		°C

#### For UZ1085-xx(Fixed Voltage)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	UZ1085-15	$3.0V \leq V_{IN} \leq 8.5V, 10mA \leq I_{OUT} \leq 3A$	1.470	1.5	1.530	V
	UZ1085-18		1.764	1.8	1.830	
	UZ1085-25		2.450	2.5	2.550	
	UZ1085-33		3.234	3.3	3.366	
	UZ1085-50		4.900	5.0	5.100	
Line Regulation	$\Delta V_{OUT}$	$(V_{OUT} + 1.5V) \leq V_{IN} \leq 12V, I_{OUT}=10mA$		0.005	0.2	%
Load Regulation	$\Delta V_{OUT}$	$(V_{IN} - V_{OUT})=3V, 10mA \leq I_{OUT} \leq 3A$		0.05	0.5	%
Dropout Voltage	$V_D$	$\Delta V_{REF}\%=1\%, I_{OUT}=3A$		1.30	1.40	V
Current Limit	$I_{LIMIT}$	$(V_{IN}-V_{OUT})=2V$	3.1	4		A
Minimum Load Current	$\Delta I_{adj}$	$1.5V \leq (V_{IN}-V_{OUT}) \leq 12V$			10	mA
Quiescent Current	$I_Q$	$V_{IN}=12V$		4	13	mA
Ripple Rejection	RR	$f=120Hz, \text{Tantalum},$ $(V_{IN} - V_{OUT})=3V, I_{OUT}=3A$	60	72		dB
Thermal Regulation		Ta=25°C, 30ms pulse		0.004	0.02	%/W
Temperature Stability	$\Delta V_{OUT}$	Ta=125°C, 1000hr		0.5		%
Long-Term Stability	$\Delta V_{OUT}$			0.03	1.0	%
Output Noise(% of V <sub>OUT</sub> )	eN	Ta=25°C, 10Hz ≤ f ≤ 10kHz		0.003		%
Thermal shutdown				150		°C

## ■ TYPICAL APPLICATION CIRCUIT

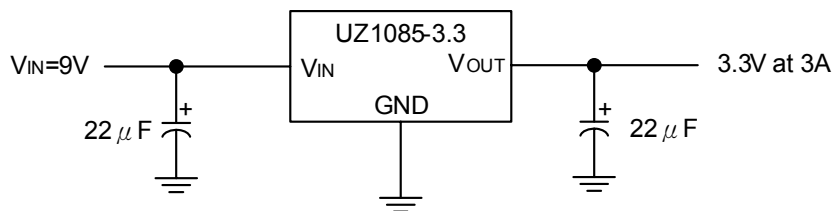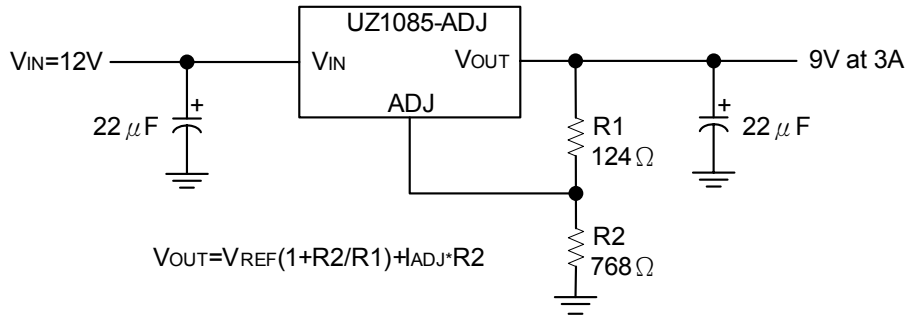

## TYPICAL CHARACTERISTICS

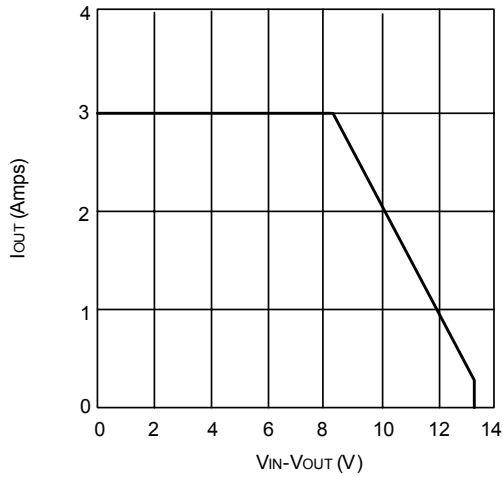


Figure 1. Absolute Maximum Safe Operating Area

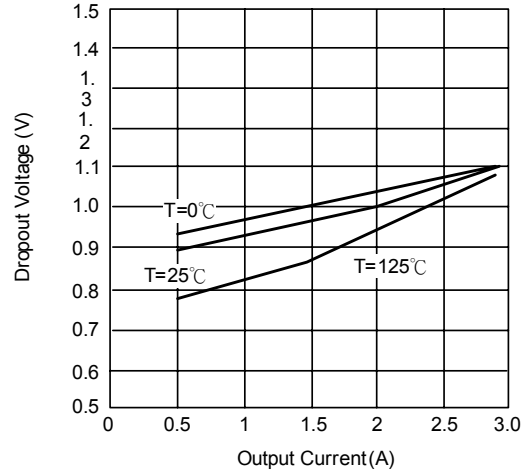


Figure 2. Dropout Voltage vs. Output Current

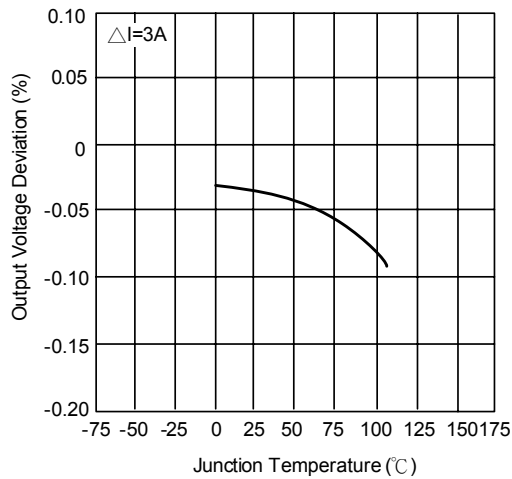


Figure 3. Load Regulation vs. Temperature

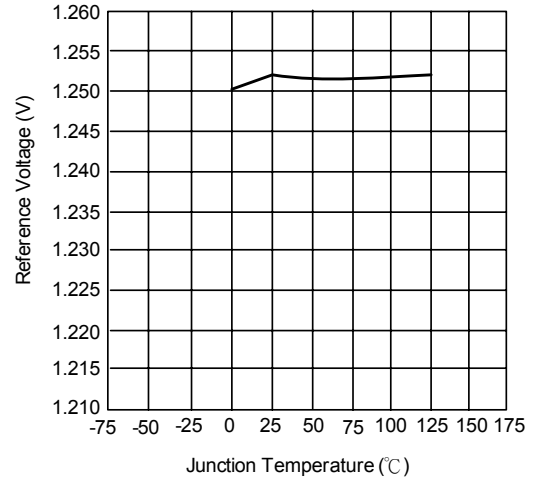


Figure 4. Reference Voltage vs. Temperature

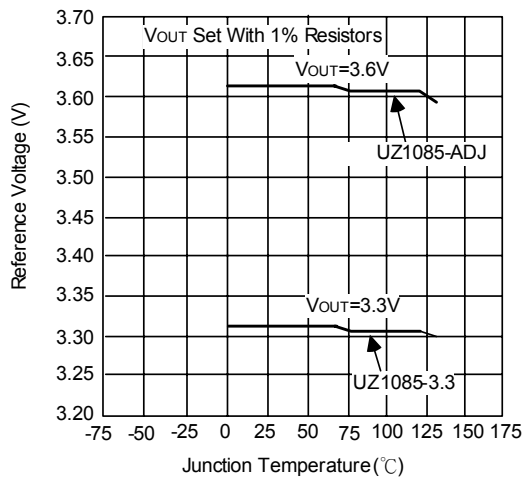


Figure 5. Output Voltage vs. Temperature

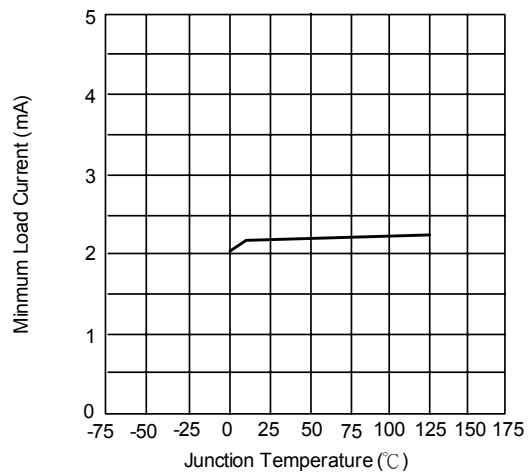


Figure 6. Minimum Load Current vs. Temperature

## ■ TYPICAL CHARACTERISTICS(Cont.)

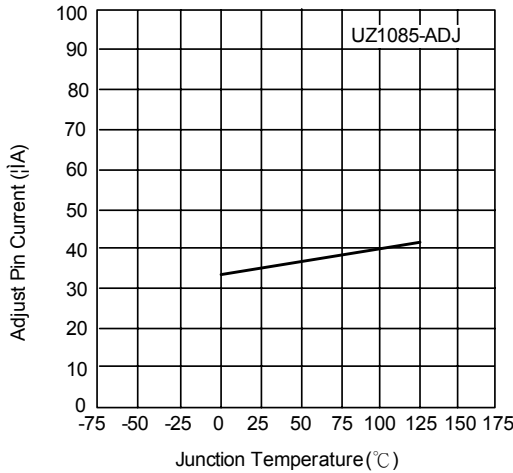


Figure 7. Adjust Pin Current vs. Temperature

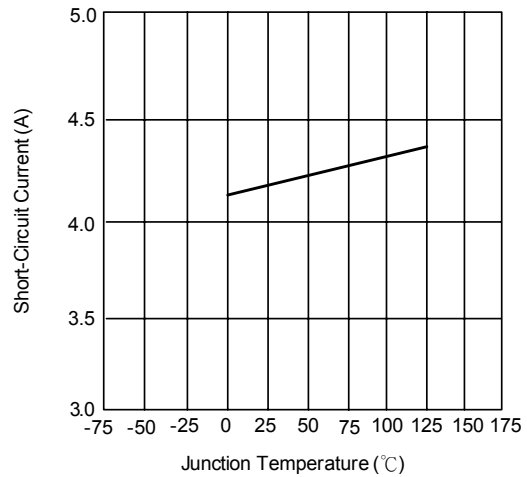


Figure 8. Short-Circuit Current vs. Temperature

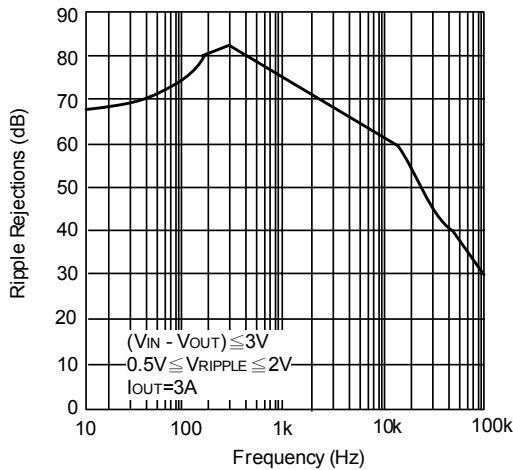


Figure 9. Ripple Rejection vs. Frequency

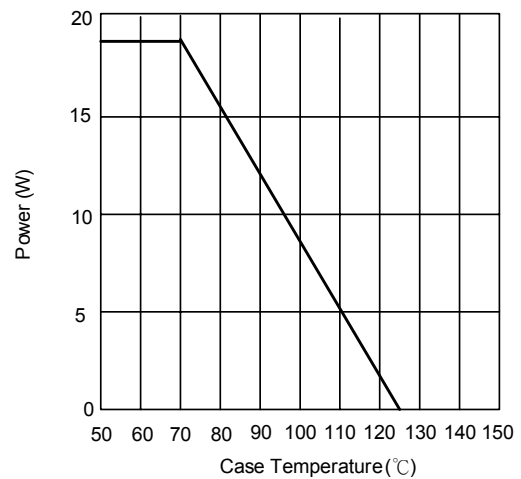


Figure 10. Maximum Power Dissipation

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.