



UNISONIC TECHNOLOGIES CO., LTD

U74HC14

CMOS IC


HIGH-SPEED CMOS LOGIC HEX INVERTING SCHMITT TRIGGER

DESCRIPTION

The UTC **U74HC14** each contain six inverting Schmitt triggers in one package. Each of them perform the Boolean function $Y=\bar{A}$.

FEATURES

- * Widely range of input rise and fall time
- * high noise immunity
- * Fan-out parameters(over temperature range)
up to 10 LSTTL Loads
- * Low power consumption
- * Wide range operation 2V ~ 6V

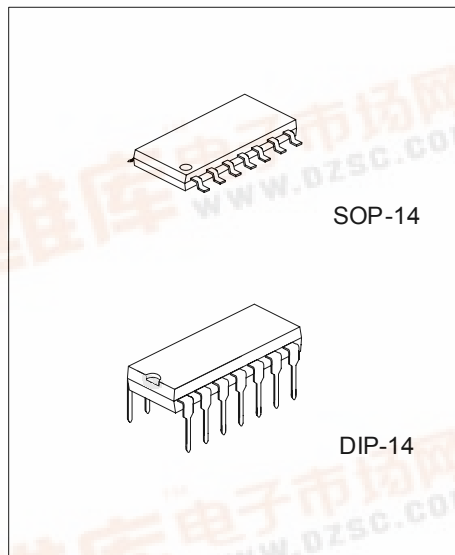


*Pb-free plating product number: U74HC14L

ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
U74HC14-D14-T	U74HC14L-D14-T	DIP-14	Tube
U74HC14-S14-R	U74HC14L-S14-R	SOP-14	Tape Reel
U74HC14-S14-T	U74HC14L-S14-T	SOP-14	Tube

U74HC14L-D14-T (1)Packing Type (2)Package Type (3)Lead Plating	(1) R: Tape Reel, T: Tube (2) D14: DIP-14, S14: SOP-14 (3) L: Lead Free Plating, Blank: Pb/Sn
--	--

PIN CONFIGURATION

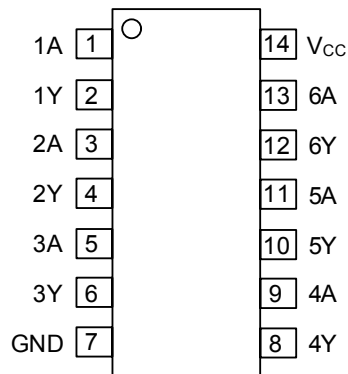

FUNCTIONAL DIAGRAM

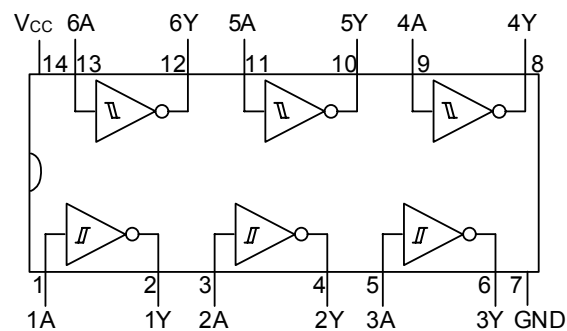

TRUTH TABLE

INPUT(A)	OUTPUT(Y)
L	H
H	L

H=High level

L=Low Level

■ LOGIC DIAGRAM

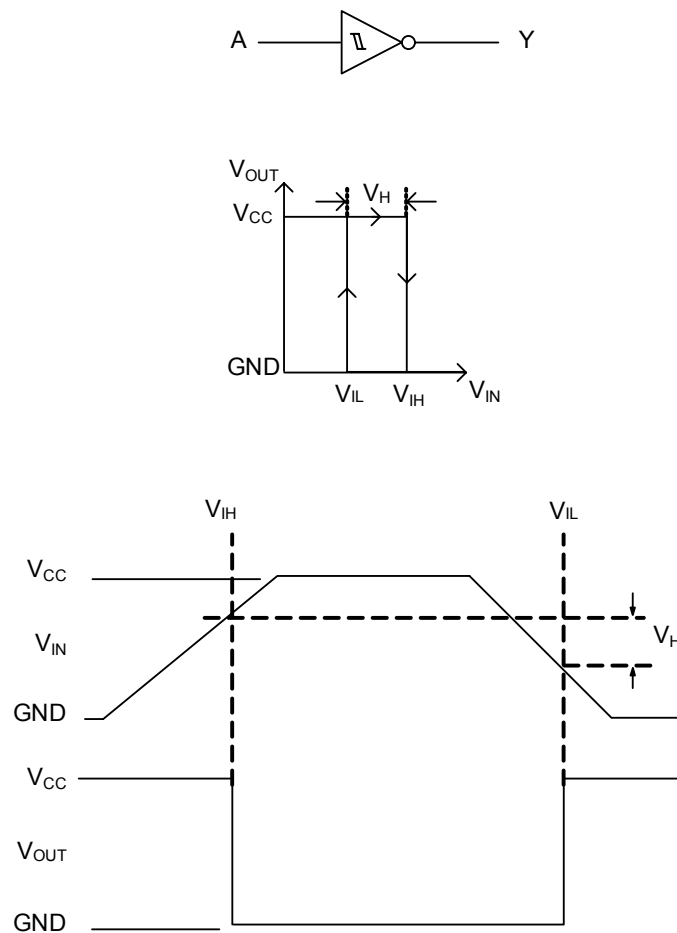


Figure 1. Hysteresis Definition, Characteristic, And Test Setup

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
DC Supply Voltage		V_{CC}	-0.5V~9V	V
DC Input Clamp Current	For $V_{IN} < -0.5V$ or $V_{IN} > V_{CC} + 0.5V$	I_{IK}	$\pm 20mA$	mA
DC Output Clamp Current	For $V_{OUT} < -0.5V$ or $V_{OUT} > V_{CC} + 0.5V$	I_{OK}	$\pm 20mA$	mA
DC Drain Current, per Output	For $-0.5V < V_{OUT} < V_{CC} + 0.5V$	I_{OUT}	$\pm 25mA$	mA
DC Output Source or Sink Current Per Output Pin	For $V_{OUT} > -0.5V$ or $V_{OUT} < V_{CC} + 0.5V$	I_{OUT}	$\pm 25mA$	mA
DC V_{CC} or Ground Current		I_{CC}	$\pm 50mA$	mA
Operating Conditions				
Supply Voltage Range HC Types		V_{CC}	0V~ V_{CC}	V
DC Input or Output Voltage		V_{IN}, V_{OUT}	0V~ V_{CC}	V
Operating Temperature		T_A	-40~+85°C	V
Storage Temperature		T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction Ambient	θ_{JA}	86	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Switch Points	V_{IH}	$V_{CC}=2V$	0.7	1.2	1.5	V
		$V_{CC}=4.5V$	1.55	2.5	3.15	V
		$V_{CC}=6V$	2.1	3.3	4.2	V
	V_{IL}	$V_{CC}=2V$	0.3	0.6	1	V
		$V_{CC}=4.5V$	0.9	1.6	2.45	V
		$V_{CC}=6V$	1.2	2	3.2	V
High Level Output Voltage CMOS Loads	V_{OH}	$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=2V$, $I_{OUT}=-0.02mA$	1.9			V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=4.5V$, $I_{OUT}=-0.02mA$	4.4			V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=6V$, $I_{OUT}=-0.02mA$	5.9			V
High Level Output Voltage TTL Loads	V_{OH}	$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=4.5V$, $I_{OUT}=-4mA$	3.98			V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=6V$, $I_{OUT}=-5.2mA$	5.48			V
Low Level Output Voltage CMOS Loads	V_{OL}	$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=2V$, $I_{OUT}=0.02mA$			0.1	V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=4.5V$, $I_{OUT}=0.02mA$			0.1	V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=6V$, $I_{OUT}=0.02mA$			0.1	V
Low Level Output Voltage TTL Loads	V_{OL}	$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=4.5V$, $I_{OUT}=4mA$			0.26	V
		$V_{IN}=V_{IH}$ or V_{IL} , $V_{CC}=6V$, $I_{OUT}=5.2mA$			0.26	V
Input Leakage Current	I_{IN}	$V_{IN}=V_{CC}$ and GND, $V_{CC}=6V$			± 0.1	μA
Quiescent Device Current	I_{CC}	$V_{IN}=V_{CC}$ or GND, $V_{CC}=6V$, $I_{OUT}=0$			2	μA

Note 1. For dual-supply systems theoretical worst case ($V_{IN} = 2.4V$, $V_{CC} = 5.5V$) specification is 1.8mA.

■ **SWITCHING SPECIFICATIONS** ($T_A = 25^\circ\text{C}$, Input $t_R, t_F = 6\text{ns}$)

PARAMETER	SYMBOL	TEST CONDITIONS	V_{CC}	MIN	TYP	MAX	UNIT
Propagation Delay, A to Y	t_{PLH}, t_{PHL}	$V_{CC}=2\text{V}, C_L=50\text{pF}$	2			40	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$	4.5			24	ns
		$V_{CC}=6\text{V}, C_L=50\text{pF}$	6			22	ns
Output Transition Times	t_{TLH}, t_{THL}	$V_{CC}=2\text{V}, C_L=50\text{pF}$	2			19	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$	4.5			16	ns
		$V_{CC}=6\text{V}, C_L=50\text{pF}$	6			15	ns
Input Capacitance	C_{IN}					10	pF
Power Dissipation Capacitance (Notes 2, 3)	C_{PD}	$V_{CC}=5\text{V},$	5		20		pF

Note 2. C_{PD} is used to determine the dynamic power consumption, per inverter.

3. $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$ where f_i = input frequency, C_L = output load capacitance, V_{CC} = supply voltage.

■ TEST CIRCUITS AND WAVEFORMS

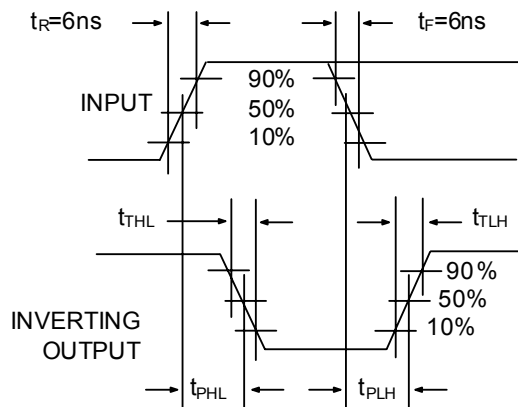


Figure 2. U74HC14 Transition Times And Propagation Delay Times, Combination Logic

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.