



TOLERANCE UNLESS SPECIFIED = **XX** = +/- .005 **XX** = +/- .015 FRACTIONS = +/- .032

12-1600.DC2

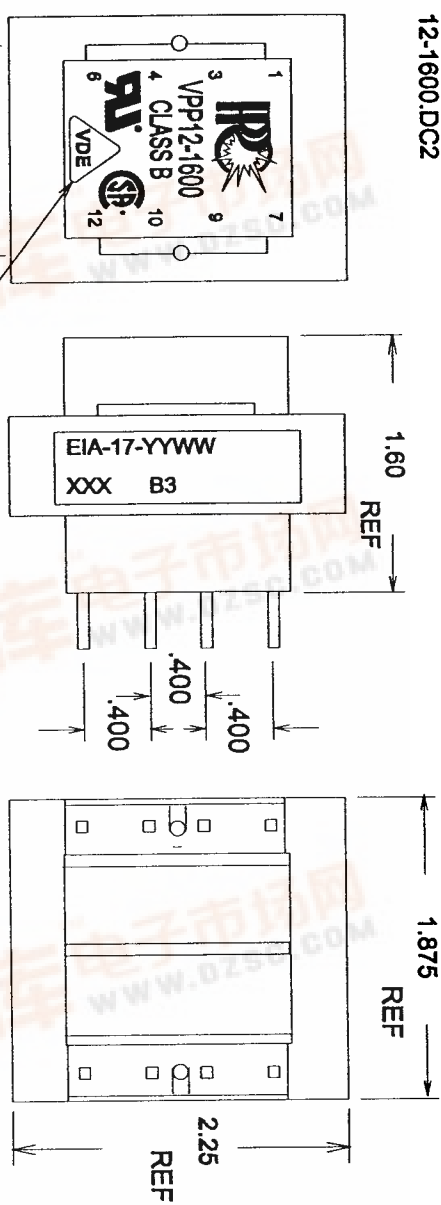

ALL MANUFACTURING SITES USE THIS MARK

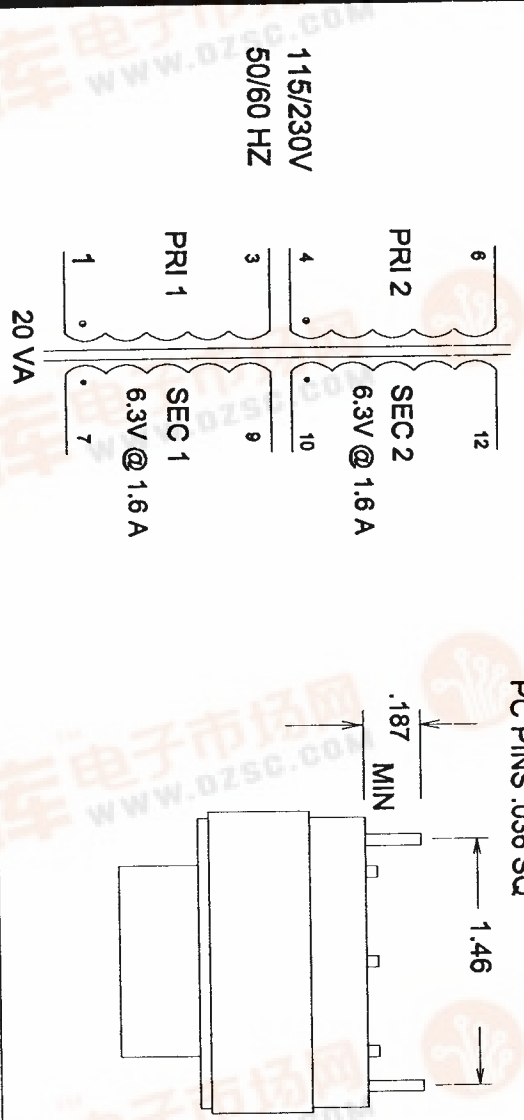

PRODUCTION TESTS

DC	1-3 =	77 NOM
RESISTANCE	4-6 =	90 NOM
IN OHMS	7-9 =	0.32 NOM
	10-12 =	0.37 NOM

MAX EXCITATION CURRENT = 0.030 A
 APPLY 230V 60HZ 1-6 (3+4)
 PRI WDGs 114.5 TO 115.5 V
 SEC WDGs 7.3 TO 7.85 V

HIPOT: 4000V P-S
 4000V P-S, TO CORE
 600V P-P, S-S

IMPREGNATION NOTES: PREHEAT 2 HRS
 PINS TO BE FREE OF IMPREGNATION.

FINAL ASSEMBLY NOTES

METHOD 1 X 1
 LEAVE OFF LAST 1/4" PCS

MARKING SEE LABEL DETAIL ABOVE
 APPLY PART NO. LABEL AFTER IMPREGNATION

IPD PART NO.: VPP12-1600

查询VPP12-1600供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

-1600
 RK
 I.XLS