



查询V515ME01-LF供应商

Z-Communications, Inc.
9939 Via Pasar • San Diego, CA 92126
TEL (858) 621-2700 FAX (858) 621-2722

捷多邦，专业PCB打样工厂 24小时加急出货

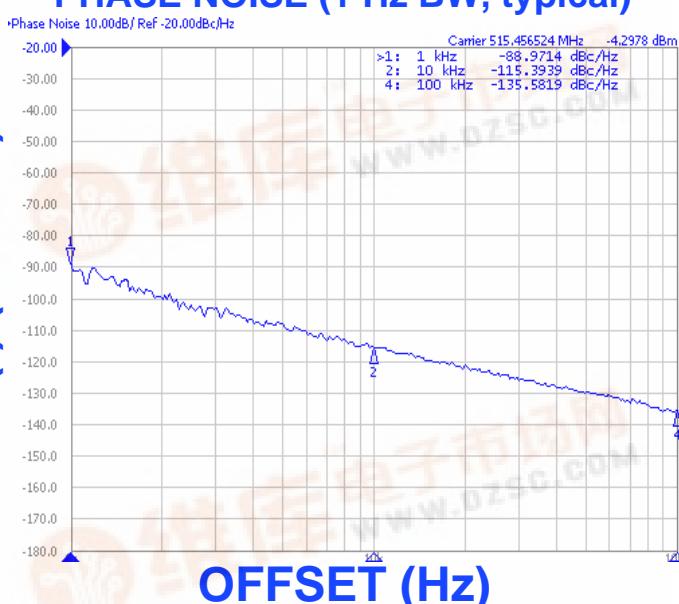
V515ME01-LF
VOLTAGE CONTROLLED OSCILLATOR
Rev A1

FEATURES

- Frequency Range: 502 - 529 MHz
- Tuning Voltage: 0.5-4.5 Vdc
- MINI-16M- - Style Package

APPLICATIONS

- Satellite Communications
- RF Modems
-

 $\xi(f)$ (dBc/Hz)**OFFSET (Hz)****PERFORMANCE SPECIFICATIONS****VALUE****UNITS**

Oscillation Frequency Range	502 - 529	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-115	dBc/Hz
Harmonic Suppression (2nd, typ.)	-10	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	10	MHz/V
Power Output	0±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	150	pF
Pushing	<1	MHz/V
Pulling (14dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16M-LOW	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	10	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

