


# Kingbright

## SUPER FLUX LED LAMP

### PRELIMINARY SPEC

Part Number: WP7679C1QBC/D

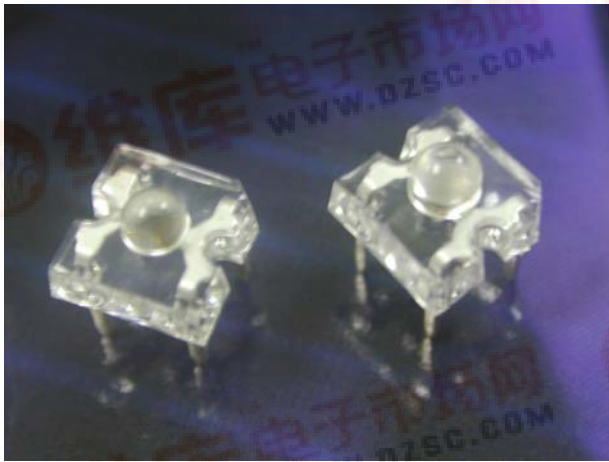

### Technical Data



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

#### Description

Static electricity and surge damage the LEDs. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

#### Features:

- \* High Luminance output.
- \* Design for High Current Operation.
- \* Uniform Color.
- \* Low Power Consumption.
- \* Low Thermal Resistance.
- \* Low Profile.
- \* Packaged in tubes for use with automatic insertion equipment.
- \* RoHS Compliant.

#### Benefits:


- \* Outstanding Material Efficiency.
- \* Electricity savings.
- \* Maintenance savings.
- \* Reliable and Rugged.

#### Typical Applications:

- \* Automotive Exterior Lighting.
- \* Electronic Signs and Signals.
- \* Specialty Lighting.



Outline Drawings

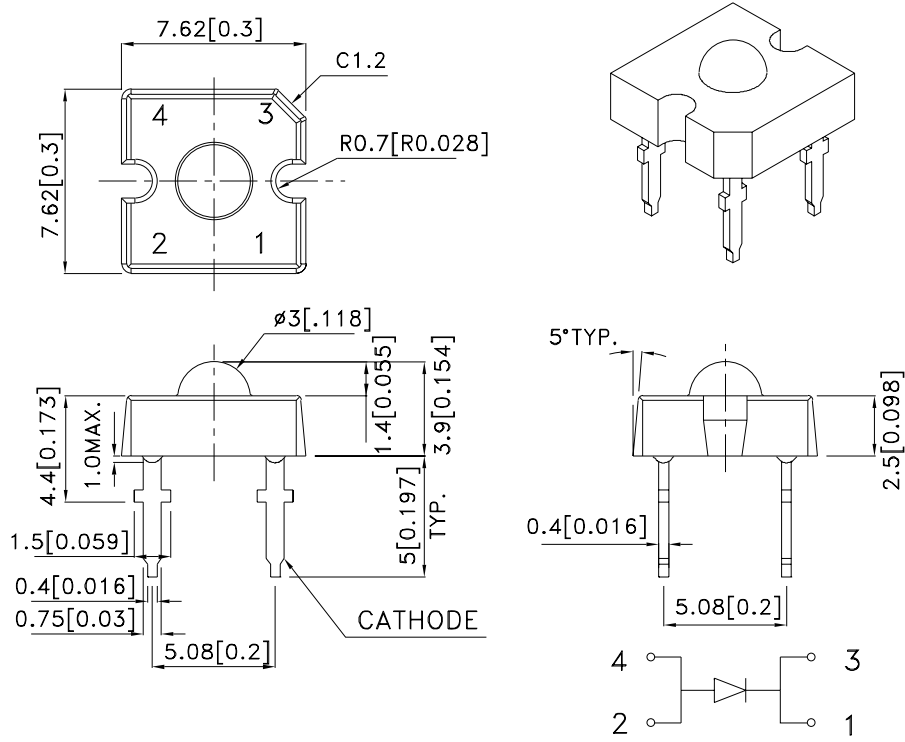

- Notes:
- 1. All dimensions are in millimeters (inches).
  - 2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
  - 3. Lead spacing is measured where the leads emerge from the package.
  - 4. Specifications are subject to change without notice.

Absolute Maximum Ratings at TA=25°C

PARAMETER	QB/D	UNITS
DC Forward Current	30	mA
Power dissipation	126	mW
Reverse Voltage	5	V
Operating Temperature	-40 To +85	°C
Storage Temperature	-40 To +85	°C
Lead Solder Temperature[1]	260°C For 5 Seconds	

1.1.5mm[0.06inch]below seating plane.

Selection Guide

Part No.	LED COLOR	Iv(cd)[1] @30mA		Viewing Angle[2] 2θ1/2 Typ.
		Min.	Typ.	
WP7679C1QBC/D	Blue (AlInGaN)	0.38	0.9	70°

Notes:  
1.Luminous intensity is measured with an integrating sphere after the device has stabilized; Luminous Intensity / luminous flux: +/-15%.  
2.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Optical Characteristics at TA=25°C  
If=30mA Rθj-a=200°C/W

DEVICE TYPE	PEAK WAVELENGTH λPEAK (nm) TYP.	DOMINANT[1] WAVELENGTH λDOM (nm) TYP.	SPECTRAL LINE WAVELENGTH Δλ1/2(nm) TYP.
QB/D	468	470	25






Note:  
1.The dominant wavelength is derived from the CIE Chromaticity Diagram and represents the perceived color of the device; Wavelength: +/-1nm.

Electrical Characteristics at TA=25°C

DEVICE TYPE	FORWARD VOLTAGE [1] VF (VOLTS) @ If=30mA		REVERSE CURRENT IR (uA) @ VR=5V	CAPACITANCE C (pF) @ VF=0V F=1MHZ	THERMAL RESISTANCE Rθj -pin °C/W
	TYP.	MAX.	MAX.	TYP.	TYP.
QB-D	3.5	4.2	10	100	180


Note:  
1. Forward Voltage: +/-0.1V.


## Figures

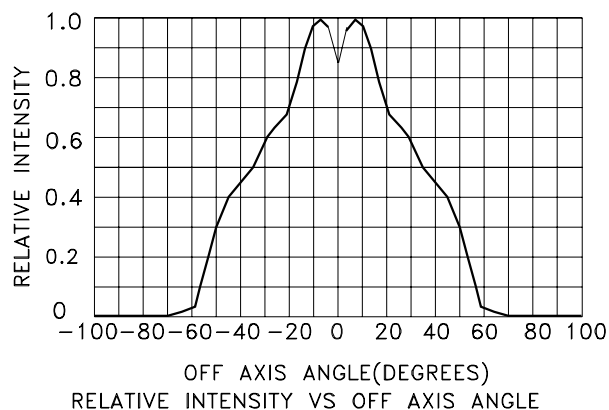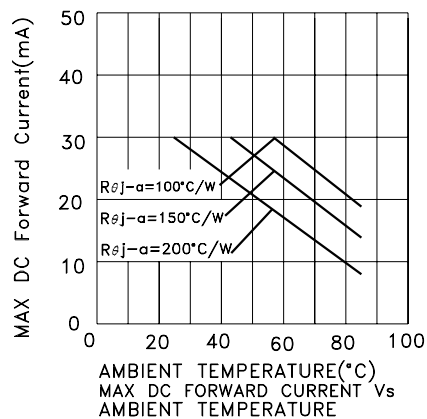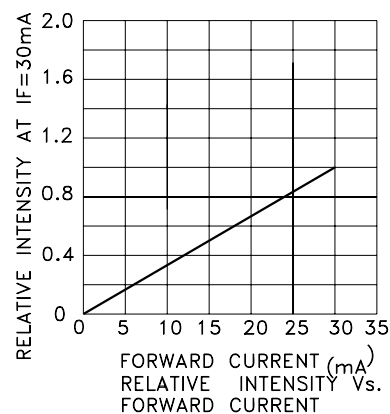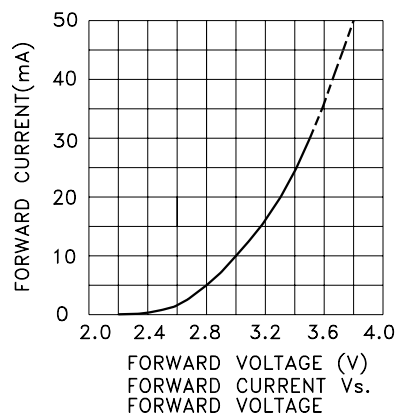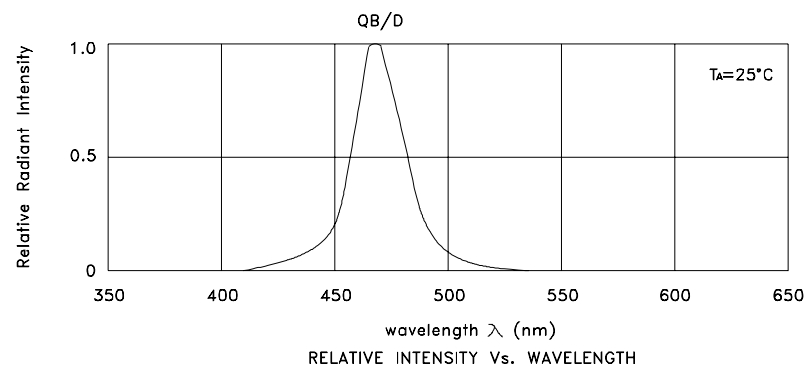

PACKING & LABEL SPECIFICATIONS

WP7679C1QBC/D

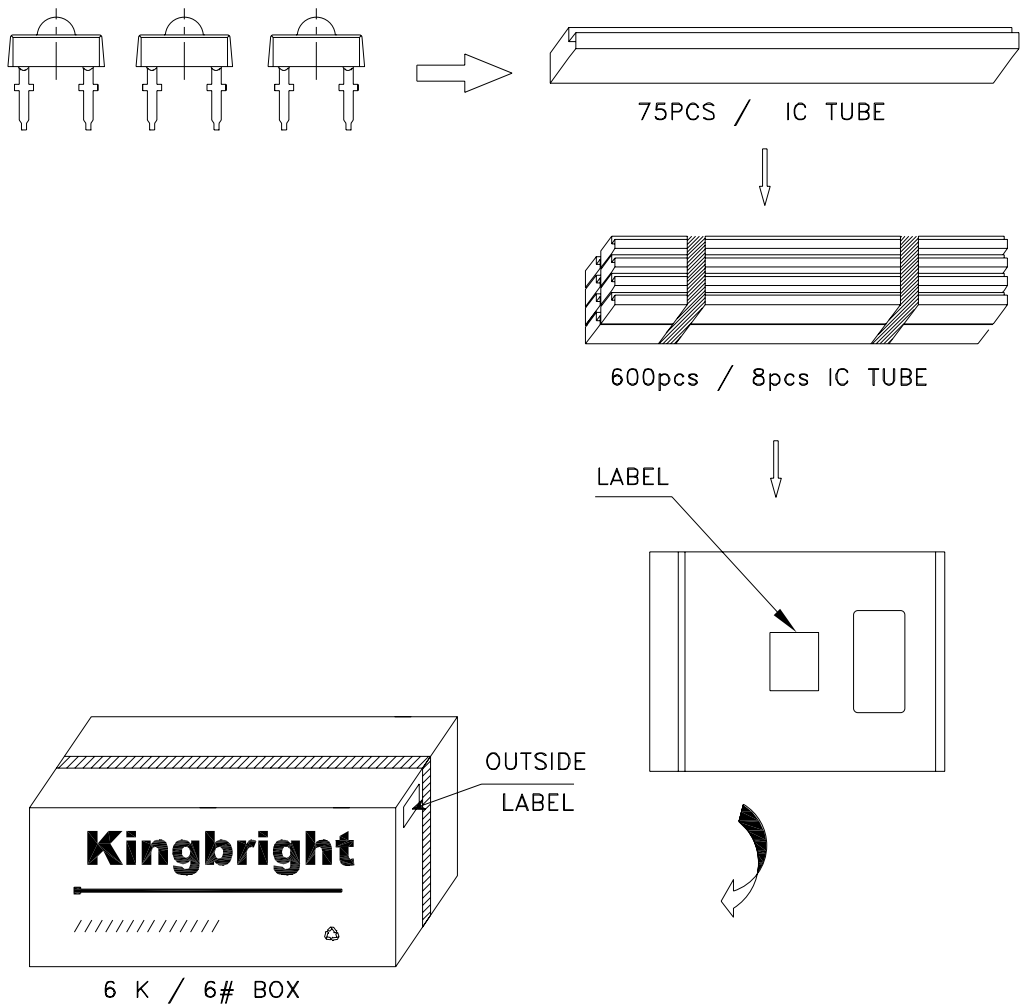

<b>Kingbright</b>	
Q.C.	
TYPE NO : WP7679C1xxx	
QUANTITY : 600 pcs	
S/N : XX	CODE: XX
LOT NO : 	
MADE IN CHINA	
RoHS Compliant	