

XC74WL4066SR

CMOS Logic

- ◆ CMOS Logic Dual Analog Switch/Multiplexer
- ◆ Operating Voltage Range : 2V ~ 5.5V
- ◆ High Speed Operations : tpd = 1.5ns TYP
- ◆ Low Power Consumption : 2 μ A (max)
- ◆ Low ON Resistance : Ron=22 Ω TYP
- ◆ MSOP-8B Package

Applications

- Palmtops
- Digital Equipment

Description

XC74WL4066SR is Dual Analog Switch manufactured using silicon gate CMOS processes. The small quiescent current, which is one of the features of the CMOS logic, gives way to high speed operations which enables LS-TTL.


With wave forming buffers connected internally, stabilized output can be achieved as the series offers high noise immunity.

As the series is integrated into a mini molded, MSOP-8B package, high density mounting is possible.

Features

- High Speed Operations : tpd = 1.5ns TYP (Vcc=5V)
- Operating Voltage Range: 2V ~ 5.5V
- Low Power Consumption: 2 μ A (max)
- Low ON Resistance : 22 Ω TYP
- Small Package : MSOP-8B

Pin Configuration

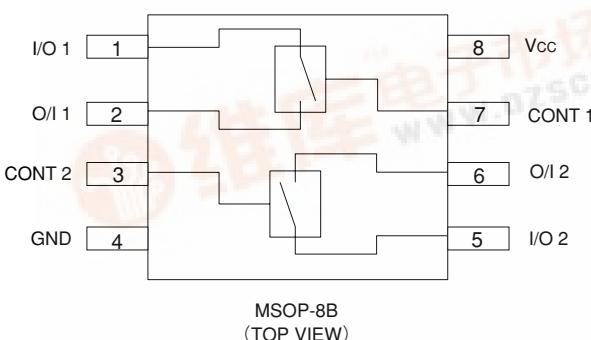


Functions

Control	State
L	OFF
H	ON

H = High Level

L = Low Level

Logic Diagram

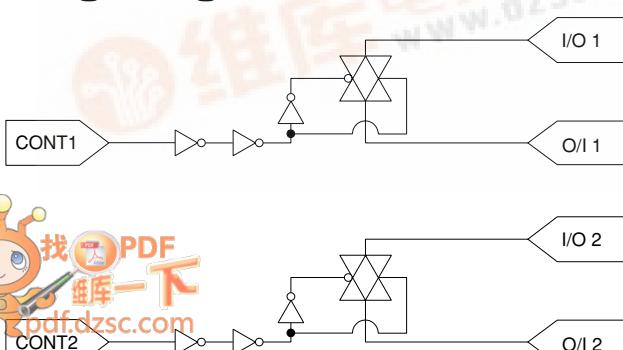

■ Absolute Maximum Ratings

Ta=−40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	VCC	−0.5~+6.0	V
Input Voltage	VCONT	−0.5~+6.0	V
Output Voltage	Vi/o	−0.5~VCC+0.5	V
Input Diode Current	I _{IK}	−20	mA
Output Diode Current	I _{OK}	±20	mA
Switch Output Current	I _{i/O}	±25	mA
VCC, GND Current	I _{CC} , I _{GND}	±50	mA
Power Dissipation (Ta = 25°C)	Pd	300	mW
Storage Temperature	T _{stg}	−65~+150	°C

Note : Voltage is all Ground standardized.

■ Recommended Operating Conditions

PARAMETER	SYMBOL	CONDITIONS	UNITS
Supply Voltage	VCC	2~5.5	V
Input Voltage	VCONT	0~5.5	V
Output Voltage	Vi/o	0~VCC	V
Operating Temperature	Topr	−40~+85	°C
Input Rise and Fall Time	tr, tf	0~200 (VCC=3.3V) 0~100 (VCC=5V)	ns

■ DC Electrical Characteristics


PARAMETER	SYMBOL	VCC (V)	CONDITIONS	Ta=25°C			Ta=−40~85°C		UNITS
				MIN	TYP	MAX	MIN	MAX	
"High" Level Control Input Voltage"	VIH	2.0		1.5	—	—	1.5	—	V
		3.0		2.1	—	—	2.1	—	
		5.5		3.85	—	—	3.85	—	
"Low" Level Control Input Voltage"	VIL	2.0		—	—	0.5	—	0.5	V
		3.0		—	—	0.9	—	0.9	
		5.5		—	—	1.65	—	1.65	
Peak ON Resistance	RONmax	2.0	VCONT=VIH VIN=0~VCC IIN/OUT=1mA	—	130	350	—	550	Ω
		3.0		—	22	50	—	65	
		4.5		—	12	25	—	35	
ON Resistance	RON(1)	2.0	VCONT=VIH VIN=GND or VCC IIN/OUT=1mA	—	23	50	—	65	Ω
		3.0		—	14	30	—	40	
		4.5		—	10	20	—	25	
Switch ON Resistance Differential	△RON	2.0	VCONT=VIH VIN=0~VCC IIN/OUT=1mA	—	13	35	—	55	Ω
		3.0		—	3	6	—	8	
		4.5		—	2	4	—	6	
Power Off Leakage Current	IS(OFF)	5.5	VCONT=VIL, VIN=VCC, VOUT=GND	—	—	±0.1	—	±1.0	μA
Power On Leakage Current	IS(ON)	5.5	VCONT=VIH, VIN=VCC or GND	—	—	±0.1	—	±1.0	μA
Control Input Current	I _{CONT}	0~5.5	VIN=VCC or GND	—	—	±0.1	—	±1.0	μA
Quiescent Supply Current	ICC	5.5	VIN=VCC or GND	—	—	2.0	—	20.0	μA

■Switching Electrical Characteristics

PARAMETER	SYMBOL	CL	VCC (V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	tPLH	15pF	2.0		—	2.5	12	—	15	ns
			3.3		—	2	4	—	5.5	
			5.0		—	1.5	3	—	4	
	tPHL	50pF	2.0		—	4	20	—	23	ns
			3.3		—	3	6	—	8	
			5.0		—	2	5	—	6	
Output Enable Time	tZL	15pF	2.0	RL=1kΩ	—	8.5	45	—	60	ns
			3.3		—	4.5	9	—	11	
			5.0		—	3.5	7.5	—	9	
	tZH	50pF	2.0	RL=1kΩ	—	9	50	—	65	ns
			3.3		—	5	10	—	12	
			5.0		—	4	8.5	—	10	
Output Disable Time	tLZ	15pF	2.0	RL=1kΩ	—	9	45	—	55	ns
			3.3		—	7	17	—	20	
			5.0		—	6	14	—	18	
	tHZ	50pF	2.0	RL=1kΩ	—	12	60	—	75	ns
			3.3		—	10	23	—	27	
			5.0		—	8	20	—	25	
Sine Wave Distortion Rate		50pF	3.0	RL=10kΩ fIN=1kHz	—	0.05	—	—	—	%
-3dB Band Width		50pF	3.0	RL=600Ω $20\log_{10} \frac{V_{OUT}}{V_{IN}} = -3\text{dB}$	—	200	—	—	—	MHz
Feed Through (Switch-off)		50pF	3.0	RL=600Ω	—	-60	—	—	—	dB
Cross Talk (Control Switch)	50pF	2.0	RL=600Ω fCONT=1MHz	—	60	—	—	—	—	mV
		3.0		—	100	—	—	—	—	
		4.5		—	150	—	—	—	—	
Cross Talk (between Switches)	50pF	2.0	RL=600Ω fIN=1MHz	—	-60	—	—	—	—	dB
		3.0		—	-60	—	—	—	—	
		4.5		—	-60	—	—	—	—	
Control Input Capacitance	CCONT	—	—		—	5	10	—	10	pF
Switch Input/Output Capacitance	CIN/OUT	—	—		—	6	—	—	—	pF
Feed Through Capacitance	CIN-OUT	—	—		—	0.5	—	—	—	pF
Power Dissipation Capacitance	Cpd	—	—		—	13	—	—	—	pF


■ON Resistance

■Typical Application Circuit

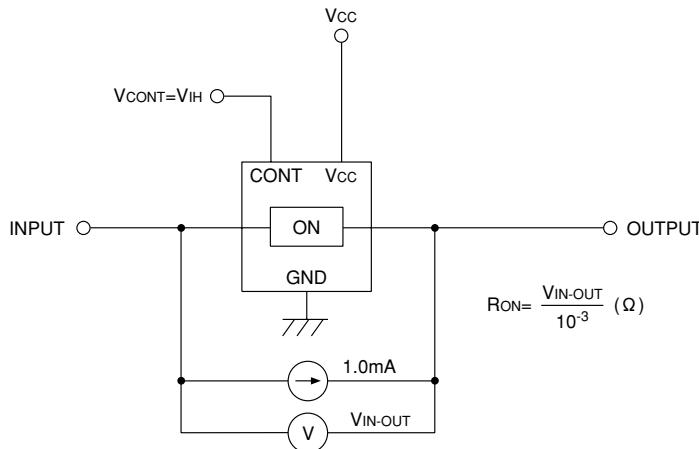


$$R_{ON} = \frac{V_{IN-OUT}}{10^{-3}} (\Omega)$$


■Voltage Dependancies of ON Resistance

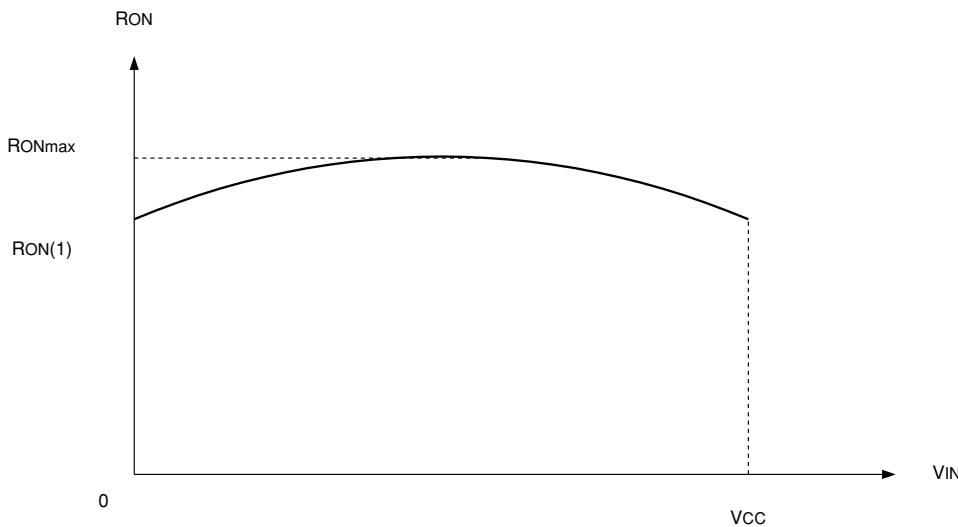

■ Power Off Leakage Current

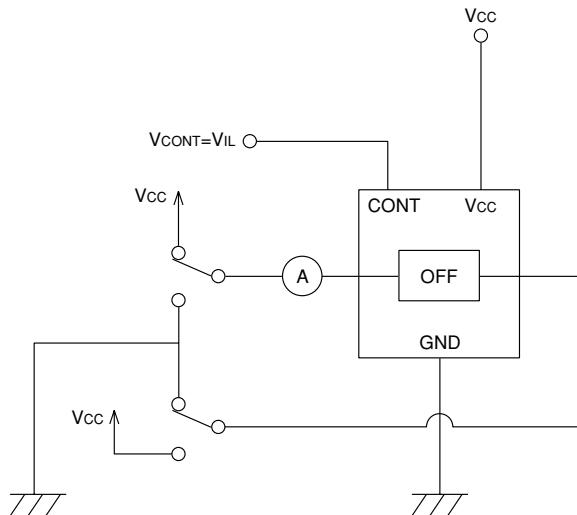


■ Power On Leakage Current

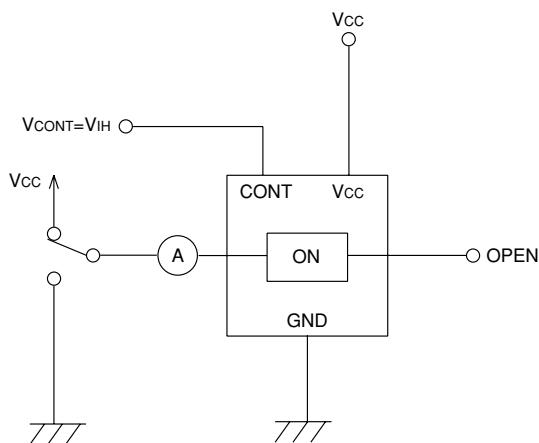


■ Propagation Delay Time

■ Typical Application Circuit

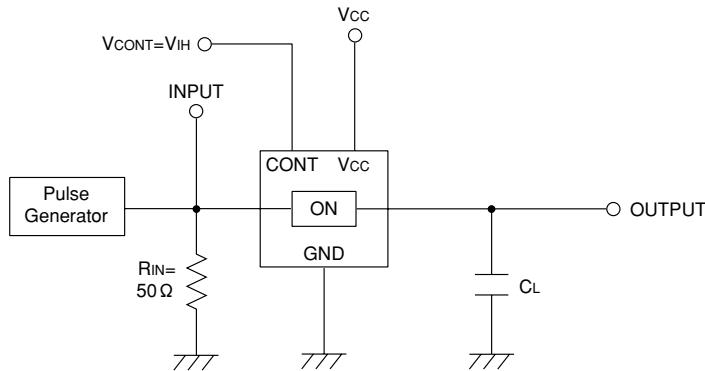


■ Waveforms

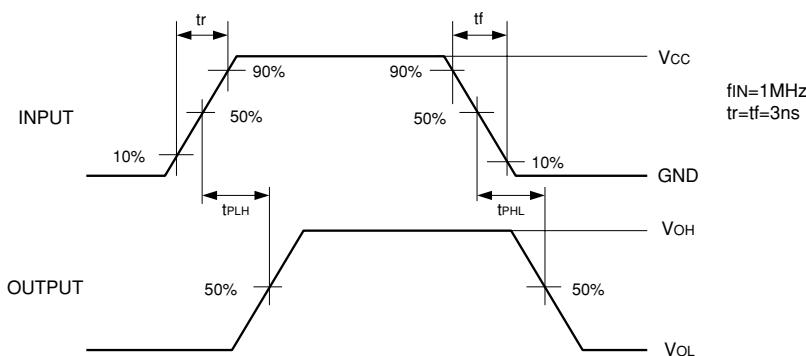


■Output Enable Time, Output Disable Time


■Typical Application Circuit

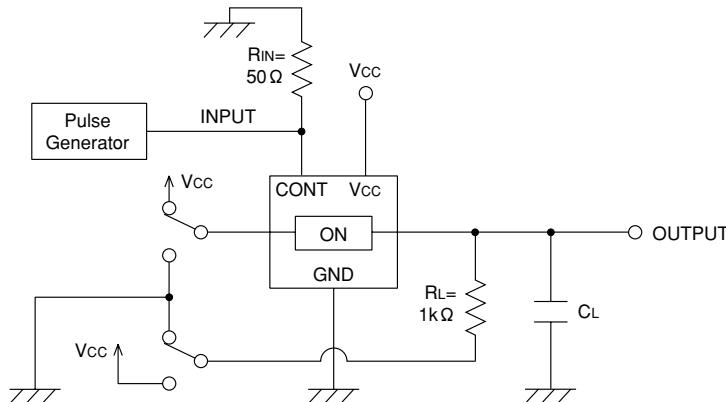

■Waveforms

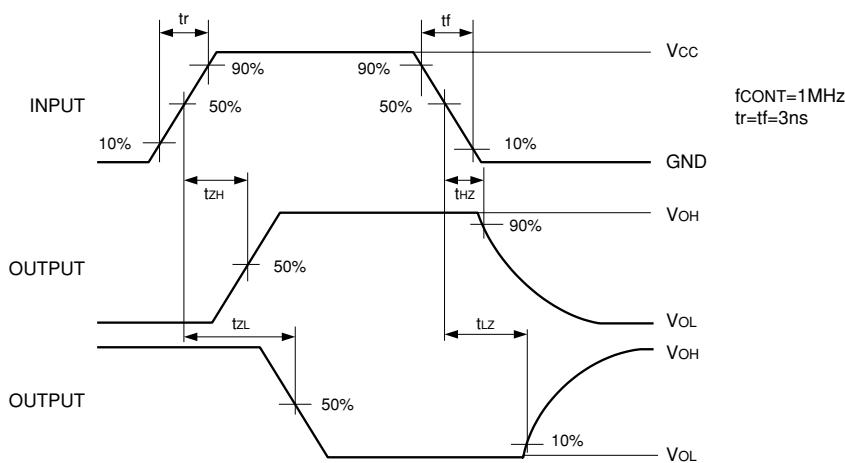


■ Sine Wave Distortion Rate

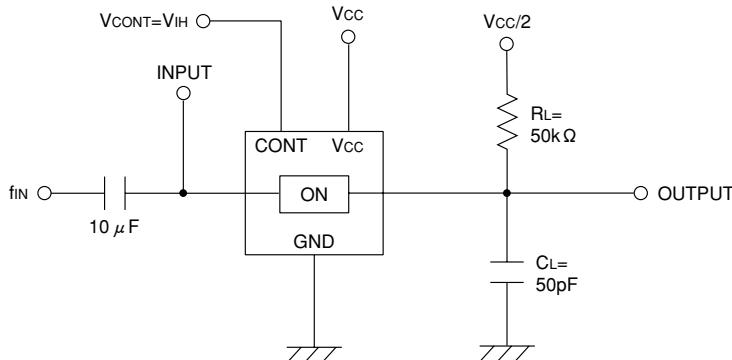


* Input by sine wave

■ -3dB Band Width

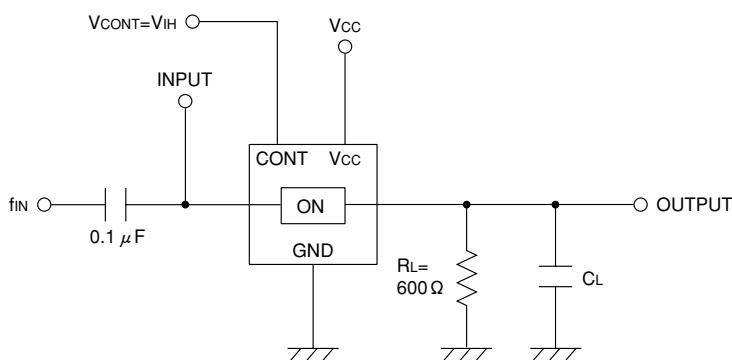

* Input by sine wave ($V_{IN}=0dBm$, $f=1MHz$)


■Feed Through Test Circuit

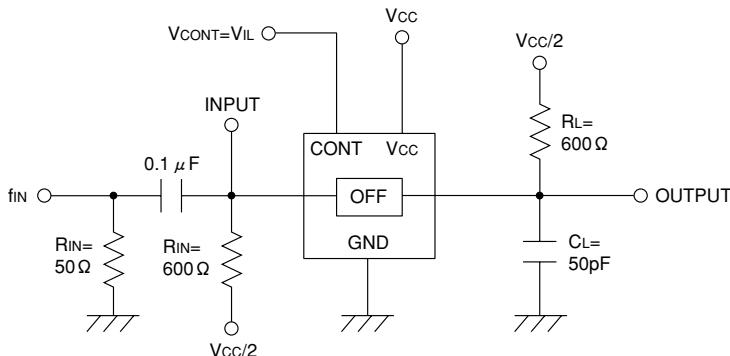


* Input by sine wave ($V_{IN}=0\text{dBm}$, $f=1\text{MHz}$)

■Cross Talk (Control Input → Switch Output)

■Typical Application Circuit


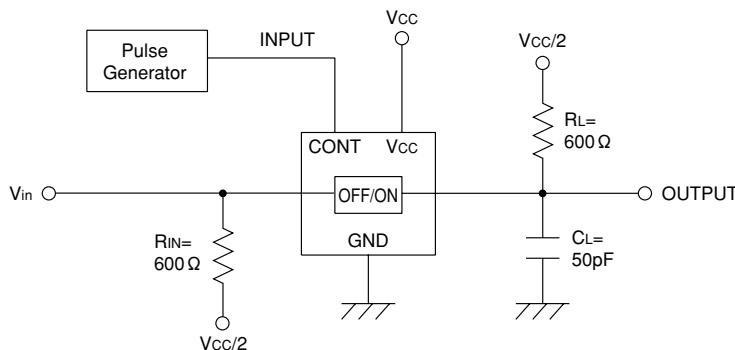


■Waveforms

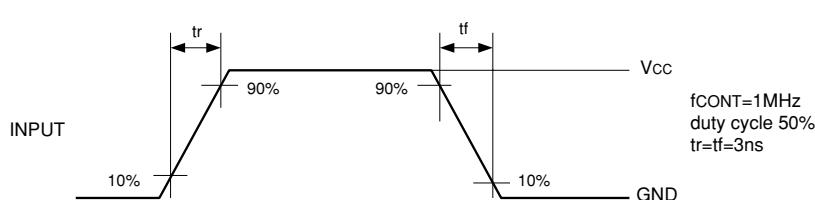

■ Cross Talk (between Switches)

■ Typical Application Circuits

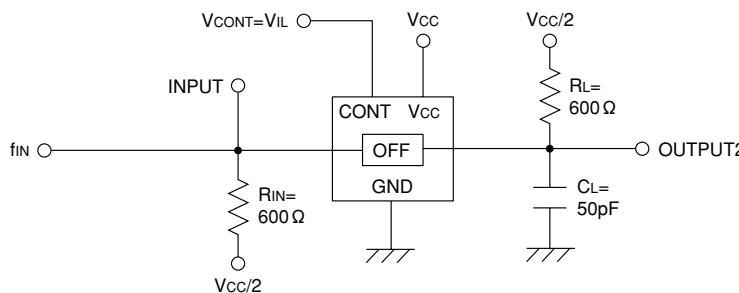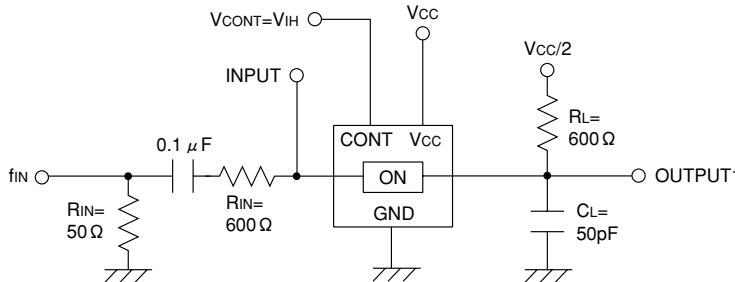

■ Waveforms

