

YOU DA INTEGRATED CIRCUIT

YD6651

MOTOR CONTROL CIRCUIT—YD6651


DESCRIPTION

The YD6651 is an IC designed for the rotating speed control of a compact DC motor that is used for a tape recorder, record player, etc.

FEATURES

- *Small four-lead plastic package for compact motor;
- *Fewer external parts;
- *Stable low reference voltage (1.0V typ.), wide motor speed setting
- *Highly stable operation over a wide range of supply voltage and torque supply voltage, $V_{cc}=3.5\sim 14.4V$;
- *Reverse voltage protection circuit is built-in.

BLOCK DIAGRAM

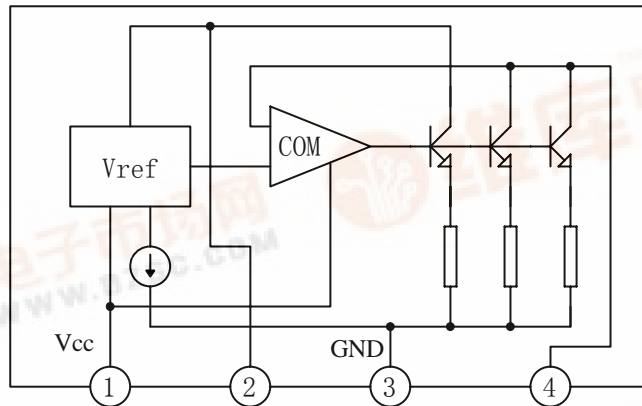

| | | | | |
|--------|-----|-----|-----|-----|
| NO. | 1 | 2 | 3 | 4 |
| SYMBOL | Vcc | CON | GND | OUT |

WuXi YouDa Electronics Co., Ltd

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China

Tel: 86-510-85205117 86-510-85205106 Fax: 86-510-85205110 Website: www.e-youda.com

SHENZHEN OFFICE Tel: 86-755-83740369 Fax: 86-755-83741418



ABSOLUTE MAXIMUM RATINGS (Tamb=25°C)

| PARAMETER | SYMBOL | VALUE | UNIT |
|-----------------------|-------------------------|----------|------|
| Supply Voltage | V _{CC} | 14.4 | V |
| Supply current | I _{CC} (Note1) | 2 | A |
| Power Dissipation | P _D (Note 2) | 0.9 | W |
| | P _D (Note 3) | 1.3 | |
| Operating Temperature | T _{opr} | -20~+75 | °C |
| Storage Temperature | T _{stg} | -40~+150 | °C |

Note 1: t ≤ 5 Second

Note 2: No radiator fin

Note 3: With a 10×10mm² bakelite printed circuit board


ELECTRICAL CHARACTERISTICS

(Tamb=25°C, V_{CC}=6V, Unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------|---|---|------|-------|------|------|
| Reference Voltage | V _{ref} | V _{CC} =6V, R _M =1k Ω | 0.85 | 1.0 | 1.15 | V |
| Bias Current | I _{BIAS} | V _{CC} =6V | | 0.8 | 1.8 | mA |
| Current Proportional Constant | K | V _{CC} =6V, I ₄ =40mA | 35 | 40 | 45 | |
| Saturation Voltage | V _{sat} | V _{CC} =4.2V, R _M =5.0 Ω | | 1.15 | 2 | V |
| Voltage Characteristics (1) | $\frac{\Delta V_{ref}}{V_{ref}} / V_{CC}$ | V _{CC} =3.5V~14V R _M =1k Ω | | -0.1 | | %/V |
| Voltage Characteristics (2) | $\frac{\Delta K}{K} / V_{CC}$ | V _{CC} =3.5V~14V I ₄ =40mA | | 0.2 | | %/V |
| Current Characteristics (1) | $\frac{\Delta V_{ref}}{V_{ref}} / I_4$ | I ₄ =50mA~200mA | | -0.02 | | %/mA |
| Current Characteristics (2) | $\frac{\Delta K}{K} / I_4$ | I ₄ =50mA~200mA | | -0.01 | | %/mA |
| Temperature Characteristics (1) | $\frac{\Delta V_{ref}}{V_{ref}} / T_a$ | T _a =-20°C ~+75°C V _{CC} =6V, R _M =1k Ω | | 0.01 | | %/°C |
| Temperature Characteristics (2) | $\frac{\Delta K}{K} / T_a$ | T _a =-20°C ~+75°C I ₄ =40mA | | 0.01 | | %/°C |

APPLICATION CIRCUIT

$R_r < R_m \times 40$

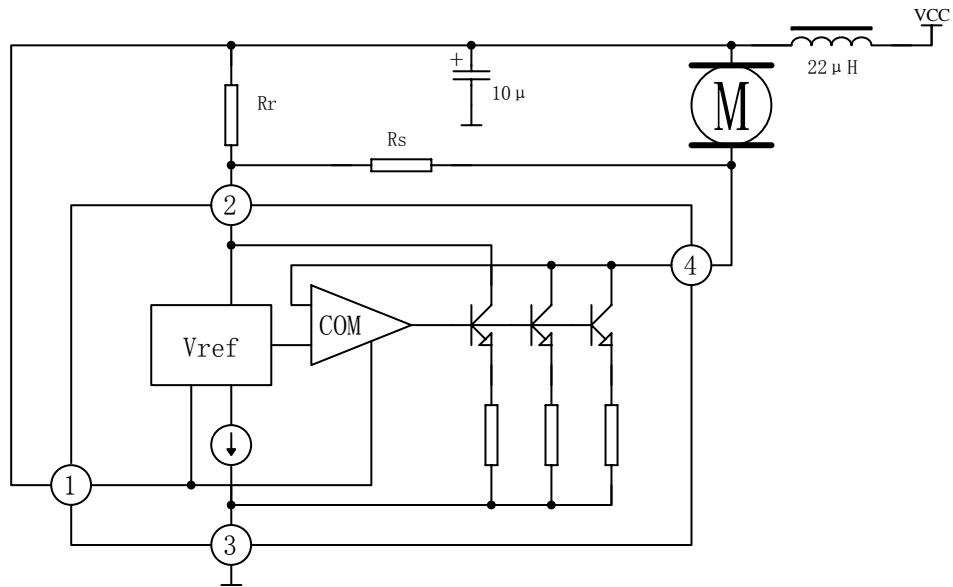

OUTLINE DRAWING

