

Coaxial

查询ZA4PD-2供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

Power Splitter/Combiner

ZA4PD-2+ ZA4PD-2

4 Way-0° 50Ω 1000 to 2000 MHz




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.375W max.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

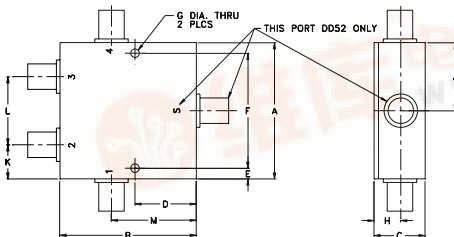

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.00	2.00	.75	.90	.156	1.688	.125
50.80	50.80	19.05	22.86	3.96	42.88	3.18
H	J	K	L	M		wt
.38	1.00	.50	1.00	1.25		grams
9.65	25.40	12.70	25.40	31.75		225.00

Features

- wideband, 1000 to 2000 MHz
- good isolation, 25 dB typ.
- up to 10W power input as splitter
- good VSWR, 1.20:1 typ.

Applications

- GPS
- communication systems

SMA version shown
CASE STYLE: DD52

Connectors	Model	Price	Qty.
SMA	ZA4PD-2-S(+)	\$89.95	(1-9)
N-TYPE	ZA4PD-2-N(+)	\$89.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min	Typ.	Max.	Max.	Max.
f_c - f_u						
1000-2000	25	16	0.3	1.0	6	0.7

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1000	6.24	6.27	6.27	6.25	0.03	27.53	39.12	27.62	1.90	1.56	1.21	1.29	1.29	1.20
1100	6.22	6.27	6.27	6.22	0.05	31.69	30.28	31.80	1.94	1.41	1.21	1.22	1.22	1.20
1150	6.23	6.31	6.31	6.22	0.09	32.16	29.02	32.26	1.75	1.33	1.21	1.19	1.19	1.20
1200	6.23	6.27	6.27	6.23	0.04	31.48	28.57	31.60	1.87	1.26	1.21	1.16	1.16	1.20
1300	6.28	6.30	6.29	6.27	0.03	29.21	29.81	29.31	1.80	1.13	1.21	1.12	1.12	1.20
1400	6.35	6.32	6.32	6.35	0.03	27.14	34.29	27.23	1.85	1.11	1.21	1.11	1.11	1.21
1450	6.40	6.34	6.34	6.40	0.06	26.20	38.20	26.28	1.94	1.16	1.21	1.11	1.11	1.21
1500	6.43	6.35	6.35	6.44	0.09	25.20	40.24	25.27	1.97	1.21	1.21	1.11	1.11	1.21
1600	6.47	6.33	6.33	6.47	0.14	23.35	32.69	23.40	2.24	1.31	1.21	1.10	1.10	1.21
1700	6.46	6.27	6.28	6.46	0.19	22.16	28.53	22.21	2.63	1.39	1.21	1.06	1.07	1.21
1750	6.38	6.24	6.25	6.38	0.14	21.95	27.42	21.95	3.03	1.42	1.20	1.05	1.05	1.21
1800	6.40	6.20	6.21	6.40	0.20	21.97	26.70	22.00	3.00	1.44	1.20	1.03	1.04	1.21
1900	6.32	6.13	6.13	6.31	0.19	22.90	26.38	22.87	3.10	1.44	1.18	1.09	1.08	1.19
1950	6.33	6.16	6.16	6.32	0.17	24.05	27.01	23.98	3.27	1.44	1.17	1.14	1.13	1.18
2000	6.35	6.13	6.12	6.32	0.23	25.87	28.42	25.77	3.05	1.44	1.15	1.19	1.18	1.16

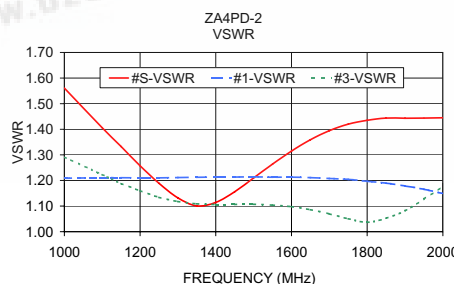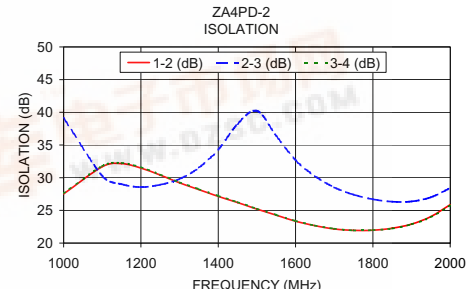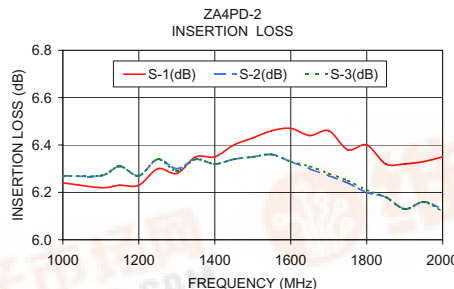

electrical schematic



Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. A
M107407
ZA4PD-2