



Certificate Number: Q10561

Certificate Number: E17276

1SMC 5.0 ~ 188A

Stand-off Voltage : 5.0 to 188V

Peak Pulse Power : 1500 W

FEATURES :

- * 1500W surge capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time : typically less than 1.0 ps from 0 volt to $V_{BR(min.)}$
- * Typical I_R less than $1\mu A$ above 10V
- * **Pb / RoHS Free**

MECHANICAL DATA

- * Case : SMC Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end except Bipolar.
- * Mounting position : Any
- * Weight : 0.21 gram

DEVICES FOR BIPOLAR APPLICATIONS

For Bi-directional use C or CA Suffix
Electrical characteristics apply in both directions

MAXIMUM RATINGS


Rating at 25°C ambient temperature unless otherwise specified

Rating	Symbol	Value	Unit
Peak Pulse Power Dissipation ^{(1) (2)}	P _{PPM}	Minimum 1500	W
Peak Forward Surge Current per Fig. 5 ⁽²⁾	I _{FSM}	200	A
Peak Pulse Current on 10/1000µs waveform ⁽¹⁾	I _{PPM}	See Next Table	A
Typical Thermal Resistance , Junction to Ambient ⁽³⁾	R _{θJA}	75	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	- 55 to + 150	°C

Notes :

- (1) Non-repetitive Current pulse per Fig. 3 and derated above $T_a = 25^\circ C$ per Fig. 1
- (2) Mounted on 0.31x 0.31" (8.0 x 8.0mm) copper pads to each terminal.
- (3) Mounted on minimum recommended pad layout

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

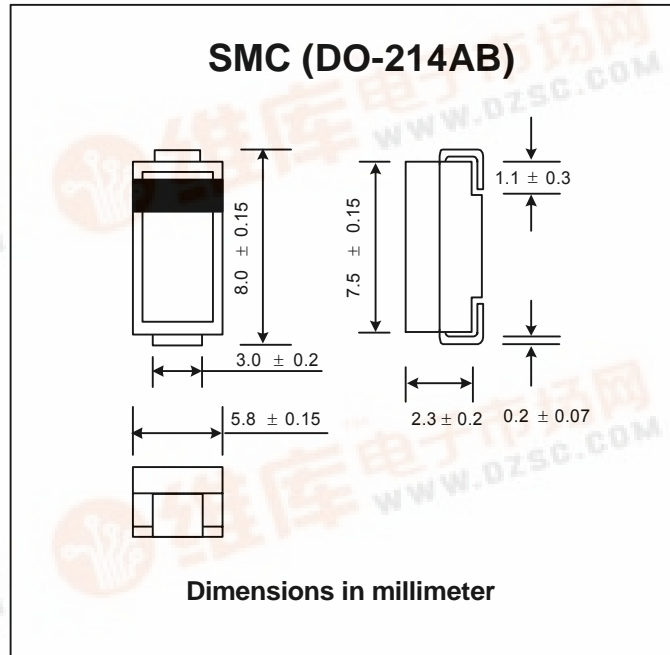



Certificate Number: Q10561

Certificate Number: E17276

ELECTRICAL CHARACTERISTICS (Rating at 25°C ambient temperature unless otherwise specified)

Type No.	Breakdown Voltage @ $T^{(1)}$		Working Peak Reverse Voltage	Maximum Reverse Leakage @ V_{WM}	Maximum Peak Pulse Surge Current	Maximum Clamping Voltage @ I_{PPM}
	V_{BR} (V)		I_T	V_{WM}	I_D	I_{PPM}
	Min.	Max.	(mA)	(V)	(μ A)	(A)
1SMC5.0A	6.40	7.07	10	5.0	1000	163.0
1SMC6.0A	6.67	7.37	10	6.0	1000	145.6
1SMC6.5A	7.22	7.98	10	6.5	500	133.9
1SMC7.0A	7.78	8.6	10	7.0	200	125.0
1SMC7.5A	8.33	9.21	1.0	7.5	100	116.3
1SMC8.0A	8.89	9.83	1.0	8.0	50	110.3
1SMC8.5A	9.44	10.4	1.0	8.5	20	104.2
1SMC9.0A	10.0	11.1	1.0	9.0	10	97.4
1SMC10A	11.1	12.3	1.0	10	5.0	88.2
1SMC11A	12.2	13.5	1.0	11	5.0	82.4
1SMC12A	13.3	14.7	1.0	12	5.0	75.4
1SMC13A	14.4	15.9	1.0	13	5.0	69.8
1SMC14A	15.6	17.2	1.0	14	5.0	64.7
1SMC15A	16.7	18.5	1.0	15	5.0	61.5
1SMC16A	17.8	19.7	1.0	16	5.0	57.7
1SMC17A	18.9	20.9	1.0	17	5.0	54.3
1SMC18A	20.0	22.1	1.0	18	5.0	51.4
1SMC20A	22.2	24.5	1.0	20	5.0	46.3
1SMC22A	24.4	26.9	1.0	22	5.0	42.3
1SMC24A	26.7	29.5	1.0	24	5.0	38.6
1SMC26A	28.9	31.9	1.0	26	5.0	35.6
1SMC28A	31.1	34.4	1.0	28	5.0	33.0
1SMC30A	33.3	36.8	1.0	30	5.0	31.0
1SMC33A	36.7	40.6	1.0	33	5.0	28.1
1SMC36A	40.0	44.2	1.0	36	5.0	25.8
1SMC40A	44.4	49.1	1.0	40	5.0	23.3
1SMC43A	47.8	52.8	1.0	43	5.0	21.6
1SMC45A	50.0	55.3	1.0	45	5.0	20.6
1SMC48A	53.3	58.9	1.0	48	5.0	19.4
1SMC51A	56.7	62.7	1.0	51	5.0	18.2
1SMC54A	60.0	66.3	1.0	54	5.0	17.2
1SMC58A	64.4	71.2	1.0	58	5.0	16.0
1SMC60A	66.7	73.7	1.0	60	5.0	15.5
1SMC64A	71.1	78.6	1.0	64	5.0	14.6
1SMC70A	77.8	86	1.0	70	5.0	13.3
1SMC75A	83.3	92.1	1.0	75	5.0	12.4
1SMC78A	86.7	95.8	1.0	78	5.0	11.9
1SMC85A	94.4	104	1.0	85	5.0	10.9
1SMC90A	100	111	1.0	90	5.0	10.3
1SMC100A	111	123	1.0	100	5.0	9.3
1SMC110A	122	135	1.0	110	5.0	8.5
1SMC120A	133	147	1.0	120	5.0	7.8
1SMC130A	144	159	1.0	130	5.0	7.2
1SMC150A	167	185	1.0	150	5.0	6.2
1SMC160A	178	197	1.0	160	5.0	5.8
1SMC170A	189	209	1.0	170	5.0	5.50
1SMC188A	209	231	1.0	188	5.0	4.60

Notes :

- (1) Pulse test : $t_p \leq 50ms$.
- (2) Surge Current Waveform per Figure 5 and Derate per Figure
- (3) For bi-directional types have V_{WM} of 10 Volts and less , the I_D limit is double
- (4) For the bi-directional 1SMC5.0CA, the maximum V_{BR} is 7.25V
- (5) "1SMC" will be omitted in marking on the diode

RATING AND CHARACTERISTIC CURVES (1SMC5.0 - 1SMC188A)

FIG.1 - PULSE DERATING CURVE

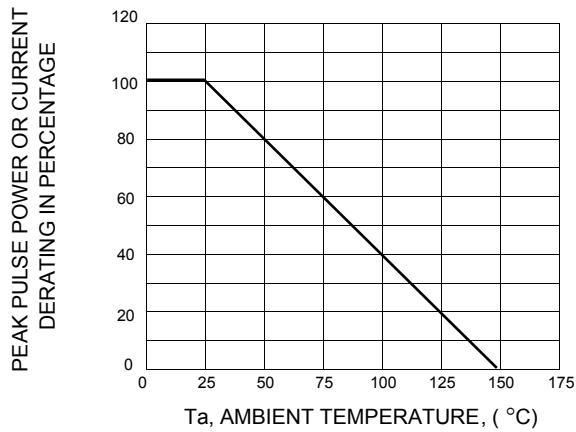


FIG.2 - TYPICAL JUNCTION CAPACITANCE

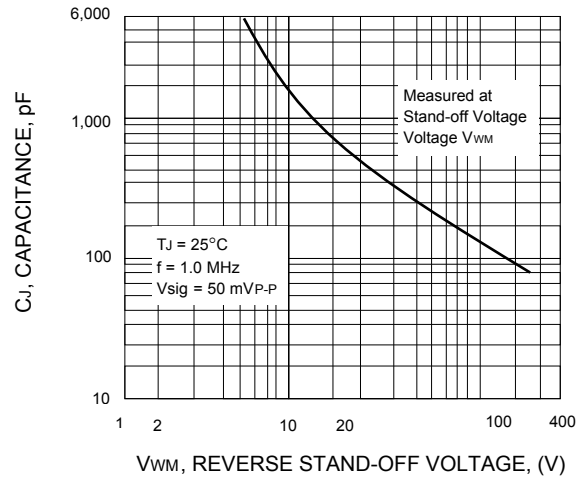


FIG.3 - PULSE WAVEFORM

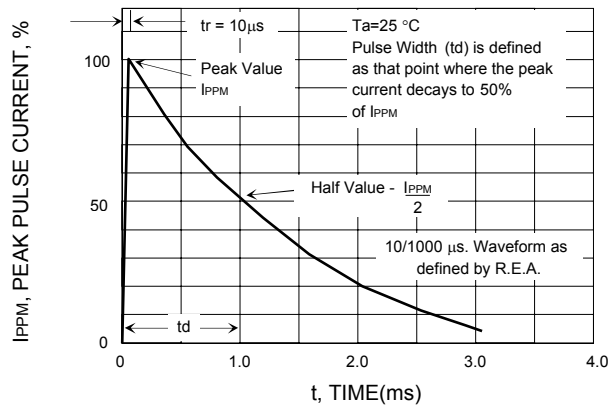


FIG.4 - PEAK PULSE POWER RATING CURVE

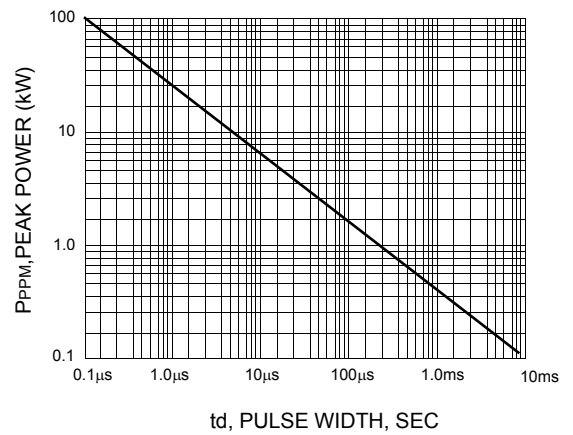


FIG.5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

