




Bulk Metal® Foil Technology Precision Trimming Potentiometers, 1/4 Inch Square, RJ26 Style, Designed to Meet or Exceed the Requirements of MIL-PRF-39035, Char. H

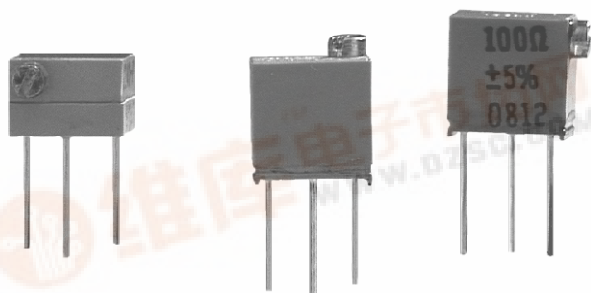

FEATURES

- Temperature coefficient of resistance (TCR): ± 10 ppm/°C. (- 55 °C to + 150 °C ref. at + 25 °C); through the wiper³⁾; ± 25 ppm/°C (see table 2 for low values)
- Load life stability: 0.1 % typical ΔR , 1.0 % maximum ΔR under full rated power at + 85 °C for 10 000 h
- Settability: 0.05 % typical; 0.1 % maximum
- Setting stability: 0.1 % typical; 0.5 % maximum, ΔSS
- Power rating: 0.25 W at + 85 °C
- Resistance range: 5 Ω to 10 k Ω



RoHS
COMPLIANT

TABLE 1 - MODEL SELECTION*

MODEL	TERMINATION STYLE	AVERAGE WEIGHT (g)	POWER RATING at + 85 °C AMBIENT	NO. OF TURNS
1240	W-edge mount, top adjust	0.4	0.25 W	21 \pm 2
	X-edge mount, side adjust			
	P-horizontal mount, side adjust			

Note:

* See Figure 1, next page

**TABLE 2 - 1240 (RJ26) SERIES
ELECTRICAL SPECIFICATIONS**

Temperature Coefficient of Resistance (TCR) 50 Ω to 10K End-to-end ²⁾	± 10 ppm/°C maximum (- 55 °C to + 150 °C, + 25 °C ref.)
Temperature Coefficient of Resistance 5, 10 and 20 Ω Through the wiper ³⁾	± 20 ppm/°C ± 25 ppm/°C
Stability Load life at 10 000 h	0.1 % typical ΔR 1.0 % maximum ΔR (under full rated power of 0.25 W at + 85 °C)
Power Rating⁴⁾	0.25 W at + 85 °C
Settability	0.05 % typical; 0.1 % maximum
Setting Stability	0.1 % typical; 0.5 % maximum
Contact Resistance Variation - CRV (noise) ⁵⁾	3 Ω typical; 10 Ω maximum
Hop-off	0.25 % typical; 1.0 % maximum
High-Frequency Operation Rise time Inductance Capacitance	1.0 ns without ringing 0.08 μ H typical 0.5 pF typical
Operating Temperature Range	- 55 °C to + 150 °C

TABLE 3 - VALUES VS. TOLERANCES

STANDARD RESISTANCE VALUES (in Ω)	STANDARD TOLERANCE
5, 10	± 10 %
20, 50, 100, 200, 500, 1K, 2K, 5K, 10K	± 5 %

TABLE 4 - MECHANICAL SPECIFICATIONS

Adjustment Turns	21 \pm 2
Mechanical Stops	Wiper idles - no discontinuity
Internal Terminations	All welded - no flux
Case Material	1240X - diallyl-phthalate: green (DAP) 1240W - diallyl-phthalate: green (DAP) 1240P - thermoplastic: black
Shaft Torque	3 oz. in. maximum
Backlash	0.005 % typical



1240


Vishay Foil Resistors

Bulk Metal® Foil Technology Precision Trimming
Potentiometers, 1/4 Inch Square, RJ26 Style, Designed to
Meet or Exceed the Requirements of MIL-PRF-39035, Char. H




FIGURE 1 - SCHEMATIC AND DIMENSIONS in inches (millimeters)


1240X

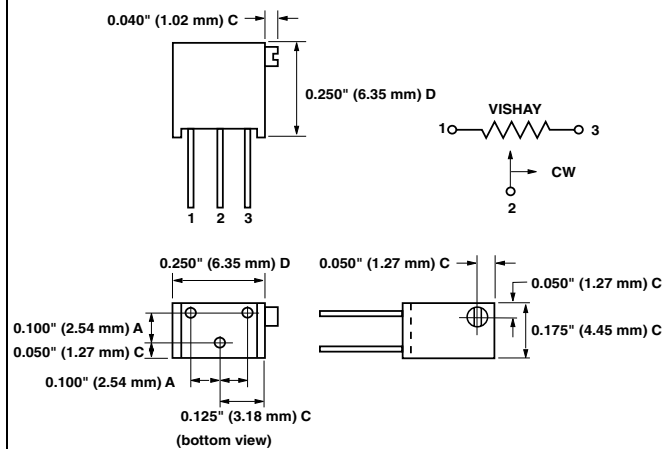

1240W

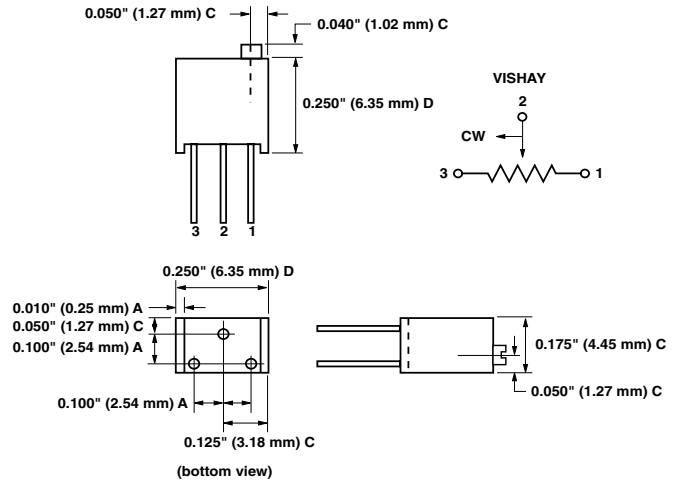

1240P

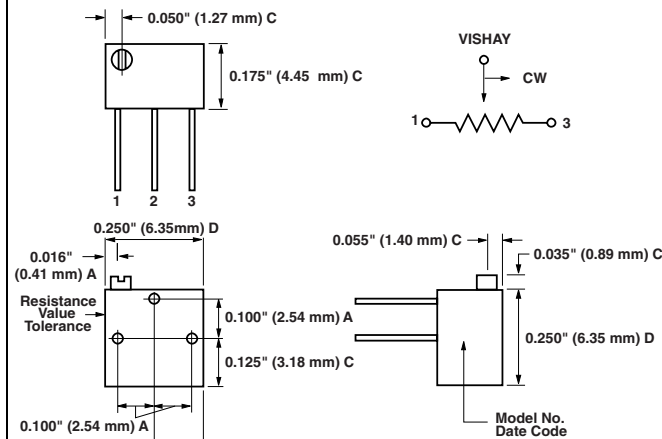

TOLERANCES:

A = ± 0.005 " (0.13 mm)
C = ± 0.010 " (0.25 mm)
D = ± 0.020 " (0.51 mm)

STANDARD MARKING:

Model No.
Date Code
Resistance Value
Tolerance

Notes:

Adjustment screw 0.080" (2.03 mm) diameter with 0.025" (0.64 mm) X 0.030" (0.76 mm) slot. Tolerance on screw dimensions is ± 0.005 " (0.13 mm). Model 1240 has gold plated terminal pins 0.016" (0.41 mm) ± 0.001 " (0.03 mm) diameter, 0.200" (5.08 mm) length minimum.

FIGURE 2 - POWER DERATING CURVE


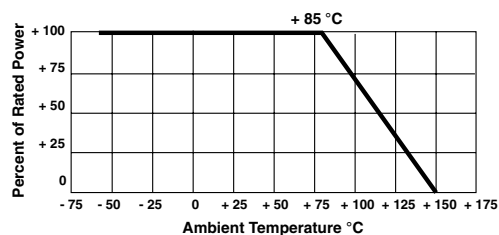


FIGURE 3 - 1240W 10 kΩ LOAD LIFE, 20 UNITS, 10 000 h at 0.25 W, + 85 °C (wiper at CW)



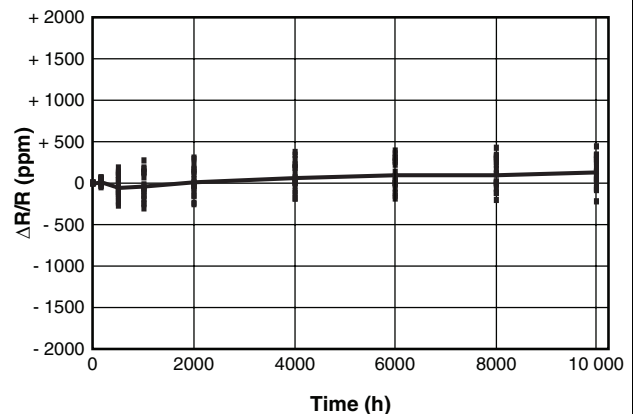

Bulk Metal® Foil Technology Precision Trimming
Potentiometers, 1/4 Inch Square, RJ26 Style, Designed to
Meet or Exceed the Requirements of MIL-PRF-39035, Char. H

Vishay Foil Resistors

TABLE 5 - COMPARISON

	MIL-PRF-39035/3 CHARACTERISTIC H ⁶⁾	MODEL 1240 MAXIMUM
TEST GROUP I Conditioning Contact resistance variation - CRV (noise) Immersion	$\pm 1.0 \%$ $\pm 3.0 \%$ or $3 \Omega^7)$ No continuous stream of bubbles	$\pm 0.5 \%$ 3 Ω typical, 10 Ω maximum No continuous stream of bubbles
TEST GROUP I a Visual and mechanical Actual effective electrical travel End resistance Dielectric withstanding voltage - DWV (atmospheric and barometric pressure) Insulation resistance Shaft torque Thermal shock Setting stability	No failures 10 to 25 turns 2 % or $2 \Omega^7)$ Per MIL-STD-202, methods 301 and 105 $\geq 1000 M\Omega$ 3 oz. in. maximum $\pm 1.0 \%$ $\pm 1.0 \%$	No failures 21 ± 2 turns 2 Ω for values $\leq 1 k\Omega$; 5 Ω for values $\geq 2 k\Omega$; Per MIL-STD-202, methods 301 and 105 $> 1000 M\Omega$ 3 oz. in. maximum $\pm 0.5 \%$ $\pm 0.5 \%$
TEST GROUP II Solderability	Per MIL-STD-202, method 208	Per MIL-STD-202, method 208
TEST GROUP III Resistance temperature characteristic - TCR Moisture resistance Contact resistance variation - CRV (noise)	$\pm 0.005 \%$ ($\pm 50 \text{ ppm}/^\circ\text{C}$) $\pm 1.0 \%$ 3.0 % or $3 \Omega^7)$	$\pm 0.001 \%$ ($\pm 10 \text{ ppm}/^\circ\text{C}$) $\pm 0.5 \%$ 3 Ω typical, 10 Ω maximum
TEST GROUP IV Settability Shock Setting stability Vibration Setting stability Contact resistance variation - CRV (noise) Salt spray	$\pm 1.0 \%$ $\pm 1.0 \%$ $\pm 1.0 \%$ $\pm 1.0 \%$ $\pm 1.0 \%$ $\pm 1.0 \%$ 3.0 % or $3 \Omega^7)$ No corrosion	$\pm 0.1 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ 3 Ω typical, 10 Ω maximum No corrosion
TEST GROUP V Solder heat Low-temperature operation Setting stability Low-temperature storage High-temperature exposure Setting stability Contact resistance variation - CRV (noise) Integrity of shaft	$\pm 1.0 \%$ $\pm 1.0 \%$ $\pm 2.0 \%$ $\pm 1.0 \%$ $\pm 3.0 \%$ $\pm 2.0 \%$ 3 % or $3 \Omega^7)$ No loosening or breakage	$\pm 0.1 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ $\pm 0.5 \%$ 3 Ω typical, 10 Ω maximum No loosening or breakage
TEST GROUP VI Rotational life (200 cycles) Contact resistance variation - CRV (noise) Terminal strength	$\pm 2.0 \%$ 3 % or $3 \Omega^7)$ 2 lbs.	$\pm 2.0 \%$ 3 Ω typical, 10 Ω maximum 2 lbs.
TEST GROUP VII Life (2000 h) at + 85 $^\circ\text{C}$ Life (10 000 h) at + 85 $^\circ\text{C}$	$\pm 3.0 \%$ $\pm 5.0 \%$	$\pm 0.1 \%$ typical, $\pm 1.0 \%$ maximum $\pm 0.1 \%$ typical, $\pm 1.0 \%$ maximum
TEST GROUP VIII Solvent resistance	No failures	No failures

Notes:

- Maximum is 1.0 % A.Q.L. standard for all specifications except TCR. (For TCR information, see notes 2 and 3.)
- Maximum TCR applies to the 3 σ (sigma) limit or 99.73 % of a production lot. (Measured end-to-end with wiper off the element.)
- Measurements of TCR through the wiper are influenced more by setting stability and the percentage of the total resistance in use (at the wiper) than by fundamental resistance change due to temperature alone. The parameter shown in Table 2 is a 2 s distribution typifying the behavior of the device when used with 40 % or more of the total resistance in use.
- Derated linearly for full power at + 85 $^\circ\text{C}$ to zero (0) W at + 150 $^\circ\text{C}$. See Figure 2 on previous page.
- Independent of resistance value. 3 W maximum available on special request.
- All ΔR 's are measured to the tolerance specified + 0.01 Ω .
- Whichever is greater.
Special Available Options:
Special marking
Burn-in and screening operations.

VISHAY TRIMMERS ARE INSPECTED


100 % for:

- Short-time overload
(6.25 x rated power for 5 s on; and for 30 s off - 3 cycles)
- Immersion
- Resistance tolerance check
- End resistance
- Visual-mechanical
- Dynamic tests for continuity, CRV

By sample for:

- TCR
- DWV

Vishay Foil Resistors Bulk Metal® Foil Technology Precision Trimming
Potentiometers, 1/4 Inch Square, RJ26 Style, Designed to
Meet or Exceed the Requirements of MIL-PRF-39035, Char. H

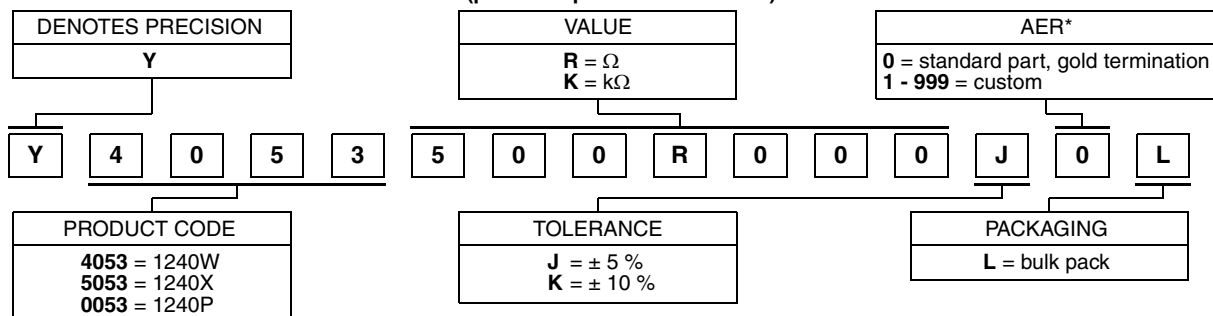TABLE 6 - GLOBAL PART NUMBER INFORMATION
NEW GLOBAL PART NUMBER: Y4053500R000J0L (preferred part number format)


FOR EXAMPLE: ABOVE GLOBAL ORDER Y4053 500R000 J 0 L:


TYPE: 1240W

VALUE: 500.0 Ω

ABSOLUTE TOLERANCE: $\pm 5.0\%$

AER: standard part, gold termination

PACKAGING: bulk pack

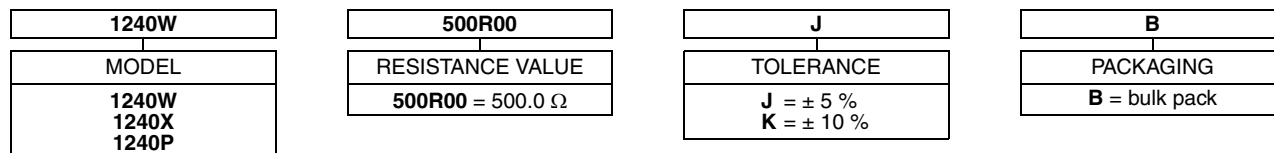HISTORICAL PART NUMBER: 1240W 500R00 J B (will continue to be used)

Note

* Application engineering release: for non-standard requests, please contact application engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.