


100 Series / SM Series / PC Series

Precision Wirewound Resistors

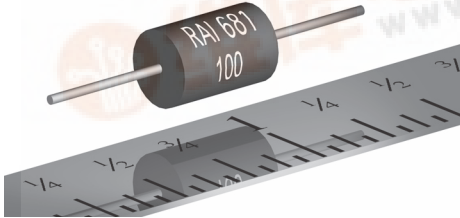

- Resistances to 25MOhms
- Resistance Tolerances to $\pm 0.005\%$
- Temperature Coefficients of ± 1 ppm/K
- Power Ratings to 2W
- 100% Acceptance Tested / Traceable to NIST
- Long Term Stability / 100ppm/year
- Matched Resistance Sets to $\pm 0.001\%$ and ± 0.5 ppm/K

SPECIFICATIONS



| Type | Commercial Wattage (Watts) | Maximum Ohms | Minimum Tolerance (%) | Dimensions | | | Maximum Working Voltage |
|-------|------------------------------|--------------|-------------------------|--|--------------------------------------|--|-------------------------|
| | | | | Diameter $\pm 0.005"$ [± 0.13 mm] | Length $\pm 0.025"$ [± 0.64 mm] | Lead Diameter ¹ $\pm 0.002"$ [± 0.05 mm] | |
| SM-2 | 0.06 | 75k | 0.005 | 0.100 [2.5] | 0.210 [5.3] | 0.020 [0.5] | 75 |
| SM-3 | 0.08 | 150k | | 0.125 [3.2] | 0.260 [6.6] | 0.020 [0.5] 0.025 [0.6] | 100 |
| SM-4 | 0.10 | 250k | | 0.125 [3.2] | 0.375 [9.5] | 0.020 [0.5] | 100 |
| SM-13 | 0.10 | 250k | | 0.156 [4.0] | 0.312 [7.9] | 0.020 [0.5] | 100 |
| SM-5 | 0.12 | 400k | | 0.187 [4.7] | 0.250 [6.4] | 0.025 [0.6] | 150 |
| SM-6 | 0.15 | 500k | | 0.187 [4.7] | 0.295 [7.5] | 0.025 [0.6] | 150 |
| 139A | 0.15 | 500k | | 0.250 [6.4] | 0.250 [6.4] | 0.025 [0.6] | 100 |
| SM-15 | 0.175 | 750k | | 0.187 [4.7] | 0.375 [9.5] | 0.025 [0.6] 0.020 [0.5] | 200 |
| SM-12 | 0.20 | 750k | | 0.187 [4.7] | 0.450 [11.4] | 0.025 [0.6] | 200 |
| 100 | 0.20 | 800k | | 0.250 [6.4] | 0.375 [9.5] | 0.032 [0.8] 0.025 [0.6] | 200 |
| SM-7 | 0.25 | 1M | | 0.210 [5.3] | 0.465 [11.8] | 0.025 [0.6] | 250 |
| 101 | 0.25 | 1.2M | | 0.250 [6.4] | 0.500 [12.7] | 0.032 [0.8] 0.025 [0.6] | 300 |
| 102 | 0.33 | 2.5M | | 0.250 [6.4] | 0.750 [19.1] | 0.032 [0.8] 0.025 [0.6] | 400 |
| 120 | 0.40 | 3.8M | | 0.375 [9.5] | 0.500 [12.7] | 0.032 [0.8] | 300 |
| 121 | 0.50 | 3.8M | | 0.375 [9.5] | 0.750 [19.1] | 0.032 [0.8] | 400 |
| 129 | 0.75 | 10M | | 0.375 [9.5] | 1.000 [25.4] | 0.032 [0.8] | 600 |
| 106 | 1.00 | 12M | | 0.500 [12.7] | 1.000 [25.4] | 0.032 [0.8] | 800 |
| 107 | 1.50 | 15M | | 0.500 [12.7] | 1.500 [38.1] | 0.032 [0.8] | 900 |
| 108 | 2.00 | 25M | 0.500 [12.7] | 2.000 [50.8] | 0.032 [0.8] | 1000 | |

¹ Where more than one lead is listed / the top value is Standard Lead Length = 1.50 [38] Min.

Ordering Information

Part Number - Resistance - Tolerance - TCR (If not standard)

Example: SM-6 25kOhms 0.1%

100 Series / SM Series / PC Series


Precision Wirewound Resistors



SPECIFICATIONS (continued)

PC Series

| Type | Commercial Wattage (Watts) | Maximum Ohms | Minimum Tolerance (%) | Dimensions | | | | Maximum Working Voltage |
|-------|------------------------------|--------------|-------------------------|----------------------------------|--------------------------------|--|-------------------------------------|-------------------------|
| | | | | Diameter ±0.005" [±0.13mm] | Length ±0.025" [±0.64mm] | Lead Diameter ¹ ±0.002" [±0.05mm] | Lead Spacing ±0.015" [±0.4mm] | |
| 100PC | 0.125 | 500k | 0.005 | 0.250 [6.4] | 0.375 [9.5] | 0.025 [0.6] | 0.150 [3.8] | 150 |
| 130PC | 0.125 | 500k | | 0.250 [6.4] | 0.312 [7.9] | 0.025 [0.6] | 0.150 [3.8] | 150 |
| 131PC | 0.125 | 500k | | 0.250 [6.4] | 0.312 [7.9] | 0.025 [0.6] | 0.200 [5.1] | 150 |
| 101PC | 0.25 | 600k | | 0.250 [6.4] | 0.500 [12.7] | 0.025 [0.6] | 0.150 [3.8] | 150 |
| 120PC | 0.40 | 800k | | 0.375 [9.5] | 0.500 [12.7] | 0.032 [0.8] | 0.200 [5.1] | 300 |
| 104PC | 0.50 | 1M | | 0.500 [12.7] | 0.500 [12.7] | 0.032 [0.8] 0.025 [0.6] | 0.300 [7.6] | 400 |



¹ Where more than one lead is listed / the top value is Standard
Lead Length = 1.00 [25] Min.

Rectangular Series


| Type | Commercial Wattage (Watts) | Maximum Ohms | Dimensions | | | | | Maximum Working Voltage |
|--------|------------------------------|--------------|-------------------------------|--------------------------------|--------------------------------|--|-------------------------------------|-------------------------|
| | | | Width ±0.010" [±0.25mm] | Height ±0.025" [±0.64mm] | Length ±0.010" [±0.25mm] | Lead Diameter ¹ ±0.002" [±0.05mm] | Lead Spacing ±0.015" [±0.4mm] | |
| SM-8 | 0.125 | 500k | 0.140 [3.6] | 0.250 [6.4] | 0.270 [6.9] | 0.032 [0.8] | 0.125 [3.2] | 150 |
| SM-9 | 0.250 | 750k | 0.150 [3.8] | 0.270 [6.9] | 0.540 [13.7] | 0.032 [0.8] | 0.250 [6.4] | 150 |
| SP5086 | 0.300 | 500k | 0.102 [2.6] | 0.320 [8.1] | 0.300 [7.6] | 0.025 [0.6] | 0.150 [3.8] | 150 |
| SP5232 | 0.500 | 1M | 0.160 [4.1] | 0.525 [13.3] | 0.585 [14.9] | 0.032 [0.8] | 0.400 [10.2] | 150 |



¹ Lead Length = 1.00 [25] Min.

| Specification | Value |
|---|---|
| Tolerances | ±0.005% to ±1% (See Derating Curve) |
| Temperature Coefficient (Standard) (down to 1ppm on request) | >100Ω : ±10ppm/K 10Ω to 100Ω : ±20ppm/K <10Ω : ±30ppm/K |
| Temperature Range | -55°C to +145°C (See Derating Curve) |

Power Derating Curve

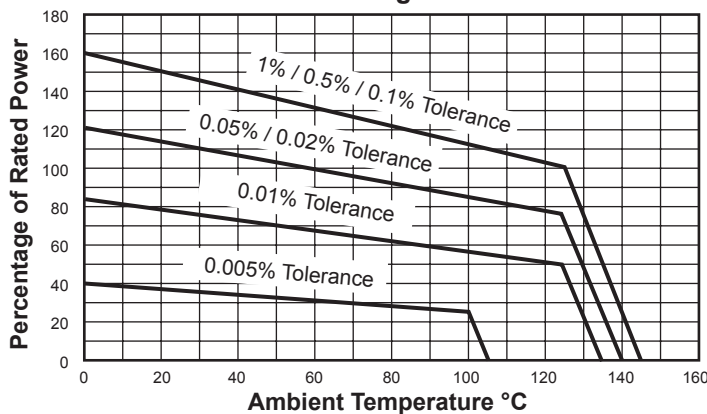

Notes: (Contact Factory for these options)

Fast Rise Time - These resistors are available in a low reactance design for fast rise time and extended frequency response.

High Stability - These resistors are available in a High Stability version with maximum resistance change of ±20ppm/year under normal conditions.

High TC - These resistors are available in High TC configurations. Standard TC's are +2600 / +3850 / +4500 / +5000 / and +6000 ppm/K.