


Series 1812

Unshielded Surface Mount Inductors

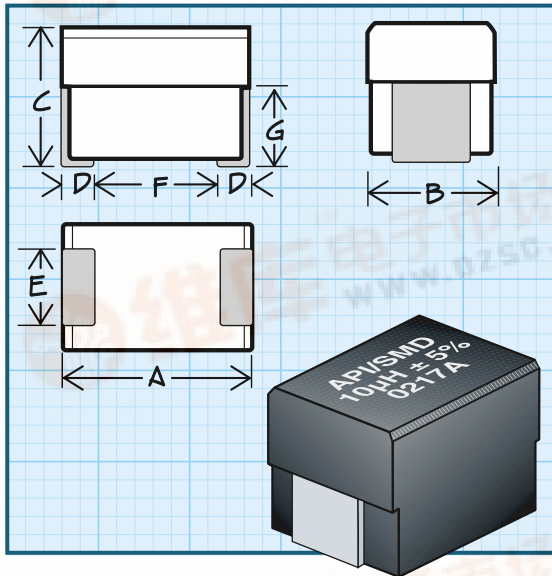

Physical Parameters

	Inches	Millimeters
A	0.166 to 0.190	4.22 to 4.83
B	0.118 to 0.134	3.00 to 3.40
C	0.118 to 0.134	3.00 to 3.40
D	0.015 Min.	0.38 Min.
E	0.054 to 0.078	1.37 to 1.98
F	0.118 (Ref. only)	3.00 (Ref. only)
G	0.066 (Ref. only)	1.68 (Ref. only)

Dimensions "A" and "C" are over terminals

Operating Temperature Range -55°C to +125°C

Current Rating at 90°C Ambient 35°C Rise

Maximum Power Dissipation at 90°C

Iron and Ferrite: 0.278 W

Phenolic: 0.210 W

* **Note** Self Resonant Frequency (SRF) values are calculated and for reference only.

Packaging Tape & reel (12mm): 7" reel, 650 pieces max.; 13" reel, 2500 pieces max.

Made In the U.S.A. Patent Protected

PART NUMBER	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz) *	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (mA)
SERIES 1812 PHENOLIC CORE							
1812-100M	0.010	±20%	40	50	1000*	0.10	1230
1812-120M	0.012	±20%	40	50	1000*	0.10	1230
1812-150M	0.015	±20%	40	50	1000*	0.10	1230
1812-180M	0.018	±20%	40	50	1000*	0.10	1230
1812-220M	0.022	±20%	40	50	1000*	0.10	1230
1812-270M	0.027	±20%	40	50	1000*	0.15	1000
1812-330M	0.033	±20%	40	50	1000*	0.15	1000
1812-390M	0.039	±20%	30	50	1000*	0.20	870
1812-470M	0.047	±20%	30	50	1000*	0.20	870
1812-560M	0.056	±20%	30	50	850*	0.25	770
1812-680M	0.068	±20%	25	50	750*	0.25	770
1812-820M	0.082	±20%	25	50	750*	0.25	700

PART NUMBER	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz) *	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (mA)
SERIES 1812 IRON CORE							
1812-101K	0.10	±10%	30	25	650	0.30	818
1812-121K	0.12	±10%	30	25	600	0.30	818
1812-151K	0.15	±10%	30	25	500	0.30	818
1812-181K	0.18	±10%	30	25	400	0.35	757
1812-221K	0.22	±10%	30	25	350	0.40	708
1812-271K	0.27	±10%	30	25	300	0.45	668
1812-331K	0.33	±10%	30	25	250	0.55	604
1812-391K	0.39	±10%	30	25	220	0.70	535
1812-471K	0.47	±10%	30	25	190	0.80	501
1812-561K	0.56	±10%	30	25	170	1.20	409
1812-681K	0.68	±10%	30	25	150	1.40	379
1812-821K	0.82	±10%	30	25	140	1.60	354



PART NUMBER	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz) *	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (mA)
SERIES 1812 FERRITE CORE							
1812-102J	1.0	±5%	50	7.9	100	0.50	634
1812-122J	1.2	±5%	50	7.9	80	0.55	604
1812-152J	1.5	±5%	50	7.9	70	0.60	578
1812-182J	1.8	±5%	50	7.9	60	0.65	556
1812-222J	2.2	±5%	50	7.9	55	0.70	535
1812-272J	2.7	±5%	50	7.9	50	0.75	517
1812-332J	3.3	±5%	50	7.9	45	0.80	501
1812-392J	3.9	±5%	50	7.9	40	0.90	472
1812-472J	4.7	±5%	50	7.9	35	1.00	448
1812-562J	5.6	±5%	50	7.9	33	1.10	427
1812-682J	6.8	±5%	50	7.9	27	1.20	409
1812-822J	8.2	±5%	50	7.9	25	1.40	375
1812-103J	10	±5%	50	7.9	20	1.60	354
1812-123J	12	±5%	50	2.5	18	2.00	317
1812-153J	15	±5%	50	2.5	17	2.50	283
1812-183J	18	±5%	50	2.5	15	2.80	268
1812-223J	22	±5%	50	2.5	13	3.20	250
1812-273J	27	±5%	50	2.5	12	3.60	236
1812-333J	33	±5%	50	2.5	11	4.00	224
1812-393J	39	±5%	50	2.5	10	4.50	211
1812-473J	47	±5%	50	2.5	10	5.00	200
1812-563J	56	±5%	50	2.5	9	5.50	191
1812-683J	68	±5%	50	2.5	9	6.00	183
1812-823J	82	±5%	50	2.5	8	7.00	169
1812-104J	100	±5%	50	2.5	8	8.00	158
1812-124J	120	±5%	40	0.79	6	8.0	158
1812-154J	150	±5%	40	0.79	6	9.0	149
1812-184J	180	±5%	40	0.79	5	9.5	145
1812-224J	220	±5%	40	0.79	4	10.0	142
1812-274J	270	±5%	40	0.79	4	12.0	129
1812-334J	330	±5%	40	0.79	3.5	14.0	120
1812-394J	390	±5%	40	0.79	3.0	20.0	100
1812-474J	470	±5%	40	0.79	3.0	26.0	88
1812-564J	560	±5%	30	0.79	3.0	30.0	82
1812-684J	680	±5%	30	0.79	3.0	30.0	82
1812-824J	820	±5%	30	0.79	2.5	45.0	67
1812-105J	1000	±5%	30	0.79	2.5	60.0	55

Optional Tolerances: K = 10% J = 5% H = 3% G = 2% F = 1%



Series 1812

Performance Graphs

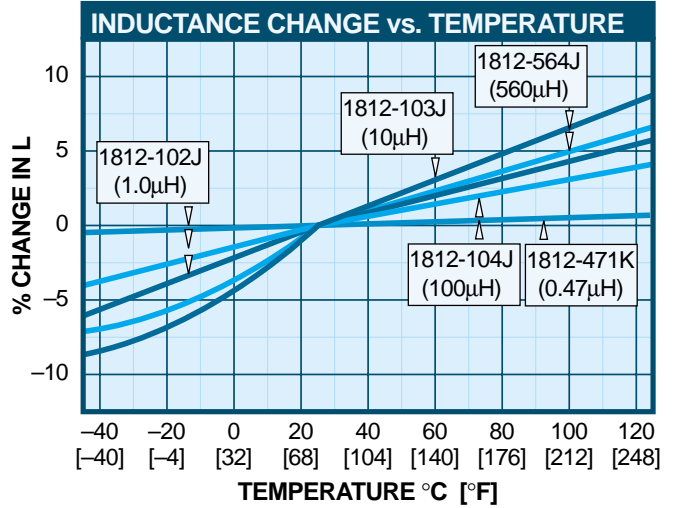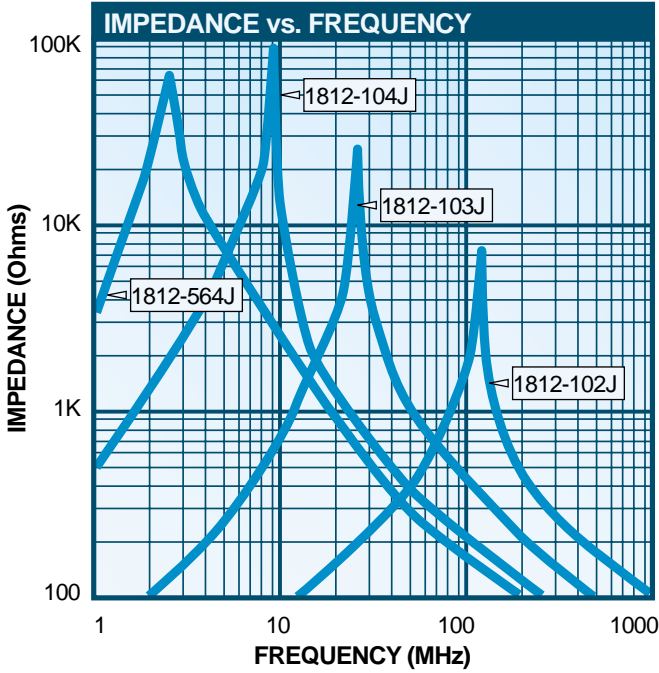

For more detailed graphs, contact factory

