




E1/T1/PR/CEPT Single Interface Transformers

Features

- SMD package for high density board placement
- consistent and reliable coplanarity
- controlled parameters ensure full compliance with ITU-T G.703 when matched with recommended IC
- ideal for all 1.544 and 2.048 Mbs interface applications
- manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- 1500Vrms minimum isolation voltage
- operating temperature: -4 0° to 85°
- fully RoHS compliant and meets lead free level J-STD-020C

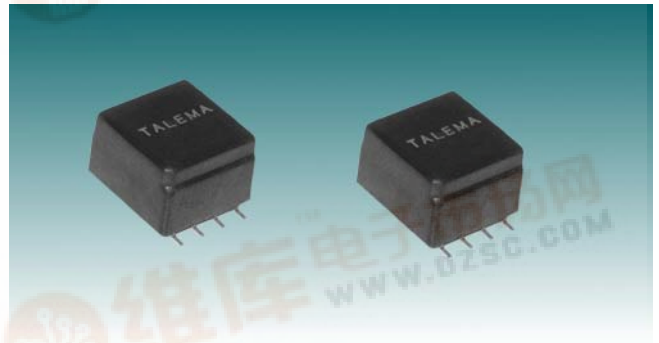

Electrical Specifications @ 25°C





S_{2M} Interface Transformers

Part Number	Turns Ratio ±2%	OCL (mH Min.) W2	L _L (µH Max.)	DCR (Ohms Max.) W1	DCR (Ohms Max.) W2	V _P (Vrms)
19794	1 : 1.414	4,0	1,0	0.4	0.5	1500

Test Conditions:

Inductance: W2 - measurement at 10kHz, 100mV
 Leakage Inductance: W2 <1.0µH, W1 short circuited - measurement at 100kHz, 10mA
 Turns Ratio: W1 : W2; Tolerance ±2%
 High Voltage: 2.0kV for 1 second, W1 to W2

Dimensions & Schematics

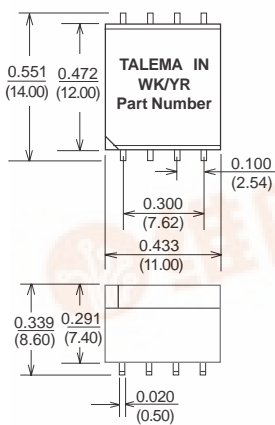

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: Int. + 420 377 - 338 351
 Fax: Int. + 420 377 - 338 350
 Email: talema@talema.cz
 Web Site: www.ntmagnetics.cz

Germany

TALEMAELEKTRONIK GMBH
 Sembdnerstr. 5, Postfach 2523
 82110 Germering
 Tel: Int. + 49 89 - 841 00 - 0
 Fax: Int. + 49 89 - 841 00 25
 Email: info@talema.de

Ireland

NUVOTEMTEO.
 Crollý
 Co. Donegal
 Tel: Int. + 353 74 - 954 8666
 Fax: Int. + 353 74 - 954 8139
 Email: info@nuvotem.com

India

TALEMAELECTRONIC PVT. LTD.
 Opposite the SIDCO Industrial Estate
 Gins Towers
 4/5.S.H/1, Omalur Main Road
 Salem - 636 004, Tamil Nadu
 Tel: Int. + 91 427 - 244 1325
 Fax: Int. + 91 427 - 243 0034
 E-mail: talema@talemaindia.com
 Web Site: www.talemaindia.com