

.050" Mini D Ribbon (MDR) Connectors

IDC Wiremount Panelmount Receptacle — Shielded

102XX-0210EC Series



- IDC wiremount shielded I/O Panelmount receptacle
- Ribbon type contact — industry preferred
- Reliable repetitive plugging/unplugging
- Latch design for easy use
- Accepts a wide variety of cable types including flat .050" and .025", shielded flat, round and twisted pair
- IEEE 1284 interface — 36 position
- Positions: 20, 26, 36, 40, 50 and 68

Date Modified: February 19, 1999

TS-0425-08
Sheet 1 of 2

90

Physical

Insulation

Material: Glass Reinforced Polyester (PBT)
Flammability: UL 94V-0
Color: Black

Contact

Material: Beryllium Copper (C172)
Plating
Underplate: 80 μ" (2.0 μm) Nickel — QQ-N-290, Class 2
Wiping Area: 30 μ" (0.76 μm) Min Gold — MIL-G-45204, Type II, Grade C

Body

Material: Zinc Alloy
Plating: Nickel

Shroud

Material: Steel
Plating: Nickel

Wire Accommodation: 28 AWG Stranded, 30 AWG Solid

Marking: 3M Logo and Part Identification Number

Electrical

Current Rating: 1 A

Insulation Resistance: $> 5 \times 10^8 \Omega$

Withstanding Voltage: 500 Vrms for 1 Minute

Environmental

Temperature Rating: -20°C to +85°C





.050" Mini D Ribbon (MDR) Connectors

IDC Wiremount Panelmount Receptacle — Shielded

102XX-0210EC Series



Contact Quantity	Dimensions						
	A	B	C	D	E	F	G
20	.450 [11.43]	1.081 [27.45]	1.31 [33.4]	.65 [16.4]	.92 [23.4]	.71 [18.0]	.94 [23.8]
26	.600 [15.24]	1.231 [31.26]	1.46 [37.2]	.80 [20.2]	1.07 [27.2]	.86 [21.8]	1.09 [27.6]
36	.850 [21.59]	1.481 [37.61]	1.71 [43.5]	1.05 [26.6]	1.32 [33.5]	1.11 [28.1]	1.33 [33.9]
40	.950 [24.13]	1.581 [40.15]	1.81 [46.1]	1.15 [29.1]	1.42 [36.1]	1.21 [30.7]	1.44 [36.5]
50	1.200 [30.48]	1.831 [46.50]	2.06 [52.4]	1.40 [35.5]	1.67 [42.4]	1.46 [37.0]	1.69 [42.8]
68	1.650 [41.91]	2.281 [57.93]	2.51 [63.8]	1.85 [46.9]	2.12 [53.8]	1.91 [48.4]	2.13 [54.2]

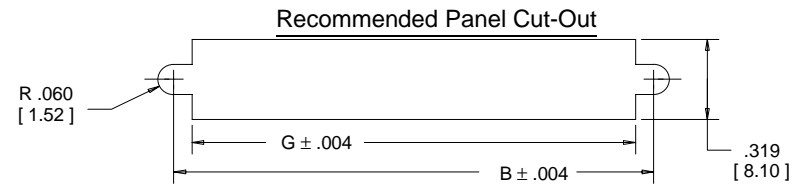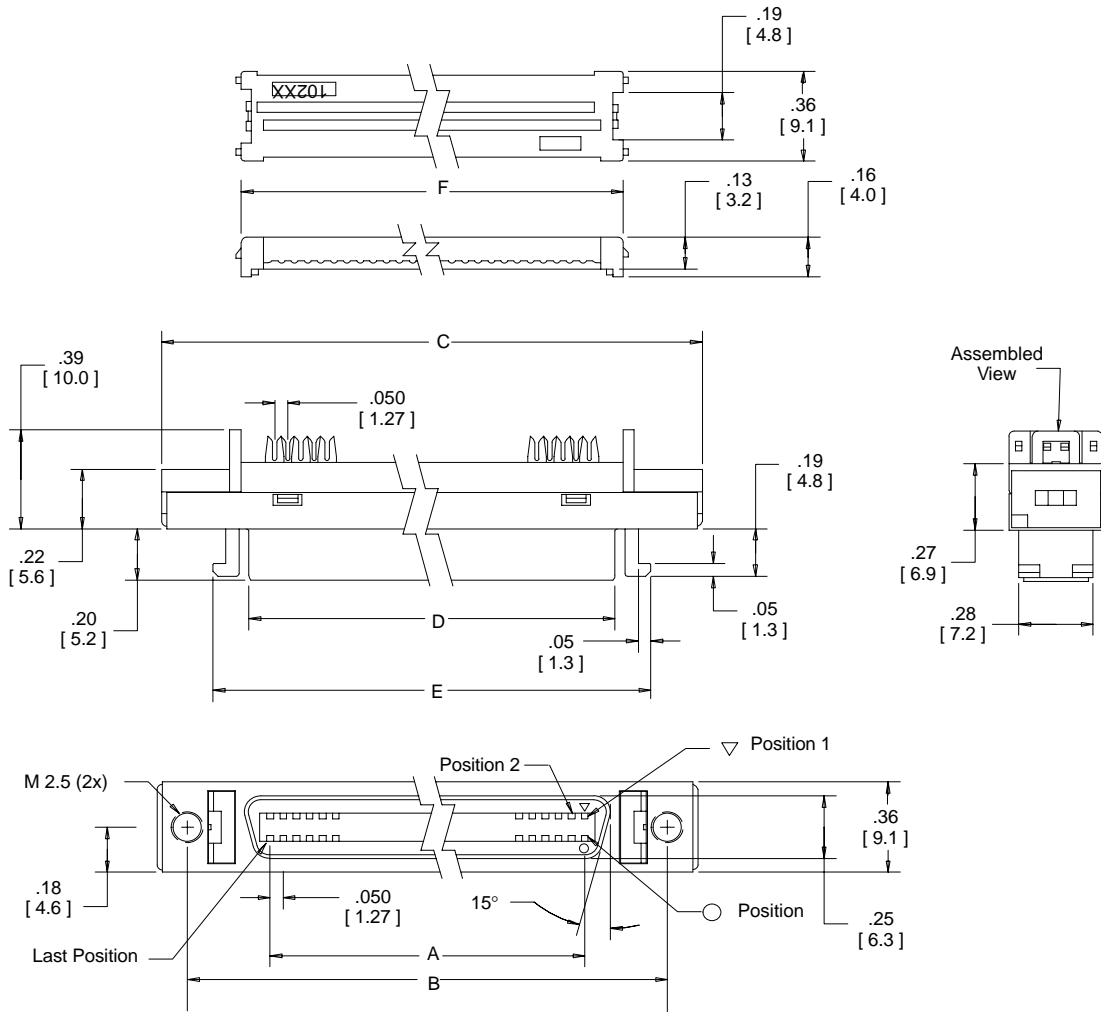

Note: Panel Thickness .079 [2.00] max.

Inch [mm]			
Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Ordering Information

102XX-0210EC

Contact Quantity
(See Table)

TS-0425-08
Sheet 2 of 2