


Surface Mount Termination 10 Watts, 50Ω

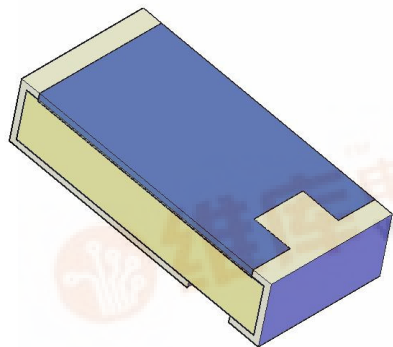

Features:

- 10 Watts
- Lowest Cost
- True Surface Mount
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

Description

The 100200-4Z50-2 is high performance Alumina surface mount termination intended as a lower cost alternative to Aluminum Nitride (AlN) and Beryllium Oxide (BeO). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating 90 degree hybrid, directional couplers, and for use in isolators.

General Specifications

Resistive Element	Thick film
Substrate	BeO Ceramic
Terminal Finish	Thick film Silver
Operating Temperature	-55 to +125°C (see chart)


Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. All dimensions in inches.

Electrical Specifications


Resistance Value:	50 ohms, $\pm 2\%$
Power:	10 Watts
Frequency Range:	DC – 3.0 GHz
V.S.W.R.:	1.25:1

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change without notice**


Outline Drawing

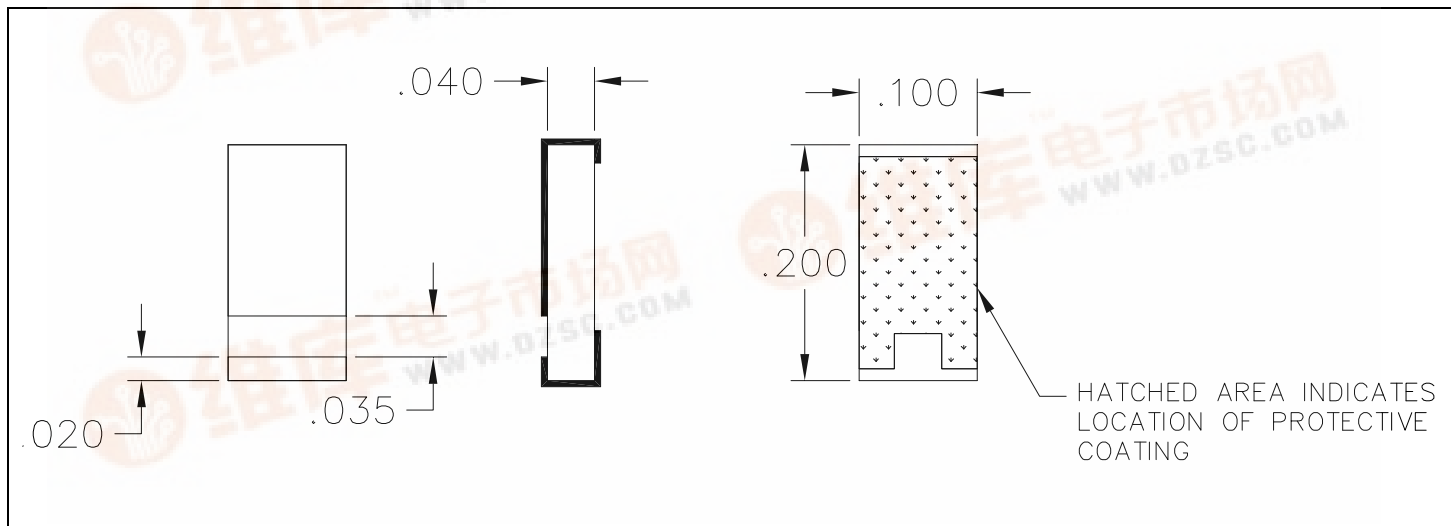


Typical Performance:

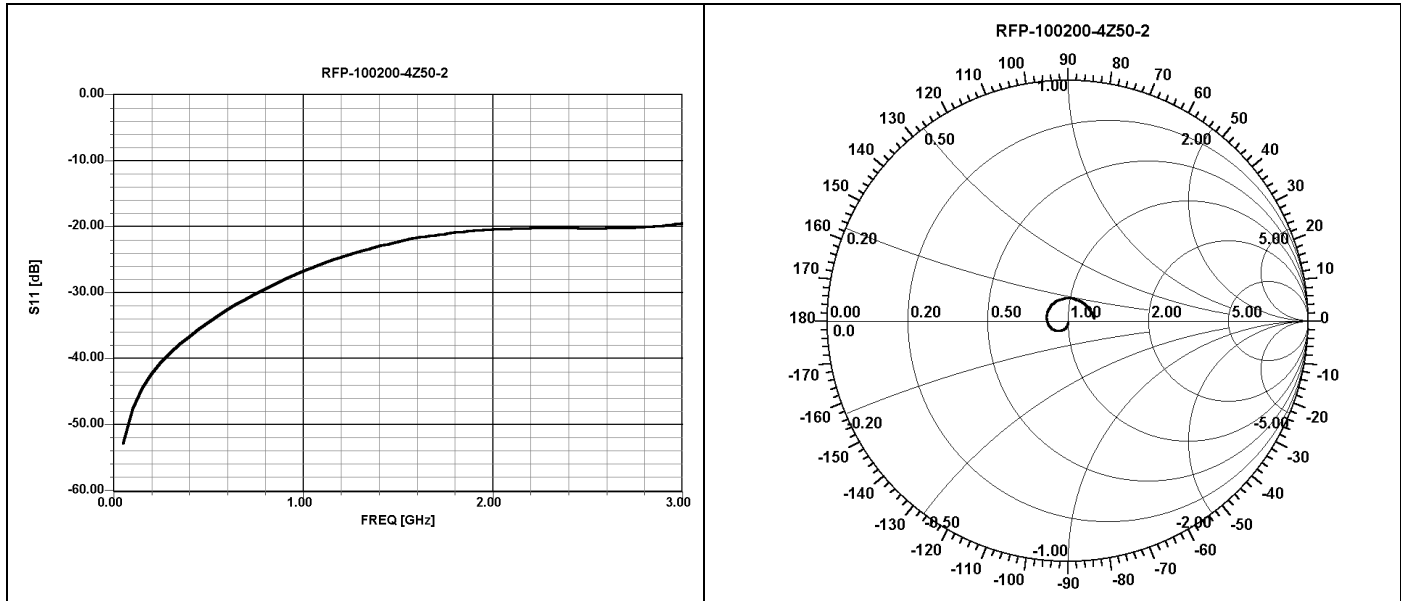

Power De-rating:

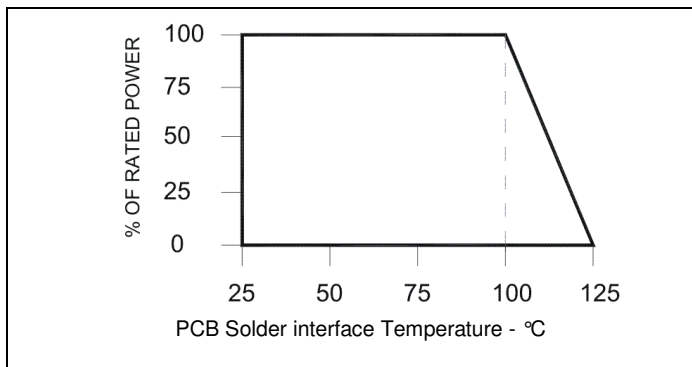

Tape & Reel:

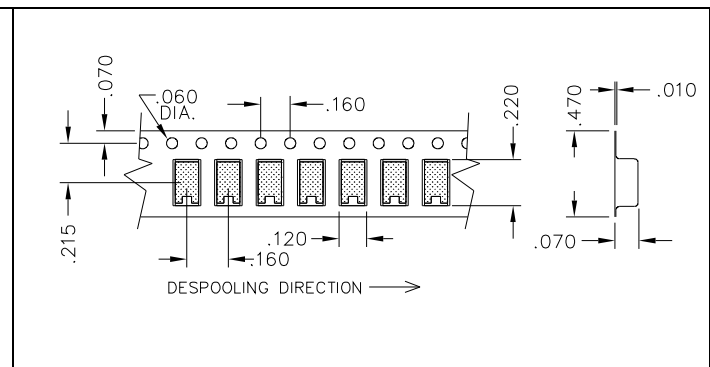

Mounting Footprint and Procedure:

