



# TECHNICAL DATA

## PNP SMALL SIGNAL SILICON TRANSISTOR

Qualified per MIL-PRF-19500/291

### Devices

2N2906A	2N2907A
2N2906AL	2N2907AL
2N2906AUA	2N2907AUA
2N2906AUB	2N2907AUB


### Qualified Level

JAN
JANTX
JANTXV
JANS

### MAXIMUM RATINGS

Ratings	Symbol	All Types	Unit	
Collector-Emitter Voltage	$V_{CEO}$	60	Vdc	
Collector-Base Voltage	$V_{CBO}$	60	Vdc	
Emitter-Base Voltage	$V_{EBO}$	5.0	Vdc	
Collector Current	$I_C$	600	mAdc	
Total Power Dissipation	$P_T^{(1)}$	@ $T_A = +25^\circ C$	0.4	W
		@ $T_C = +25^\circ C$	1.8	W
Operating & Storage Junction Temperature Range	$T_j, T_{stg}$	-65 to +200	$^\circ C$	

- 1) Derate linearly 2.28 mW/ $^\circ C$  for  $T_A > +25^\circ C$ .
- 2) Derate linearly 10.3 mW/ $^\circ C$  for  $T_C > +25^\circ C$ .
- 3) For UA and UB surface mount case outlines:  $P_T = 1.16$  W; derate linearly 6.6mW/ $^\circ C$  for  $T_C > +25^\circ C$ .

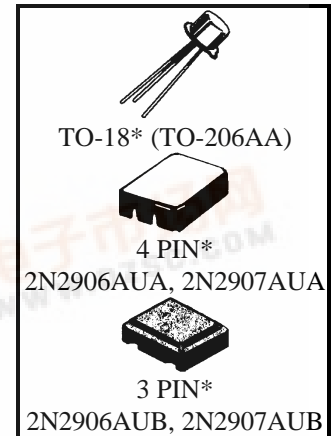

\*See appendix A for package outline

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

### OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 10$ mAdc	$V_{(BR)CEO}$	60		Vdc
Collector-Base Cutoff Current $V_{CE} = 50$ Vdc $V_{CE} = 60$ Vdc	$I_{CBO}$		10 10	$\mu$ Adc $\eta$ Adc
Collector-Base Cutoff Current $V_{CE} = 50$ Vdc	$I_{CES}$		50	$\eta$ Adc
Emitter-Base Cutoff Current $V_{EB} = 4.0$ Vdc $V_{EB} = 5.0$ Vdc	$I_{EBO}$		50 10	$\eta$ Adc $\mu$ Adc

**2N2906A, 2N2907A JAN SERIES**

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics	Symbol	Min.	Max.	Unit
<b>ON CHARACTERISTICS <sup>(4)</sup></b>				
Forward-Current Transfer Ratio $I_C = 0.1 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$	$h_{FE}$	2N2906A, UA, UB	40	
		2N2907A, UA, UB	75	
$I_C = 1.0 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$		2N2906A, UA, UB	40	175
		2N2907A, UA, UB	100	450
$I_C = 10 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$		2N2906A, UA, UB	40	
		2N2907A, UA, UB	100	
$I_C = 150 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$	2N2906A, UA, UB	40	120	
	2N2907A, UA, UB	100	300	
$I_C = 500 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$	2N2906A, UA, UB	40		
	2N2907A, UA, UB	50		
Collector-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{CE(sat)}$		0.4 1.6	Vdc
Base-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{BE(sat)}$	0.6	1.3 2.6	Vdc

**DYNAMIC CHARACTERISTICS**

Forward Current Transfer Ratio $V_{CE} = 10 \text{ Vdc}, I_C = 1.0 \text{ mAdc}, f = 1.0 \text{ kHz}$	2N2906A,UA, UB 2N2907A,UA, UB	$h_{fe}$	40 100	
Magnitude of Small-Signal Forward Current Transfer Ratio $V_{CE} = 20 \text{ Vdc}, I_C = 20 \text{ mAdc}, f = 100 \text{ MHz}$		$ h_{fe} $	2.0	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		$C_{obo}$	8.0	pF
Input Capacitance $V_{EB} = 2.0 \text{ Vdc}, I_C = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		$C_{ibo}$	30	pF

**SWITCHING CHARACTERISTICS**

Turn-On Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = 50 \text{ mAdc}$	$t_{on}$		45	$\eta s$
Turn-Off Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = -I_{B2} = 50 \text{ mAdc}$	$t_{off}$		300	$\eta s$

(4) Pulse Test: Pulse Width = 300 $\mu s$ , Duty Cycle  $\leq$  2.0%.