



# 2RI 60G-120/160

**2-Pack Diode**  
1200/1600 V  
60 A

## POWER DIODE MODULE


### Features

- All the terminals and the mounting plate are electrically isolated. These modules can be installed in the same cooling fin as other modules, thus saving installation space – a cost-effective feature.
- The diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation.
- Two diodes chips are connected in series internally, so allowing the rectifying circuit to be simplified.

### Applications


- Inverters for AC motors
- Power supply units for DC motors
- DC power supply units for battery chargers
- General purpose DC power supply units

### ■ Outline Drawings

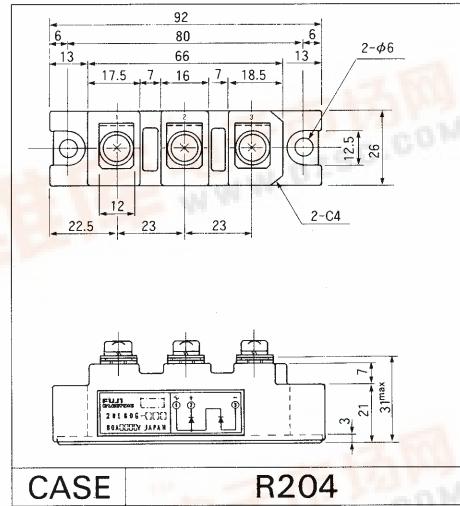

CASE R204

### ■ Inner Circuit Schematic

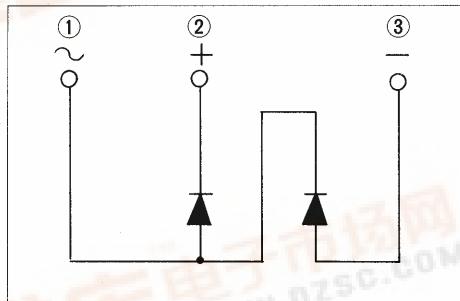

### ■ Maximum Ratings and Characteristics

#### • Absolute Maximum Ratings

Items	Symbols	Conditions	2RI60G		Units
			-120	-160	
Repetitive peak reverse voltage	$V_{RRM}$		1200	1600	V
Non-repetitive peak reverse voltage	$V_{RSM}$		1320	1760	V
Average forward current	$I_{F(AV)}$	50/60 Hz Sinewave, $T_C = 110^\circ C$	2×60		A
Surge current	$I_{FSM}$	Rated load conditions	1200		A
$I^2_t$	$I^2_t$	Rated load conditions	6000		A <sup>2</sup> s
Junction temperature	$T_j$		-40~+150		°C
Storage temperature	$T_{stg}$		-40~+125		°C
Tightening torque		Mounting screw: M5	25±5		kg·cm
Vibration resistance			5		G
Dielectric strength		Between terminals and base	2500 VAC 1min		
Net. Weight			180		g


#### • Electrical Characteristics

Items	Symbols	Conditions	Min	Typ	Max	Units
Forward voltage	$V_{FM}$	$T_j=25^\circ C$ , $I_{FM}=190 A$			1.40	V
Reverse current	$I_{RRM}$	$T_j=150^\circ C$ , $V_R=V_{RRM}$			20	mA


#### • Thermal Characteristics

Items	Symbols	Conditions	Min	Typ	Max	Units
Thermal resistance (Junction to case)	$R_{th(j-c)}$	50/60 Hz Sinewave, Thermal resistance for total loss			0.25	°C/W
Thermal resistance	$R_{th(j-a)}$	With thermal compound			0.10	°C/W


■ Characteristic curves

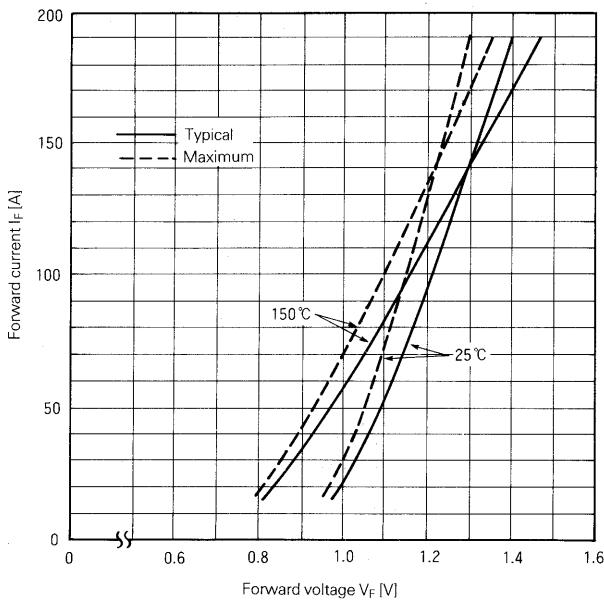

Forward Characteristics

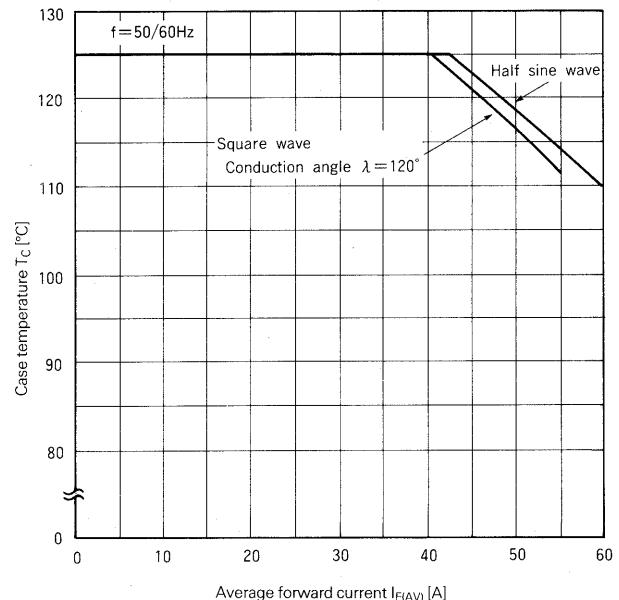

Case Temperature vs. Output Current

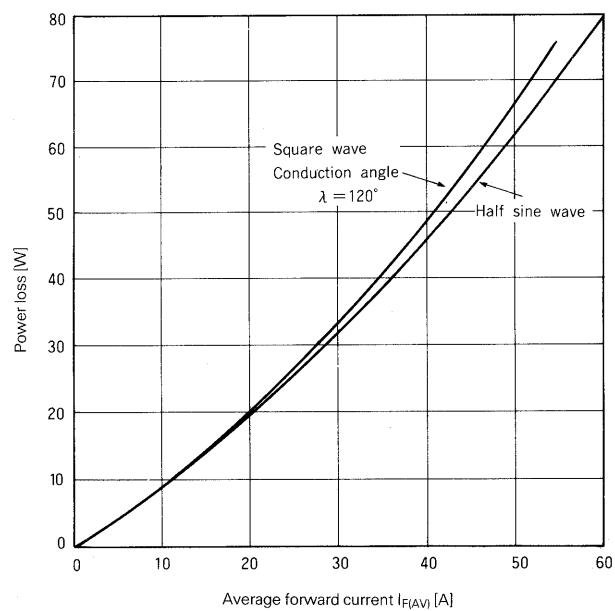


Average Forward Current vs. Power Loss


**FUJI**  
**ELECTRIC**

**2RI 60G-120/160**

**2-Pack Diode**  
**1200/1600 V**  
**60 A**

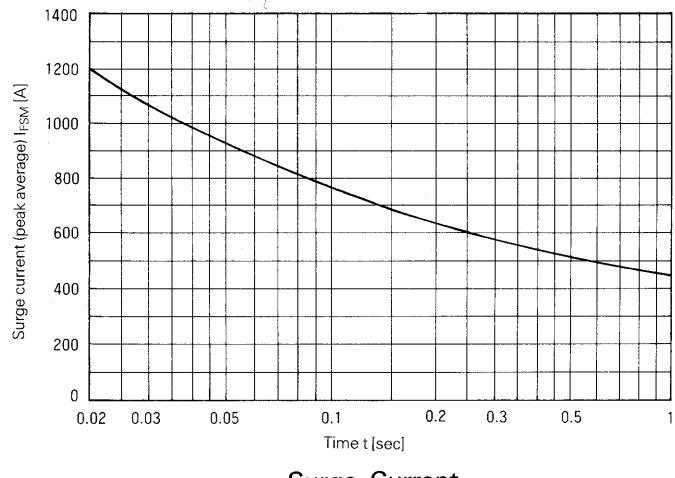

**Surge Current**

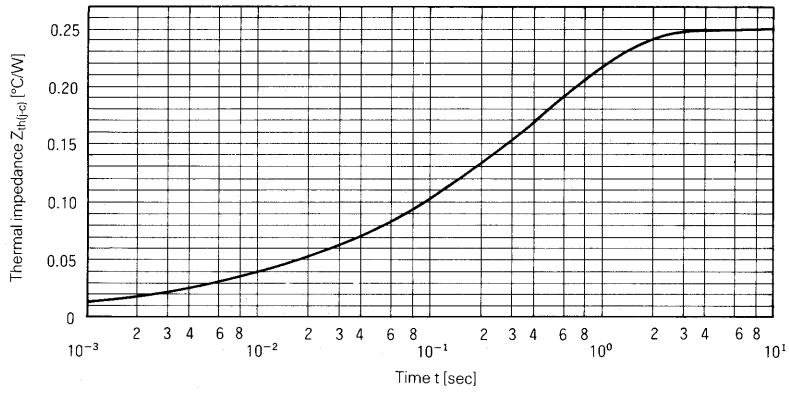

**Transient Thermal Impedance**

For more information, contact:

**Collmer Semiconductor, Inc.**

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>