

SANYO	No.3104A	2SC4218
	NPN Triple Diffused Planar Silicon Transistor Color TV Chroma Output, High-Voltage Driver Applications	

Features

- High breakdown voltage
- Small reverse transfer capacitance and excellent high frequency characteristics
- Adoption of FBET process

Absolute Maximum Ratings at Ta = 25°C

			unit
Collector to Base Voltage	V _{CB0}	300	V
Collector to Emitter Voltage	V _{CE0}	300	V
Emitter to Base Voltage	V _{EBO}	5	V
Collector Current	I _C	100	mA
Peak Collector Current	i _{cp}	200	mA
Collector Dissipation	P _C	500	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C


Electrical Characteristics at Ta = 25°C

			min	typ	max	unit
Collector Cutoff Current	I _{CB0}	V _{CB} = 200V, I _E = 0			0.1	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} = 4V, I _C = 0			0.1	μA
DC Current Gain	h _{FE}	V _{CE} = 10V, I _C = 1mA	60		320	
Gain-Bandwidth Product	f _T	V _{CE} = 30V, I _C = 10mA		70		MHz
C-E Saturation Voltage	V _{CE(sat)}	I _C = 10mA, I _B = 1mA			0.6	V
B-E Saturation Voltage	V _{BE(sat)}	I _C = 10mA, I _B = 1mA			1.0	V
C-B Breakdown Voltage	V _{(BR)CBO}	I _C = 10μA, I _E = 0	300			V
C-E Breakdown Voltage	V _{(BR)CEO}	I _C = 1mA, R _{BE} = ∞	300			V
E-B Breakdown Voltage	V _{(BR)EBO}	I _E = 10μA, I _C = ∞	5			V
Output Capacitance	c _{ob}	V _{CB} = 30V, f = 1MHz		1.5		pF
Reverse Transfer Capacitance	c _{re}	V _{CB} = 30V, f = 1MHz		1.0		pF

※ : The 2SC4218 is classified by 1mA h_{FE} as follows :

60	D	120	100	E	200	160	F	320
----	---	-----	-----	---	-----	-----	---	-----

Case Outline 2003A
(unit : mm)








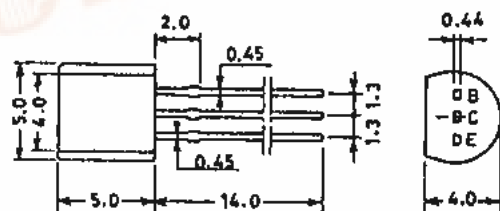



JEDEC: TO-92 B: Base
EIAJ : SC-43 C: Collector
SANYO: NP E: Emitter



Specifications and information herein are subject to change without notice.

2SC4218

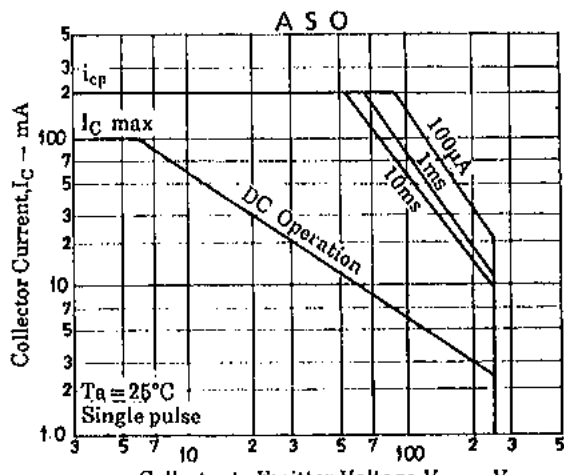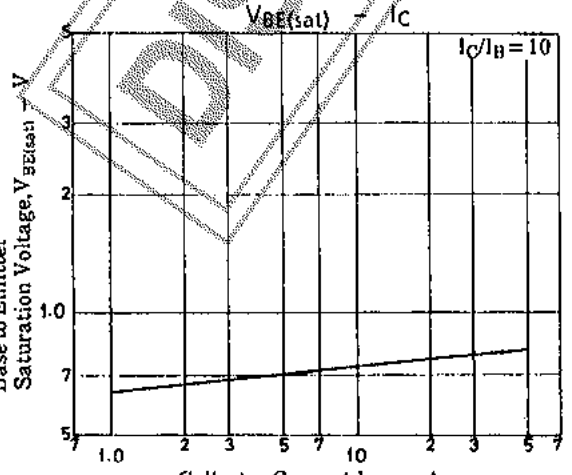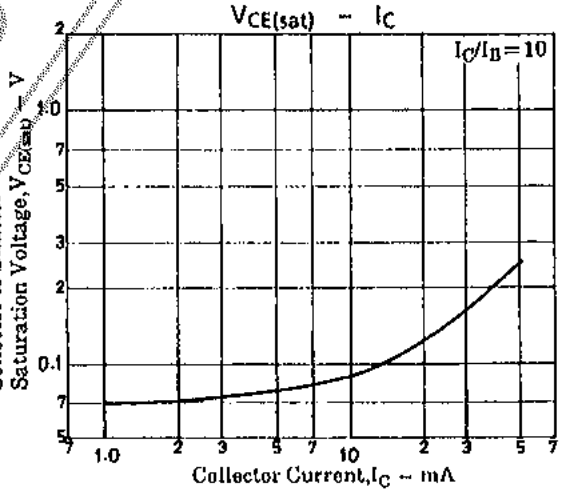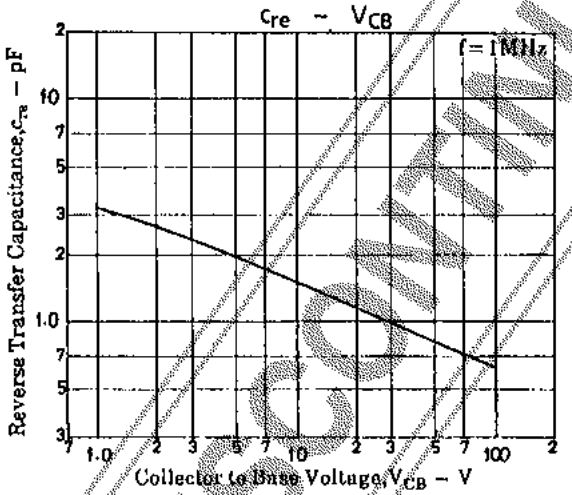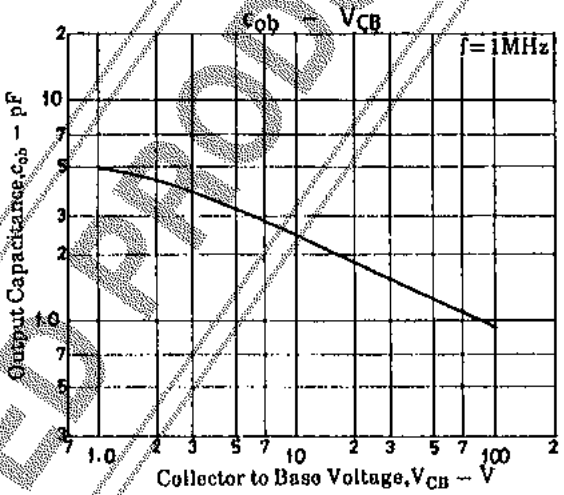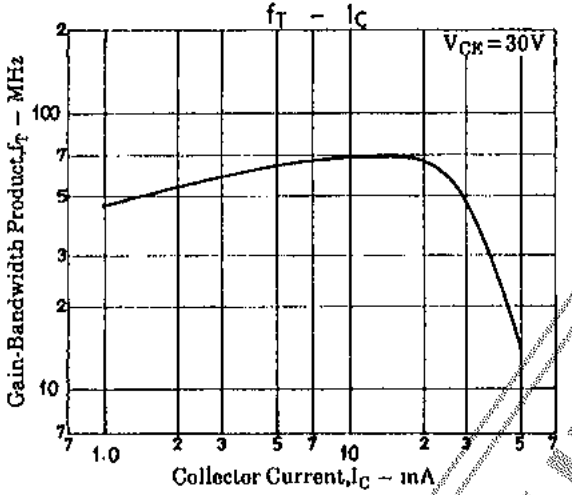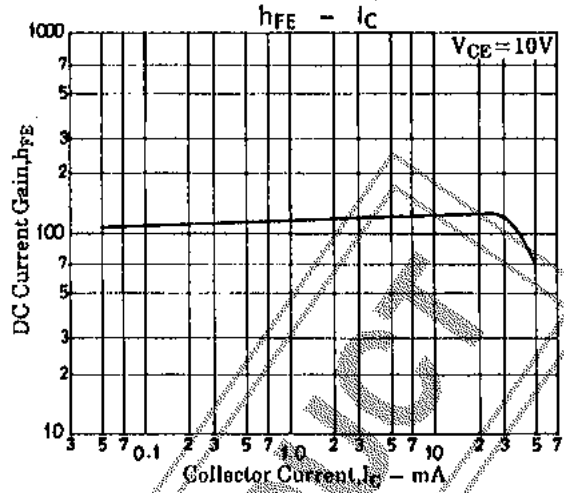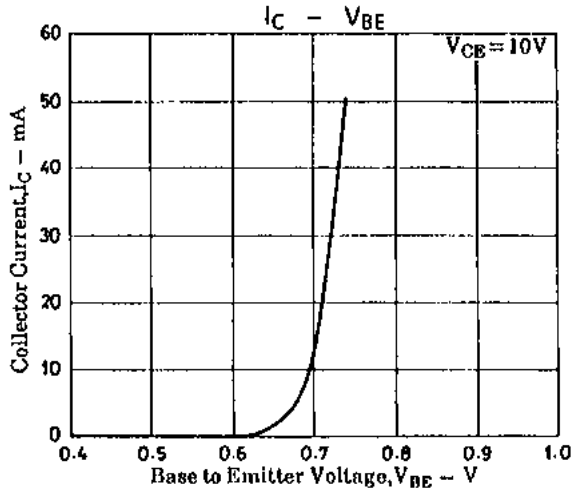

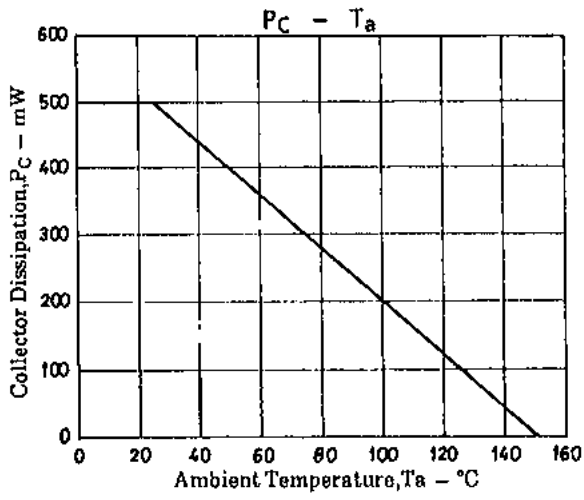

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced. The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

DISCONTINUED PRODUCT