

2SD2254

Silicon NPN triple diffusion planar type Darlington

For power amplification


Complementary to 2SB1492

Features


- Optimum for 60W HiFi output
- High forward current transfer ratio h_{FE} : 5000 to 30000
- Low collector to emitter saturation voltage $V_{CE(sat)}$: <2.5V

Absolute Maximum Ratings ($T_C=25^\circ C$)

Parameter	Symbol	Ratings	Unit	
Collector to base voltage	V_{CBO}	130	V	
Collector to emitter voltage	V_{CEO}	110	V	
Emitter to base voltage	V_{EBO}	5	V	
Peak collector current	I_{CP}	10	A	
Collector current	I_C	6	A	
Collector power dissipation	P_C	$T_C=25^\circ C$	70	W
		$T_a=25^\circ C$	3.5	
Junction temperature	T_j	150	$^\circ C$	
Storage temperature	T_{stg}	-55 to +150	$^\circ C$	

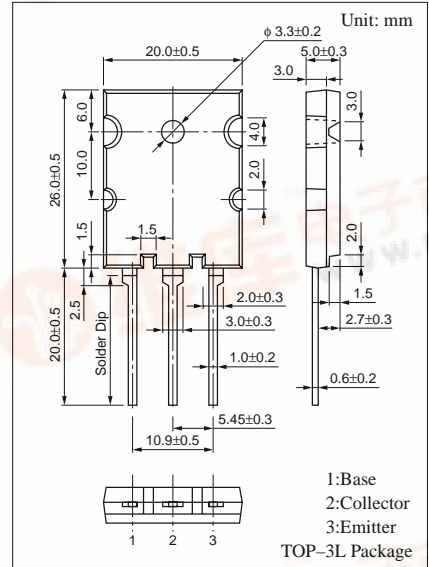

Internal Connection

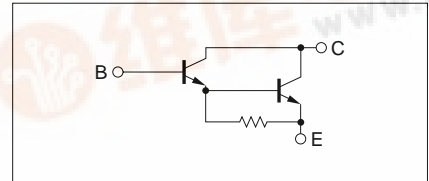









Electrical Characteristics ($T_C=25^\circ C$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 130V, I_E = 0$			100	μA
	I_{CEO}	$V_{CE} = 110V, I_B = 0$			100	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			100	μA
Collector to emitter voltage	V_{CEO}	$I_C = 30mA, I_B = 0$	110			V
Forward current transfer ratio	h_{FE1}	$V_{CE} = 5V, I_C = 1A$	2000			
	h_{FE2}^*	$V_{CE} = 5V, I_C = 5A$	5000		30000	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 5A, I_B = 5mA$			2.5	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 5A, I_B = 5mA$			3.0	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 0.5A, f = 1MHz$		20		MHz
Turn-on time	t_{on}	$I_C = 5A, I_{B1} = 5mA, I_{B2} = -5mA, V_{CC} = 50V$		1.4		μs
Storage time	t_{stg}			4.5		μs
Fall time	t_f			0.8		μs

h_{FE2} Rank Classification

Rank	Q	P
h _{FE2}	5000 to 15000	8000 to 30000



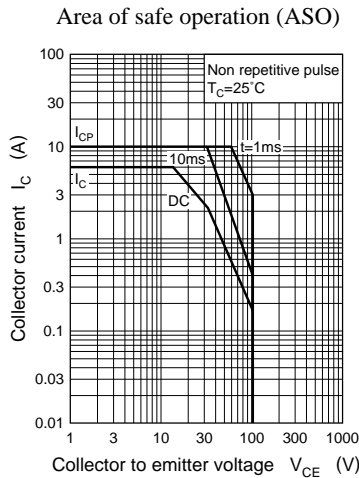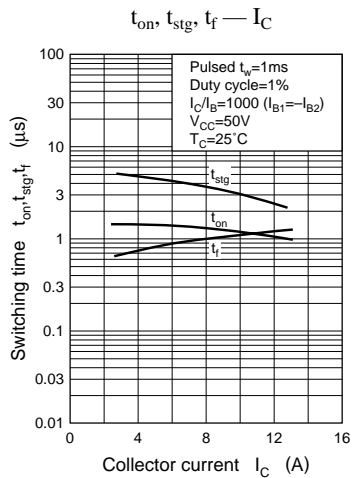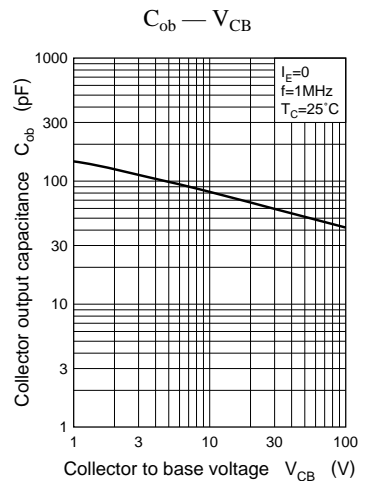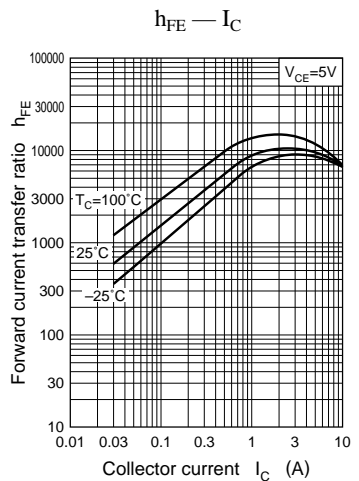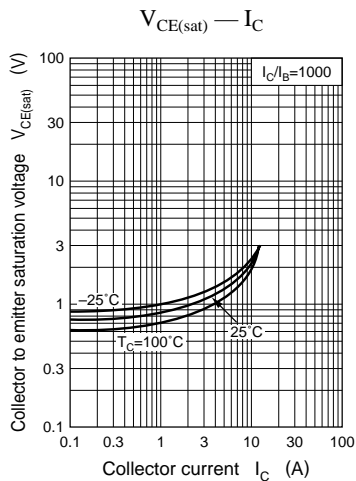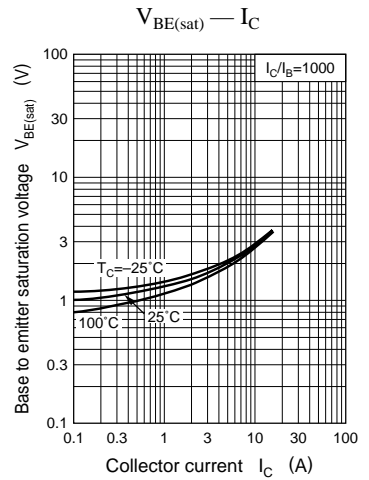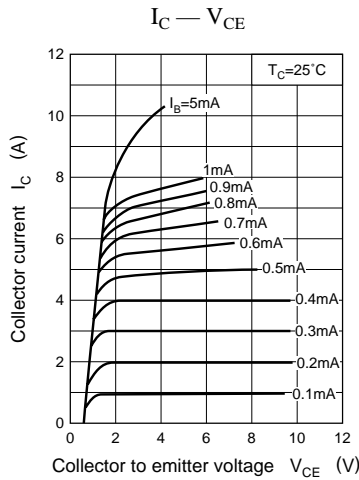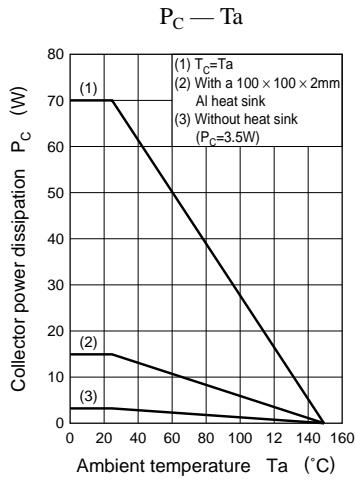

$$R_{th(t)} - t$$

