

2SK551

查询2SK551供应商

4496205 0013079 577 HIT4

搜多邦, 专业PCB打样工厂, 24小时加

HITACHI/(OPTOELECTRONICS) 急出货 61E D

SILICON N-CHANNEL MOS FET

HIGH SPEED POWER SWITCHING


FEATURES

- Low On-Resistance
- High Speed Switching
- Low Drive Current
- No Secondary Breakdown
- Suitable for Switching Regulator, DC-DC Converter and Motor Driver



1. Gate
2. Drain (Flange)
3. Source

(Dimensions in mm)

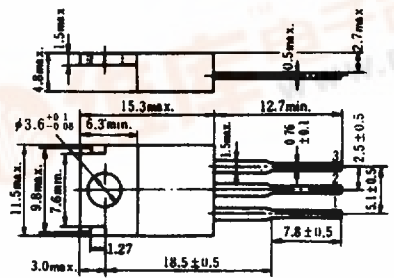

(JEDEC TO-220AB)

ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	120	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current	I_D	10	A
Drain Peak Current	$I_{D(\text{pulse})}^*$	40	A
Body-Drain Diode Reverse Drain Current	I_{DR}	10	A
Channel Dissipation	P_{ch}^{**}	50	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-55 \sim +150$	$^\circ\text{C}$

* $PW \leq 10\mu\text{s}$, duty cycle $\leq 1\%$


**Value at $T_c=25^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)


Item	Symbol	Test Condition	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DS}$	$I_D=10\text{mA}$, $V_{GS}=0$	120	—	—	V
Gate-Source Breakdown Voltage	$V_{(BR)GS}$	$I_G=\pm 100\mu\text{A}$, $V_{DS}=0$	± 20	—	—	V
Gate-Source Leak Current	I_{GS}	$V_{GS}=\pm 16\text{V}$, $V_{DS}=0$	—	—	± 10	μA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100\text{V}$, $V_{GS}=0$	—	—	250	μA
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$I_D=1\text{mA}$, $V_{DS}=10\text{V}$	2.0	—	4.0	V
Static Drain-Source On State Resistance	$R_{DS(on)}$	$I_D=5\text{A}$, $V_{GS}=10\text{V}^*$	—	0.15	0.2	Ω
Forward Transfer Admittance	$ y_f $	$I_D=5\text{A}$, $V_{DS}=10\text{V}^*$	3.0	5.0	—	S
Input Capacitance	C_{iss}	$V_{DS}=10\text{V}$, $V_{GS}=0$, $f=1\text{MHz}$	—	730	—	pF
Output Capacitance	C_{oss}		—	330	—	pF
Reverse Transfer Capacitance	C_{riss}		—	40	—	pF
Turn-on Delay Time	t_{don}	$I_D=5\text{A}$, $V_{GS}=10\text{V}$, $R_L=6\Omega$	—	15	—	ns
Rise Time	t_r		—	40	—	ns
Turn-off Delay Time	t_{doff}		—	70	—	ns
Fall Time	t_f		—	45	—	ns
Body-Drain Diode Forward Voltage	V_{DF}		$I_F=10\text{A}$, $V_{GS}=0$	—	1.2	—
Body-Drain Diode Reverse Recovery Time	t_r	$I_F=10\text{A}$, $V_{GS}=0$ $di/dt=50\text{A}/\mu\text{s}$	—	200	—	ns

*Pulse Test


POWER VS. TEMPERATURE DERATING

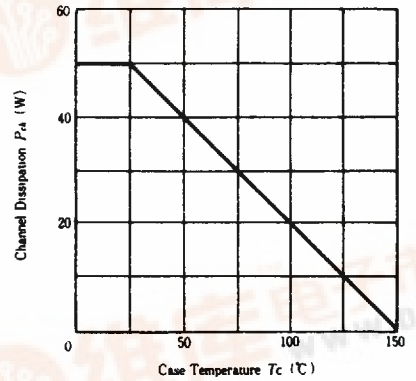

AREA OF SAFE OPERATION

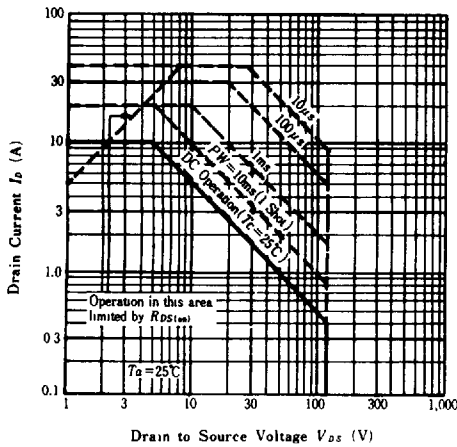


TYPICAL OUTPUT CHARACTERISTICS

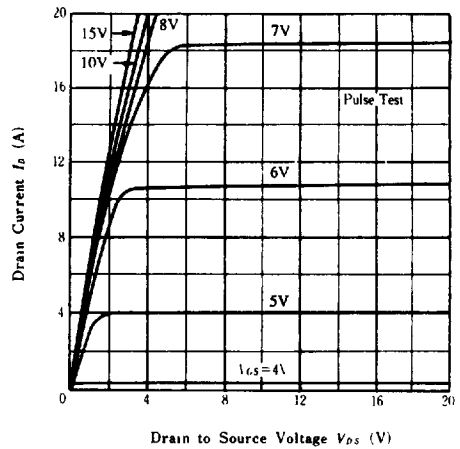


HITACHI/(OPTOELECTRONICS)


TYPICAL TRANSFER CHARACTERISTICS

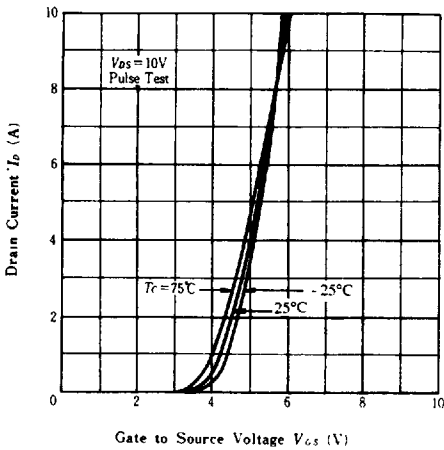


DRAIN TO SOURCE SATURATION VOLTAGE VS. GATE TO SOURCE VOLTAGE

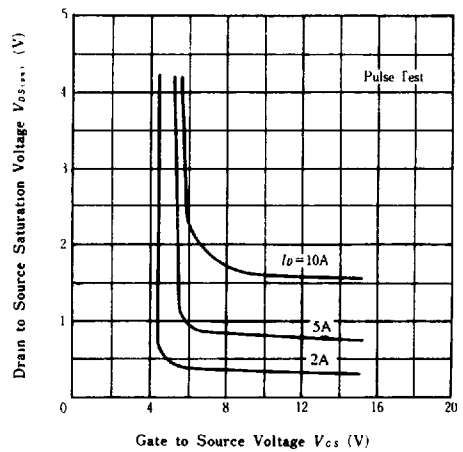


STATIC DRAIN TO SOURCE ON STATE RESISTANCE VS. DRAIN CURRENT

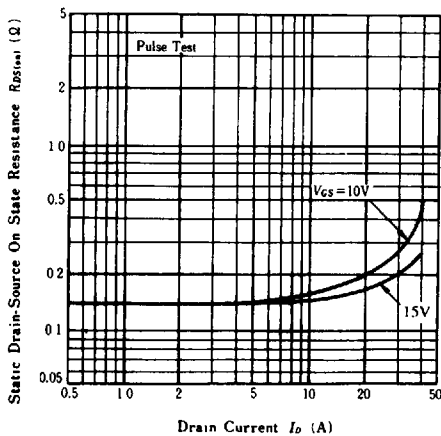


STATIC DRAIN TO SOURCE ON STATE RESISTANCE VS. CASE TEMPERATURE

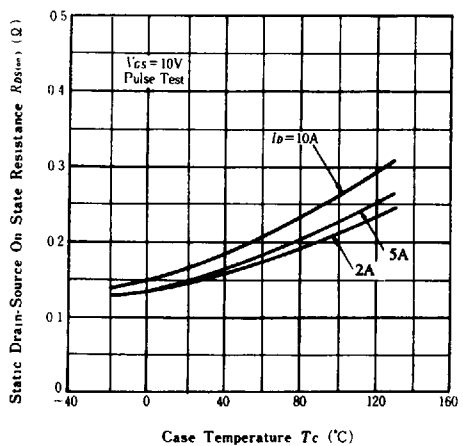


**FORWARD TRANSFER ADMITTANCE
VS. DRAIN CURRENT**

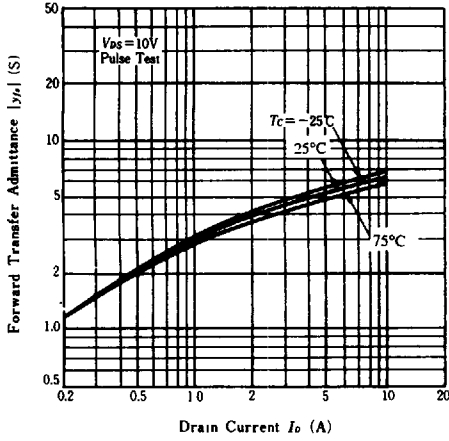


**FORWARD TRANSFER ADMITTANCE
VS. FREQUENCY**

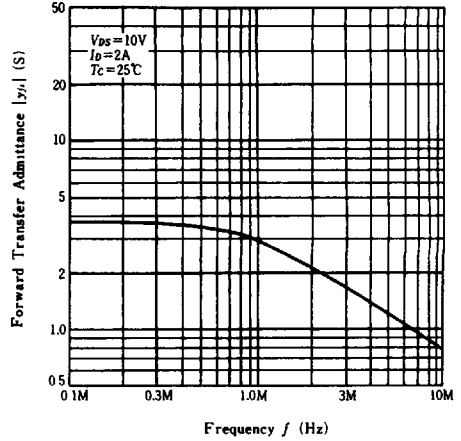


**CAPACITANCE VS.
DRAIN TO SOURCE VOLTAGE**

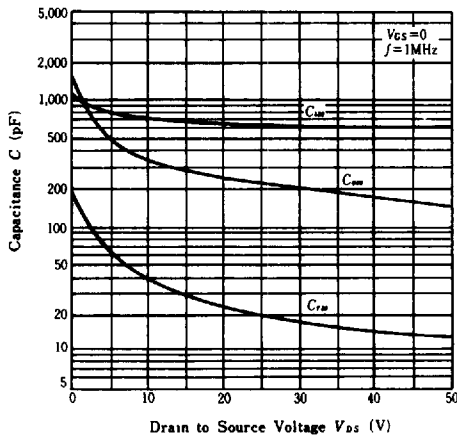


DYNAMIC INPUT CHARACTERISTICS

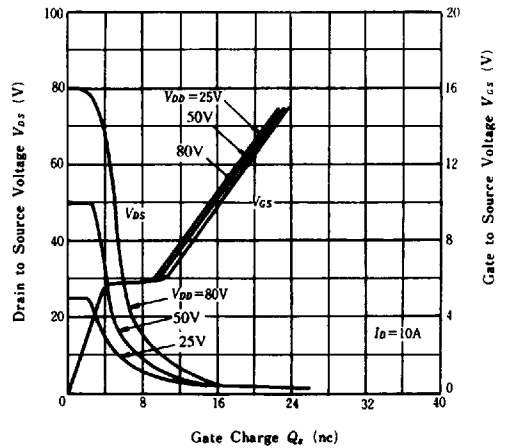

**SWITCHING TIME VS.
DRAIN CURRENT**

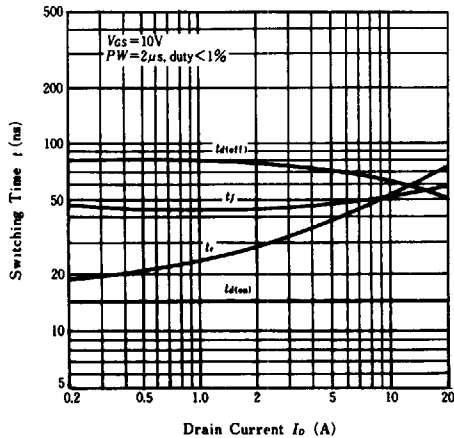


**REVERSE DRAIN CURRENT VS.
SOURCE TO DRAIN VOLTAGE**

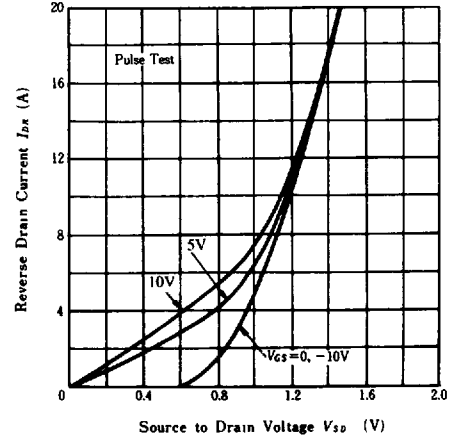


HITACHI/(OPTOELECTRONICS)

NORMALIZED TRANSIENT THERMAL IMPEDANCE VS. PULSE WIDTH

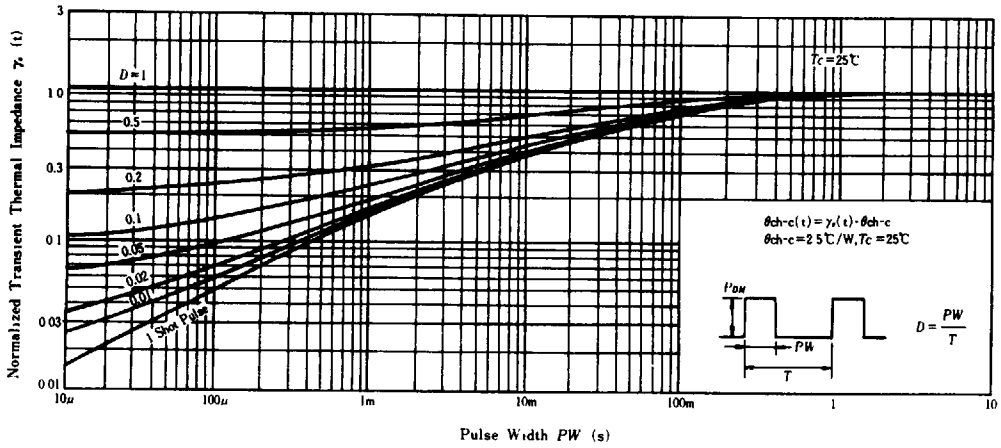

SWITCHING TIME TEST CIRCUIT

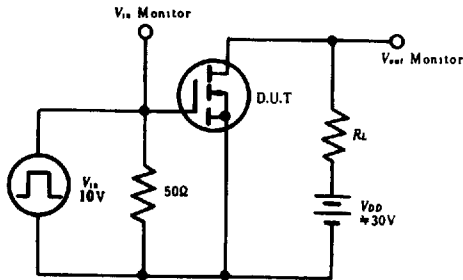

WAVEFORM

