

# SHINDENGEN

## VX-2 Series Power MOSFET

N-Channel Enhancement type

**2SK2178  
(F2E50VX2)**

**500V 2A**

### FEATURES

Input capacitance ( $C_{iss}$ ) is small.  
Especially, input capacitance at 0 bias is small.  
The static  $R_{ds(on)}$  is small.  
The switching time is fast.

### APPLICATION


Switching power supply of AC 100V input  
High voltage power supply  
Inverter

### RATINGS

Absolute Maximum Ratings ( $T_c = 25^\circ C$ )

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-55 ~ 150	
Channel Temperature	$T_{ch}$		150	
Drain-Source Voltage	$V_{DSS}$		500	V
Gate-Source Voltage	$V_{GSS}$		$\pm 30$	
Continuous Drain Current (DC)	$I_D$		2	
Continuous Drain Current (Peak)	$I_{DP}$		6	A
Continuous Source Current (DC)	$I_S$		2	
Total Power Dissipation	$P_T$		15	W
Single Pulse Avalanche Current	$I_{AS}$	$T_{ch} = 25^\circ C$	2	A

### OUTLINE DIMENSIONS

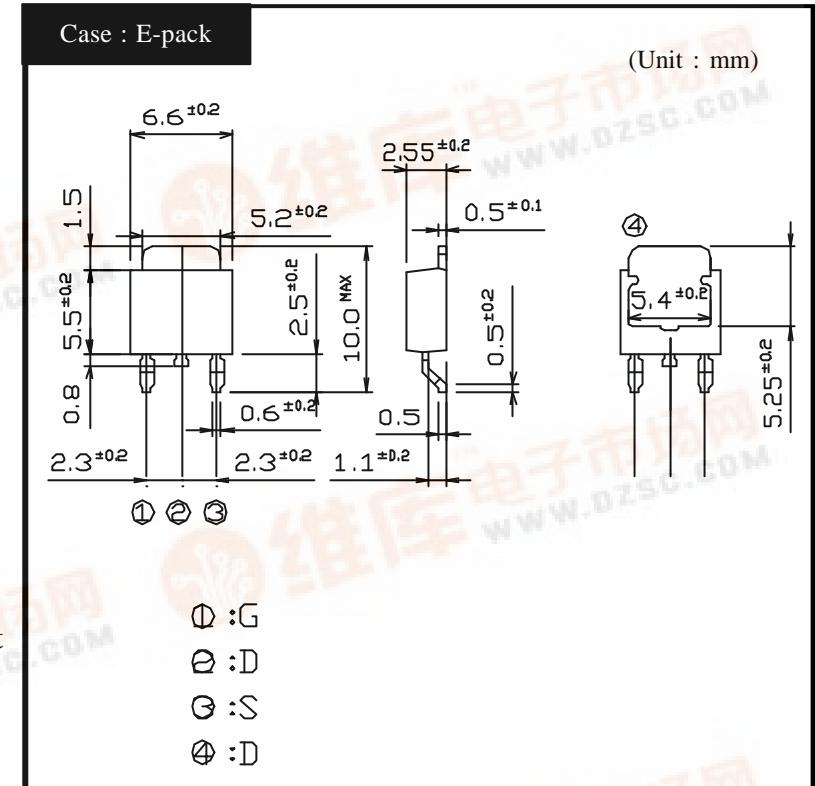

## VX-2 Series Power MOSFET


**2SK2178 ( F2E50VX2 )**

### ● Electrical Characteristics $T_c = 25^\circ\text{C}$


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$\text{ID} = 1\text{mA}, \text{VGS} = 0\text{V}$	500			V
Zero Gate Voltage Drain Current	$\text{ID}_{\text{SS}}$	$\text{VDS} = 500\text{V}, \text{VGS} = 0\text{V}$			250	$\mu\text{A}$
Gate-Source Leakage Current	$I_{\text{GSS}}$	$\text{VGS} = \pm 30\text{V}, \text{VDS} = 0\text{V}$			$\pm 0.1$	
Forward Transconductance	$g_{\text{fs}}$	$\text{ID} = 1\text{A}, \text{VDS} = 10\text{V}$	0.6	1.3		S
Static Drain-Source On-state Resistance	$R_{\text{DS}(\text{ON})}$	$\text{ID} = 1\text{A}, \text{VGS} = 10\text{V}$		3.2	4.0	$\Omega$
Gate Threshold Voltage	$V_{\text{TH}}$	$\text{ID} = 0.3\text{mA}, \text{VDS} = 10\text{V}$	2.5	3.0	3.5	V
Source-Drain Diode Forward Voltage	$V_{\text{SD}}$	$\text{IS} = 1\text{A}, \text{VGS} = 0\text{V}$			1.5	
Thermal Resistance	$\theta_{\text{jc}}$	junction to case			8.33	$^\circ\text{C}/\text{W}$
Total Gate Charge	$Q_g$	$\text{VDD} = 400\text{V}, \text{VGS} = 10\text{V}, \text{ID} = 2\text{A}$		9		nC
Input Capacitance	$C_{\text{iss}}$	$\text{VDS} = 10\text{V}, \text{VGS} = 0\text{V}, f = 1\text{MHz}$		220		pF
Reverse Transfer Capacitance	$C_{\text{rss}}$			17		
Output Capacitance	$C_{\text{oss}}$			55		
Turn-On Time	$t_{\text{on}}$	$\text{ID} = 1\text{A}, \text{VGS} = 10\text{V}, \text{RL} = 150\Omega$		40	75	ns
Turn-Off Time	$t_{\text{off}}$			70	120	

## 2SK2178 Static Drain-Source On-state Resistance


---

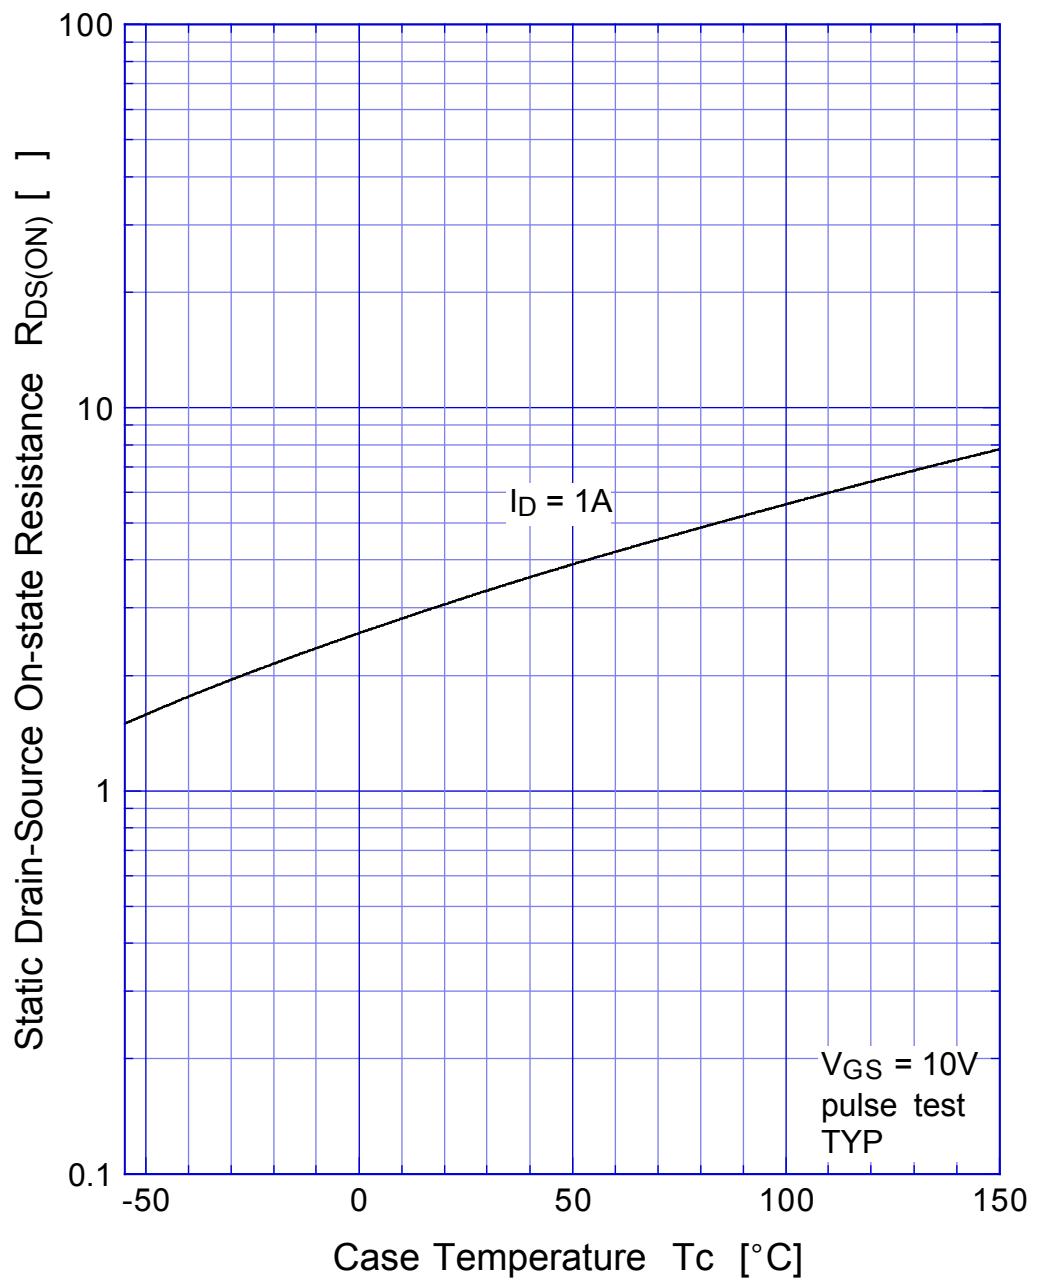

## 2SK2178 Gate Threshold Voltage

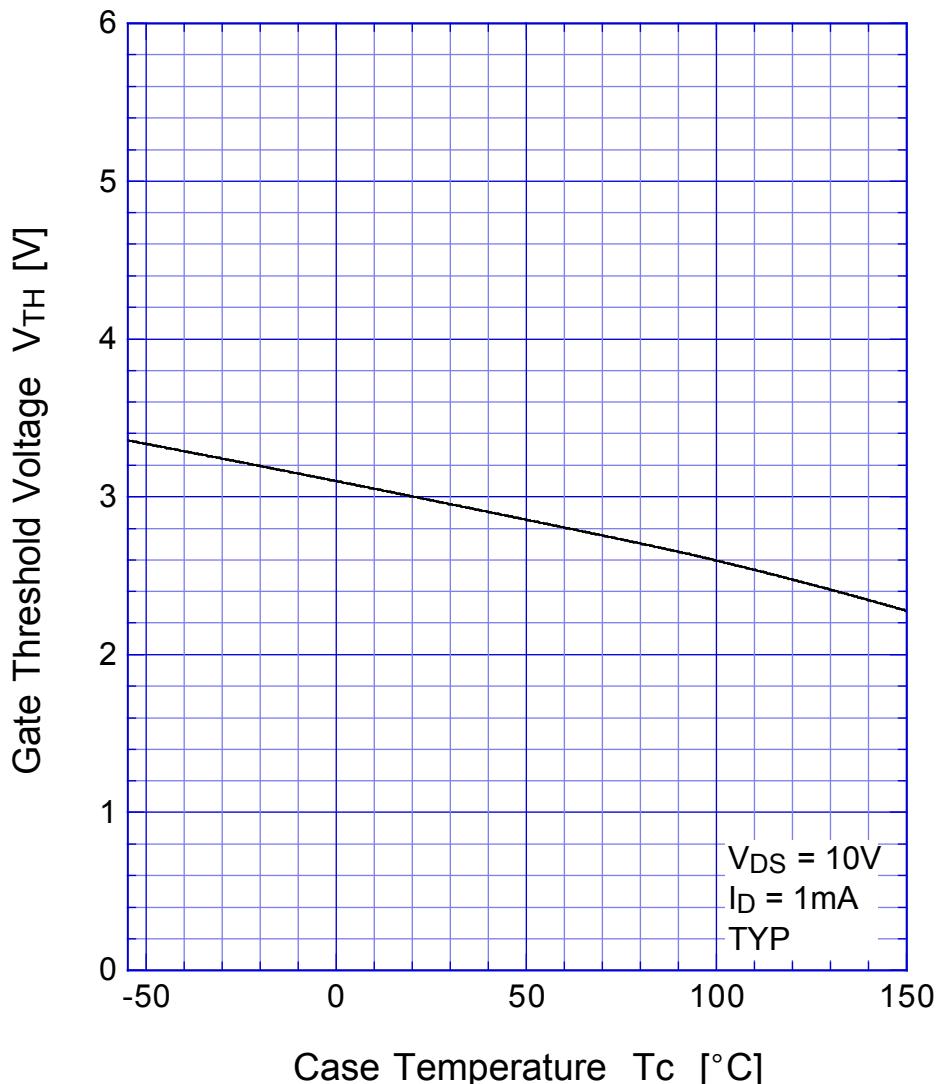

## 2SK2178 Transient Thermal Impedance

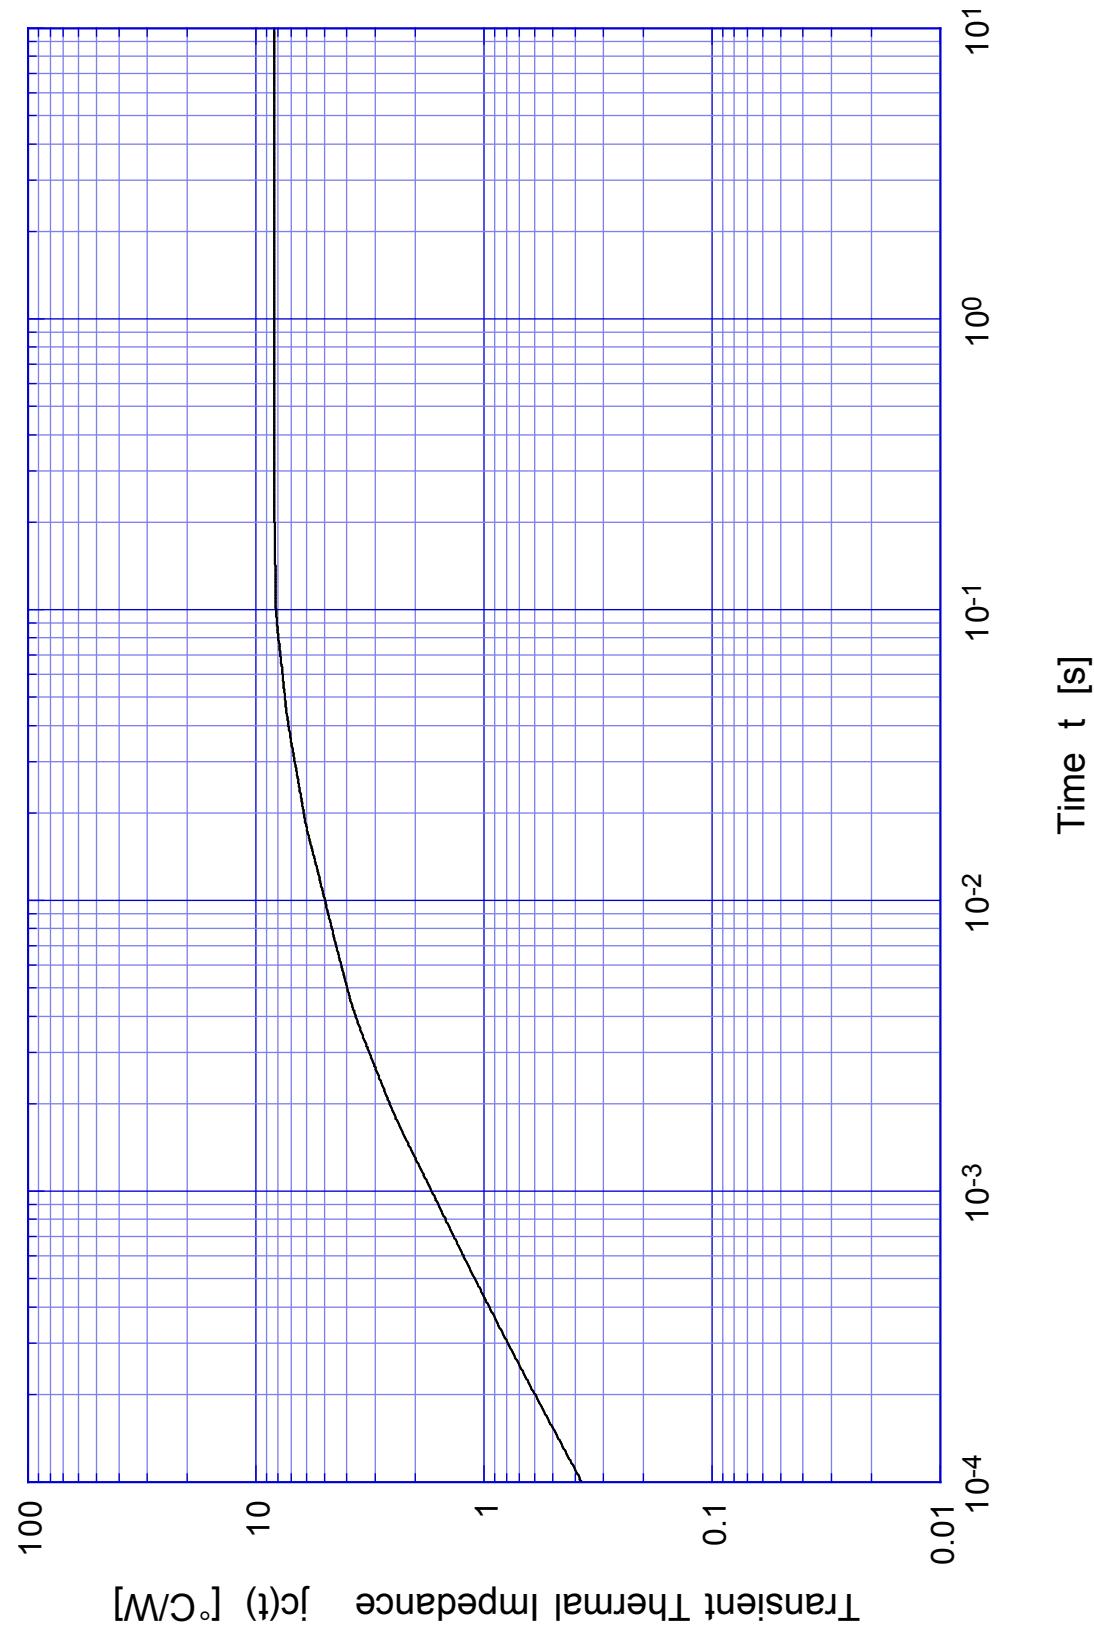

**2SK2178**

Power Derating

