

SHINDENGEN

VX-2 Series Power MOSFET

N-Channel Enhancement type

2SK2184 (F5S50VX2)

500V 5A

FEATURES

Input capacitance (C_{iss}) is small.
Especially, input capacitance at 0 bias is small.
The static $R_{ds(on)}$ is small.
The switching time is fast.

APPLICATION

Switching power supply of AC 100V input
High voltage power supply
Inverter


RATINGS

Absolute Maximum Ratings ($T_c = 25^\circ C$)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55 ~ 150	
Channel Temperature	T_{ch}		150	
Drain-Source Voltage	V_{DSS}		500	V
Gate-Source Voltage	V_{GSS}		± 30	
Continuous Drain Current (DC)	I_D		5	
Continuous Drain Current (Peak)	I_{DP}		15	A
Continuous Source Current (DC)	I_S		5	
Total Power Dissipation	P_T		50	W
Single Pulse Avalanche Current	I_{AS}	$T_{ch} = 25^\circ C$	5	A

OUTLINE DIMENSIONS

Case : STO-220

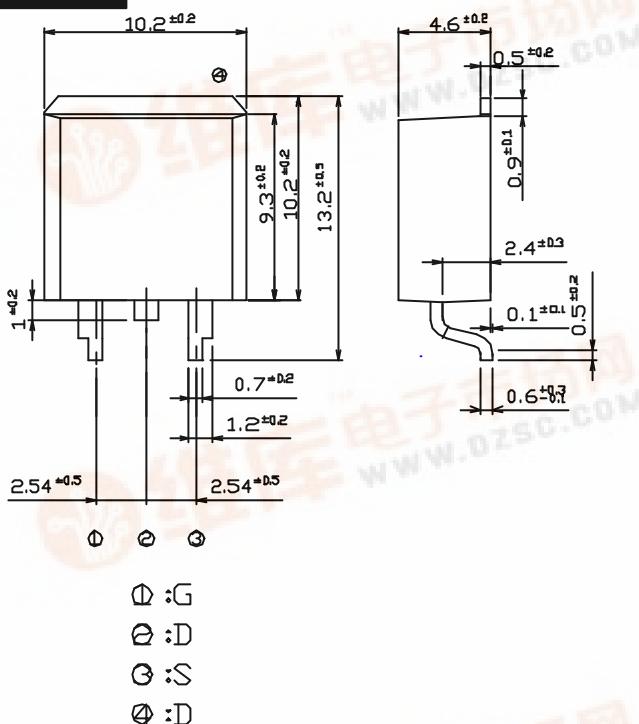

VX-2 Series Power MOSFET


2SK2184 (F5S50VX2)

● Electrical Characteristics $T_c = 25^\circ\text{C}$


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$\text{ID} = 1\text{mA}, \text{VGS} = 0\text{V}$	500			V
Zero Gate Voltage Drain Current	ID_{SS}	$\text{VDS} = 500\text{V}, \text{VGS} = 0\text{V}$			250	μA
Gate-Source Leakage Current	I_{GSS}	$\text{VGS} = \pm 30\text{V}, \text{VDS} = 0\text{V}$			± 0.1	
Forward Transconductance	g_{fs}	$\text{ID} = 2.5\text{A}, \text{VDS} = 10\text{V}$	1.5	3.8		S
Static Drain-Source On-state Resistance	$R_{\text{DS}(\text{ON})}$	$\text{ID} = 2.5\text{A}, \text{VGS} = 10\text{V}$		1.1	1.5	Ω
Gate Threshold Voltage	V_{TH}	$\text{ID} = 1\text{mA}, \text{VDS} = 10\text{V}$	2.5	3.0	3.5	V
Source-Drain Diode Forward Voltage	V_{SD}	$\text{IS} = 2.5\text{A}, \text{VGS} = 0\text{V}$			1.5	
Thermal Resistance	θ_{jc}	junction to case			2.5	$^\circ\text{C}/\text{W}$
Total Gate Charge	Q_g	$\text{VDD} = 400\text{V}, \text{VGS} = 10\text{V}, \text{ID} = 5\text{A}$		21		nC
Input Capacitance	C_{iss}	$\text{VDS} = 10\text{V}, \text{VGS} = 0\text{V}, f = 1\text{MHz}$		580		pF
Reverse Transfer Capacitance	C_{rss}			45		
Output Capacitance	C_{oss}			140		
Turn-On Time	t_{on}	$\text{ID} = 2.5\text{A}, \text{VGS} = 10\text{V}, \text{RL} = 60\Omega$		55	90	ns
Turn-Off Time	t_{off}			110	170	

2SK2184


Transfer Characteristics

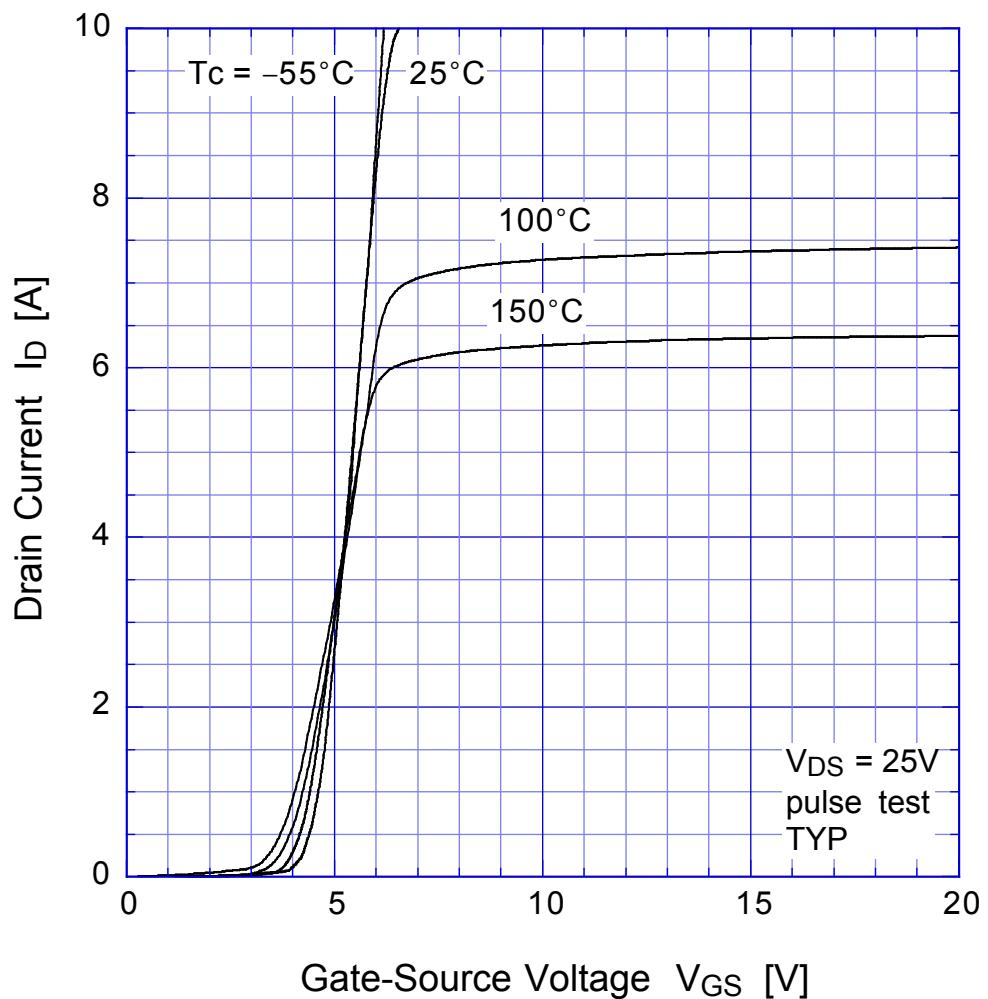


2SK2184 Static Drain-Source On-state Resistance

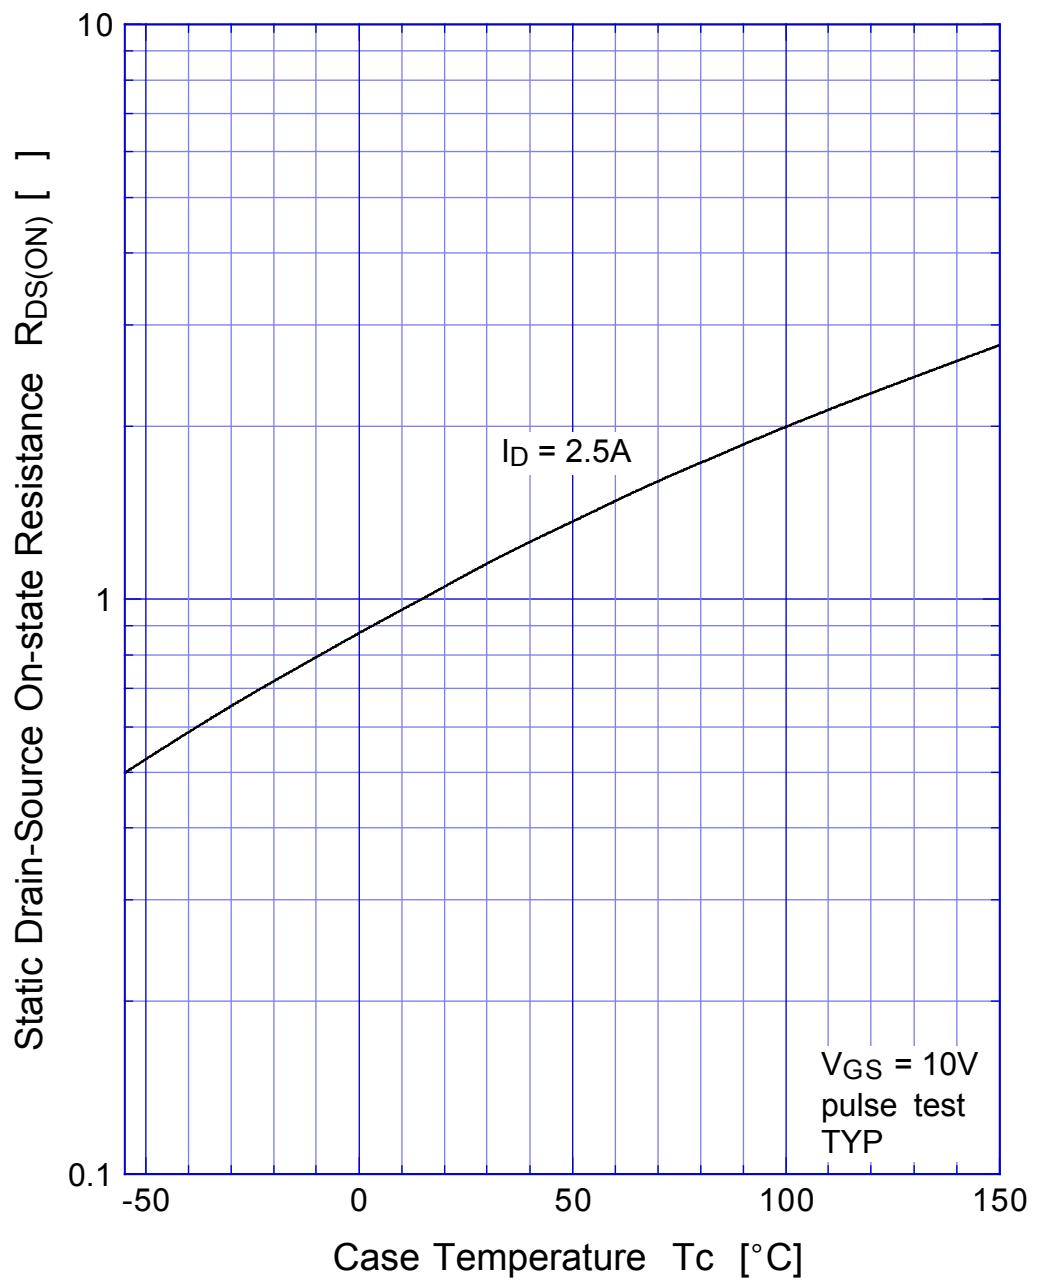


2SK2184 Gate Threshold Voltage

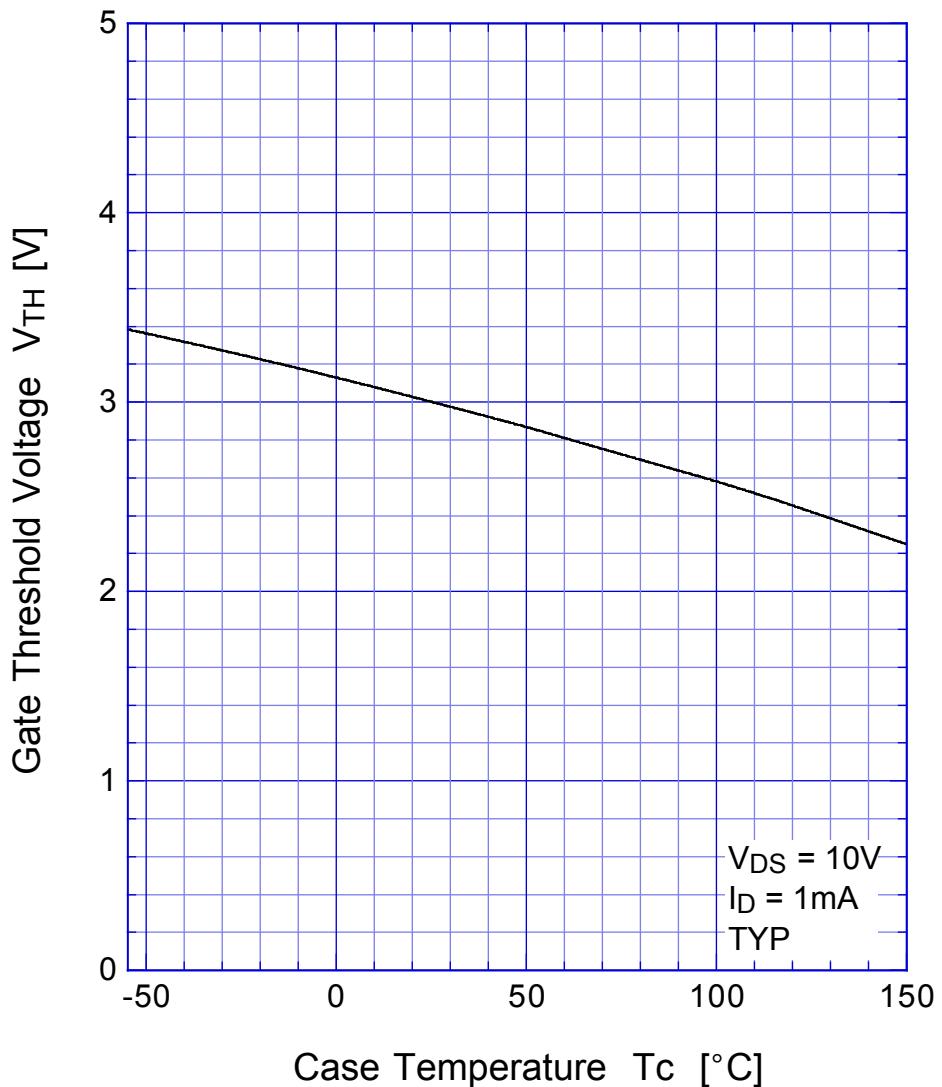


2SK2184 Safe Operating Area

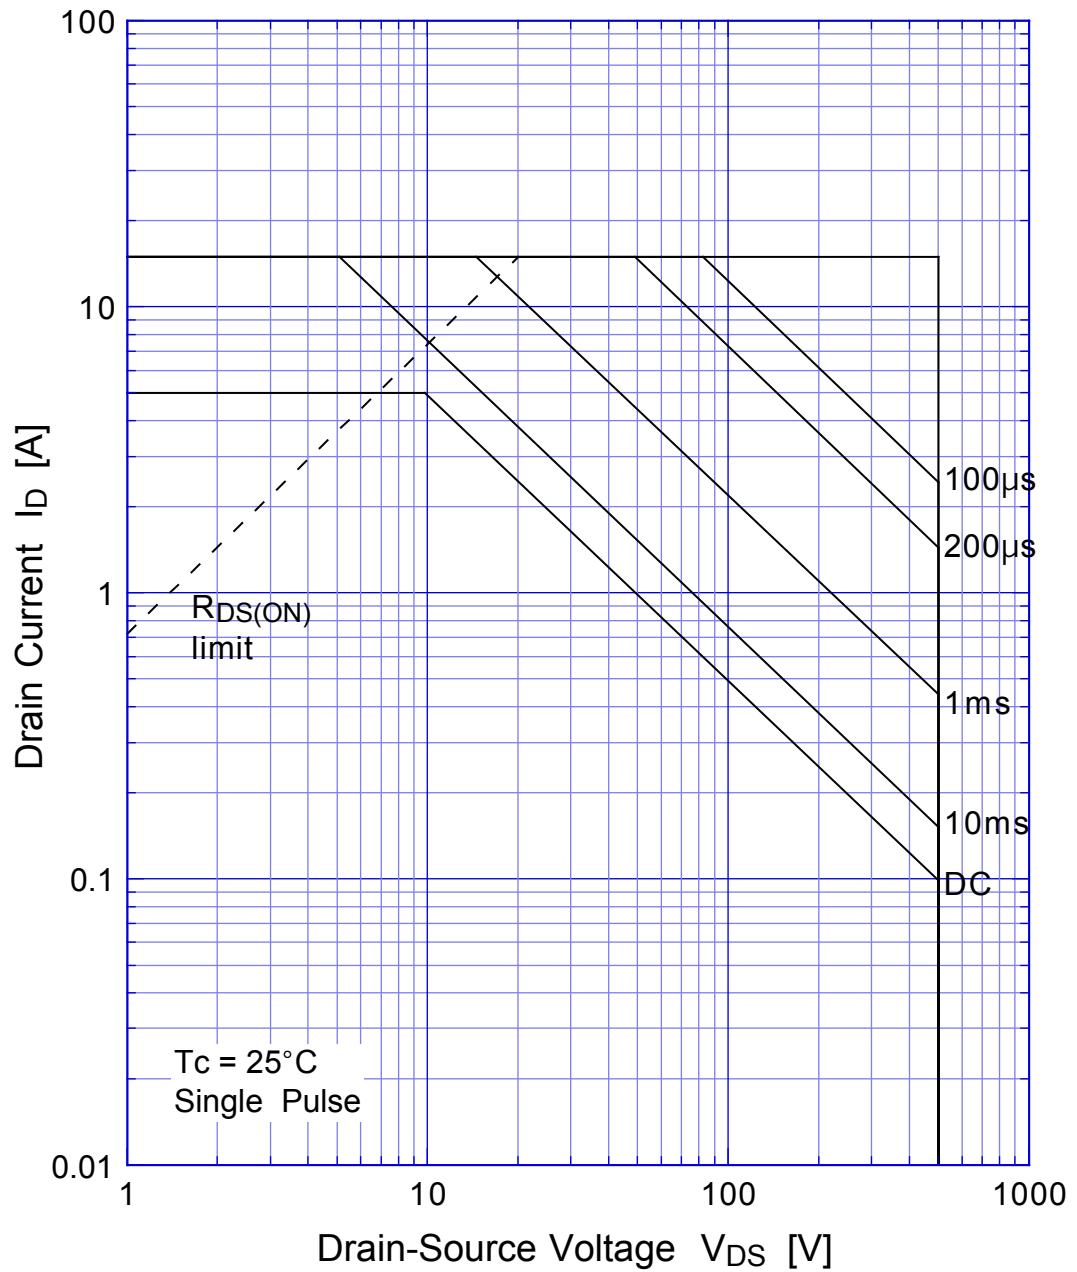

2SK2184 Transient Thermal Impedance

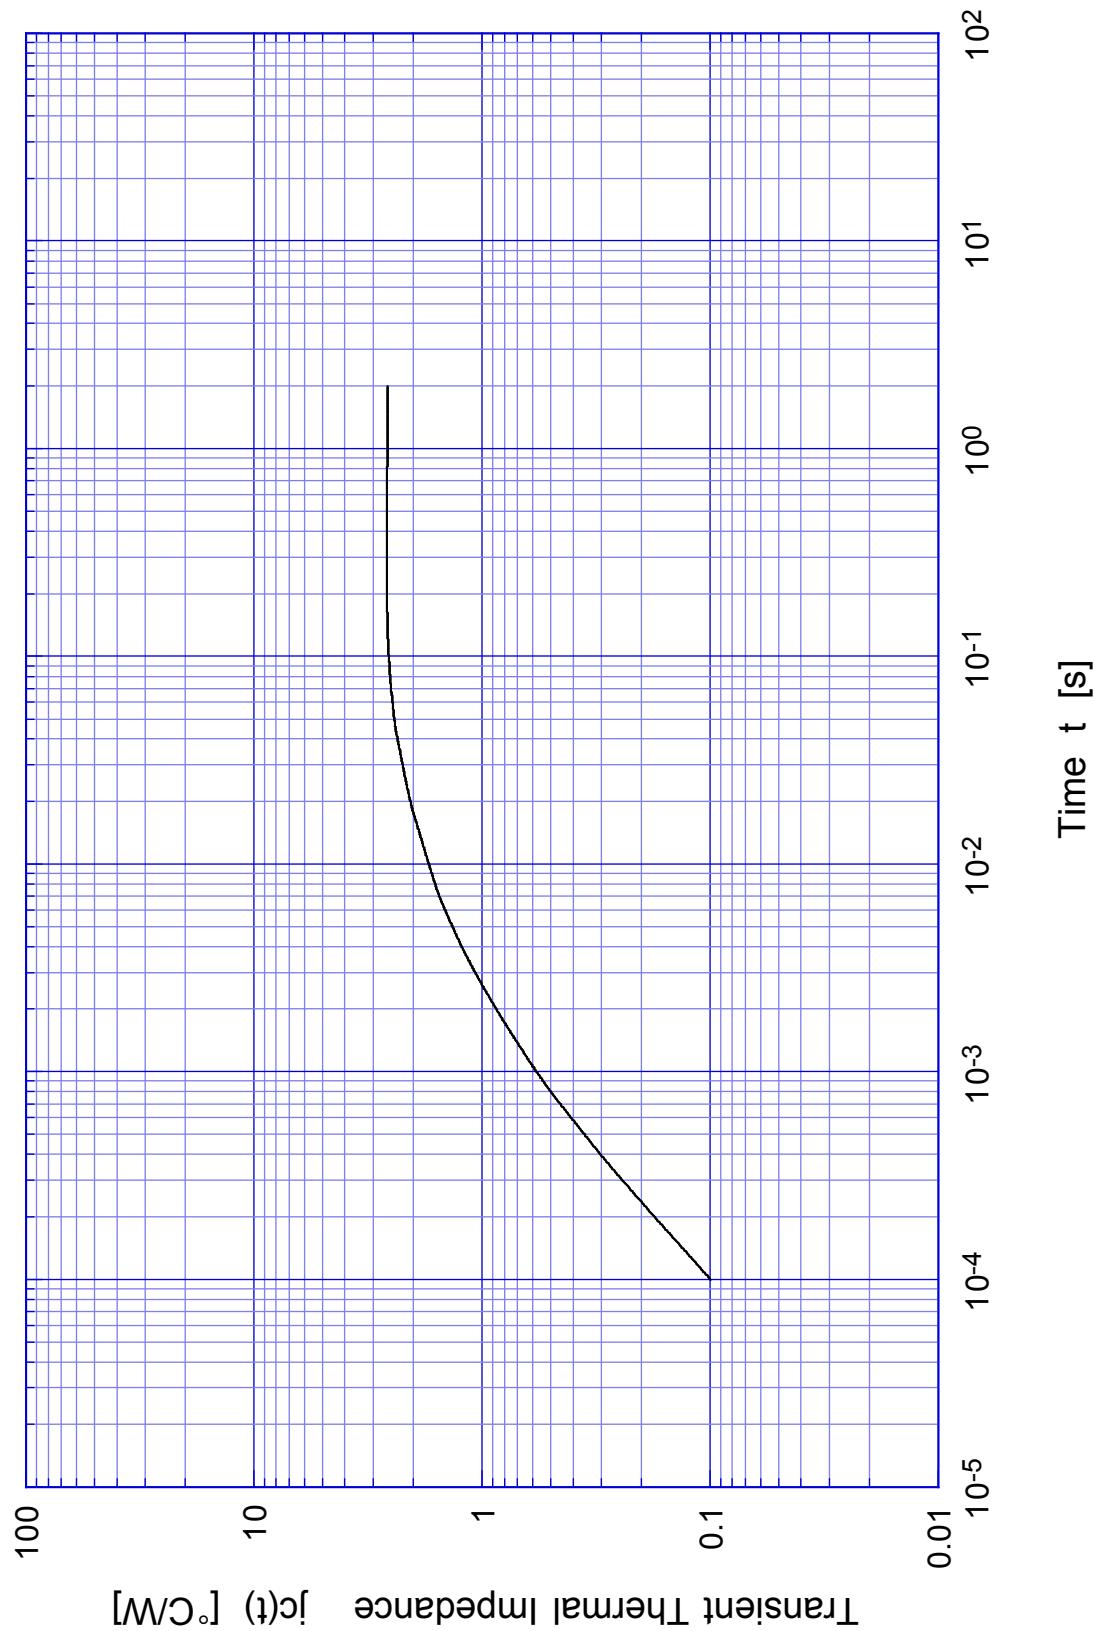


2SK2184 Capacitance

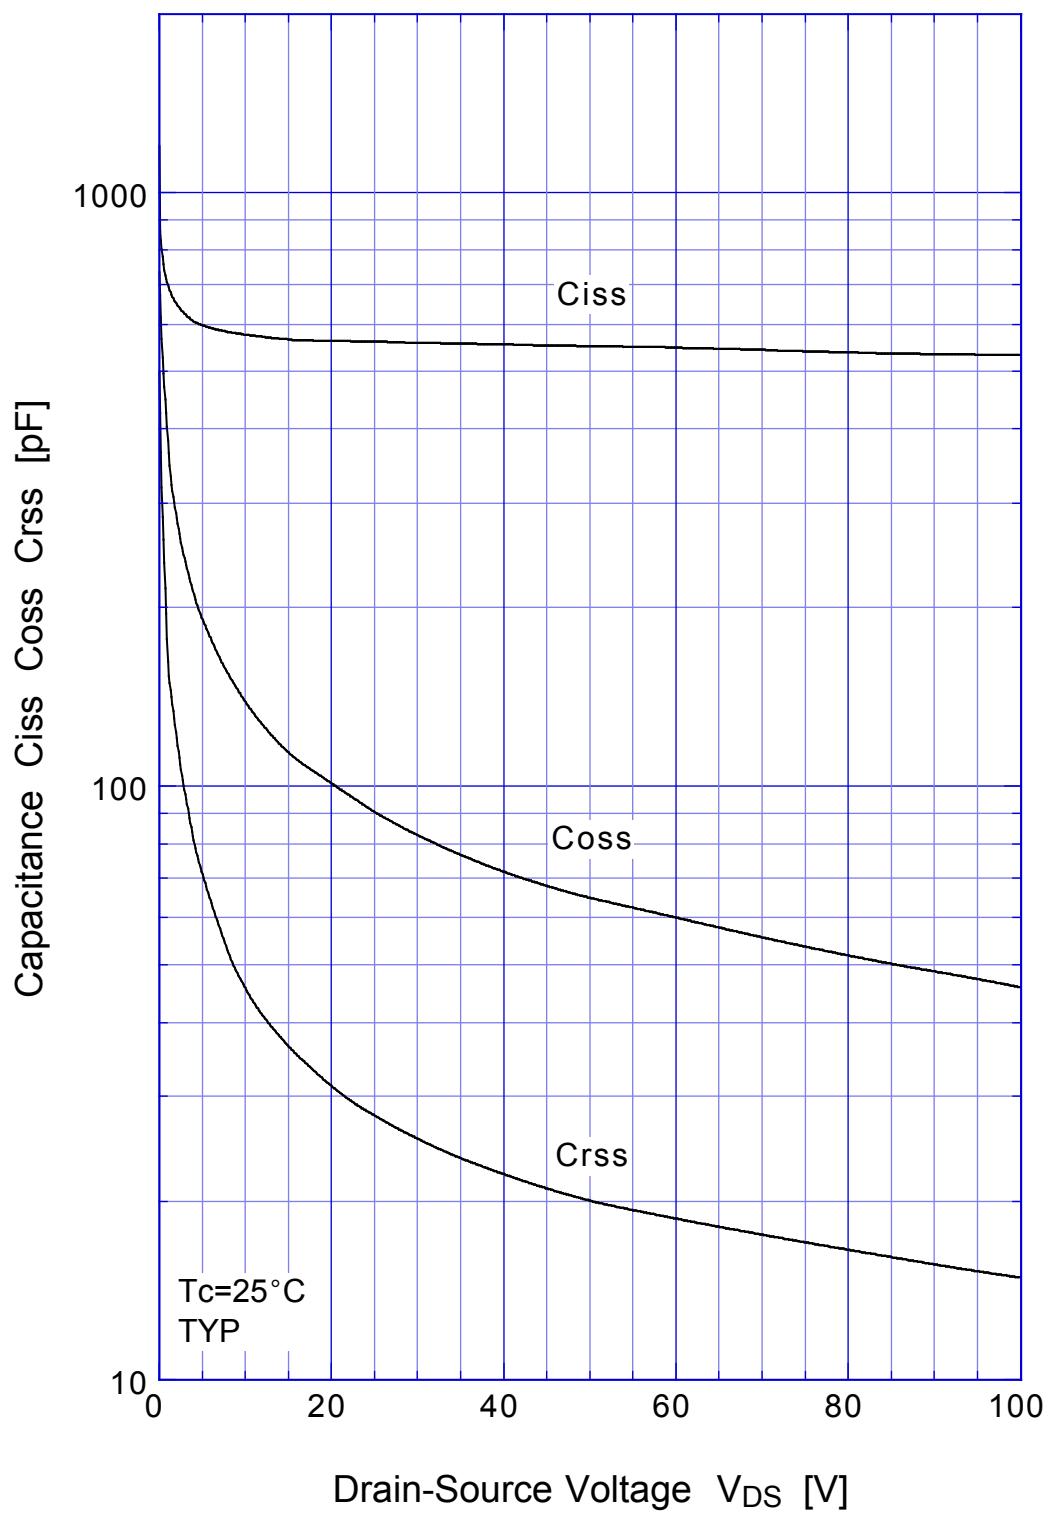

2SK2184

Power Derating

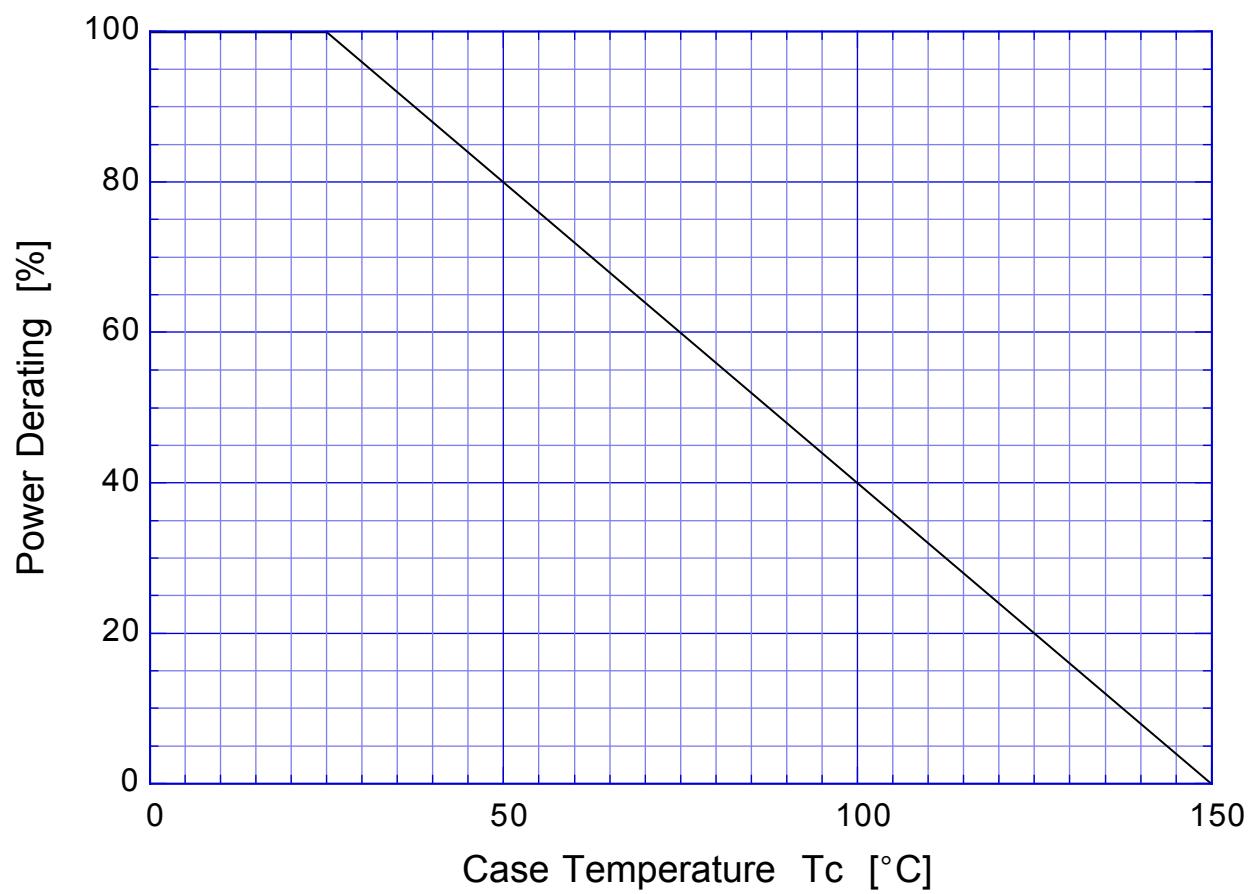

2SK2184

Gate Charge Characteristics

