

INTEGRAL ELECTRONICS (IEPE) PIEZOELECTRIC ACCELEROMETER

MODEL 2012A

- Measurement Range to 100 g
- Ground Isolation
- Low Impedance Output
- Top Connector
- Stud Mounted




actual size

Description


The VIP Sensors Model 2012A is a stud mounted piezoelectric accelerometer designed for general vibration measurement on structures and objects. It offers a measurement range to 100 g with a sensitivity of 50 mV/g. The accelerometer transmits its low impedance voltage output through the same cable that supplies the constant current power.

The Model 2012A design is sealed against external contamination. Signal return is isolated from the outer case of the unit. The accelerometer features a 10-32 top connector that is used with coaxial cable for error-free operation.


VIP Sensors Signal Conditioner Models 5005, 5100 and 5102 are recommended for use with this low impedance accelerometer.

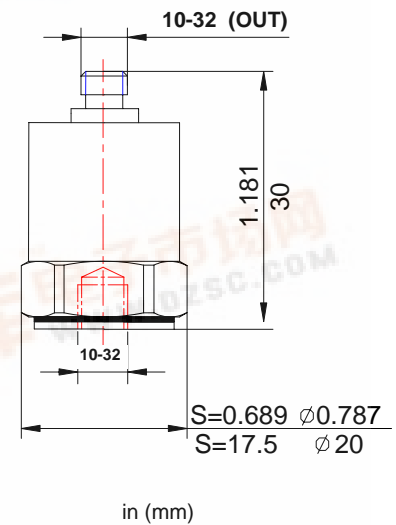

Typical Amplitude Response

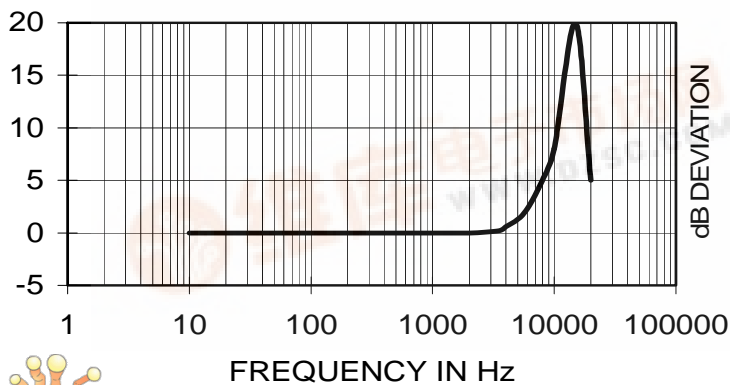

Typical Temperature Response

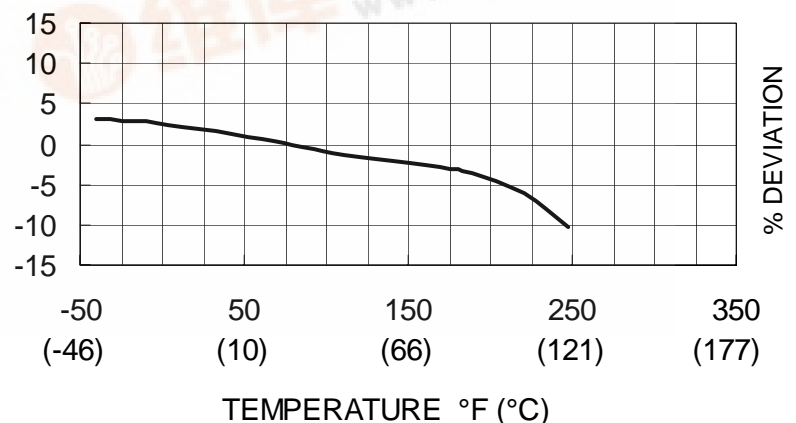

INTEGRAL ELECTRONICS (IEPE) PIEZOELECTRIC ACCELEROMETER

MODEL 2012A

SPECIFICATIONS

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

	UNITS	
DYNAMIC CHARACTERISTICS		
Range	g (m/s ²)	100 (980.7)
Voltage Sensitivity, typical	mV/g (mV/m/s ²)	50 (5.10)
Transverse Sensitivity	%	≤ 5
Frequency Response		See Typical Amplitude Response
Resonance Frequency	Hz	15,000
Amplitude Response		
± 5 %	Hz	1 – 3,500
± 1 dB	Hz	0.3 – 4,000
Temperature Response		See Typical Temperature Response
Amplitude Linearity	%	< 1
ELECTRICAL CHARACTERISTICS		
Output Polarity		Acceleration directed from base into the transducer defined as positive
Power Source Voltage (Constant Current)	VDC	+12 to +28
Supply Current	mA	2 to 10
Bias Voltage	V	7 ±1
Full Scale Output Voltage (peak)	Vp	≤ 5
Output Impedance	Ω	< 100
Noise	mg (mm/s ²)	< 0.8 (< 7.8)
Grounding		Signal return isolated from case
ENVIRONMENTAL CHARACTERISTICS		
Temperature Range		-4°F to 248°F (-20°C to +120°C)
Humidity		Epoxy sealed
Shock Limit	g pk (m/s ² pk)	1,000 (9807)
Base Strain	equiv. g /μstrain	0.0002
Magnetic Field Sensitivity	equiv. g rms /gauss (T)	2E-5 (2)
Thermal Transient Sensitivity	equiv. g /°C	0.008
PHYSICAL CHARACTERISTICS		
Weight	oz (grams)	0.9 (26)
Case Material		Stainless Steel
Mounting		10-32, torque 2 N-m (18 lbf-in)
Piezoelectric Material		PZT-5
Structure		Annular Shear
Output Connector		10-32 receptacle, top mounting
ACCESSORIES		
Included:		
9005L10	Coaxial Cable 10-32/BNC, 10ft (3.3 m)	
9504-8	10-32/10-32 Mounting Stud	
	Calibration Sheet	
Optional:		
9006L10	Coaxial Cable 10-32/10-32, 10 ft (3.3 m)	
9505-1	M5/10-32 Isolated Mounting Stud	

NOTES

- Short duration shock pulses, such as those generated by metal-to-metal impacts, may excite transducer resonance and cause linearity errors.