

Bulletin I27220 03/06

International IOR Rectifier

200MT40KPbF

THREE PHASE BRIDGE

Power Module

Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Low power loss
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- ULE78996 approved 
- TOTALLY LEAD-FREE


200 A

Description

It extends the existing range of MT...KB bridges an extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	Values	Units
I_o	200	A
@ T_c	85	°C
I_{FSM} @ 50Hz	1800	A
@ 60Hz	1880	
I^2t @ 50Hz	16.2	KA ² s
@ 60Hz	14.7	
$I^2\sqrt{t}$	162	KA ² √s
V_{RRM}	400	V
T_{STG} range	-40 to 150	°C
T_J range	-40 to 150	

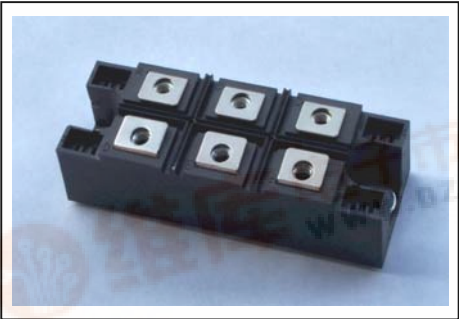

200MT40KPbF

Bulletin I27220 03/06

International
IR Rectifier**ELECTRICAL SPECIFICATIONS**

Voltage Ratings

Type number	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak reverse voltage V	I_{RRM} max. @ $T_J = 150^\circ\text{C}$ mA
200MT40KPbF	400	500	6

Forward Conduction

Parameter		200MT40KPbF	Units	Conditions			
I _O	Maximum RMS output current @ Case temperature	200	A	120° Rect conduction angle			
		85	°C				
I _{TSM}	Maximum peak, one-cycle forward, non-repetitive on state surge current	1800	A	t = 10ms	No voltage	Initial T _J = T _J max.	
		1880		t = 8.3ms	reapplied		
				1520	t = 10ms		100% V _{RRM}
					1590		t = 8.3ms
I ² t	Maximum I ² t for fusing	16.2	KA ² s	t = 10ms	No voltage		T _J = T _J max.
		14.7		t = 8.3ms	reapplied		
		11.6		t = 10ms	100% V _{RRM}		
		12.6		t = 8.3ms	reapplied		
I ² √t	Maximum I ² √t for fusing	162	KA ² √s	t = 0.1 to 10ms, no voltage reapplied			
V _{F(TO)}	Value of threshold voltage	0.76	V	@ T _J max.			
r _t	Slope resistance	2.4	mΩ				
V _{FM}	Maximum forward voltage drop	1.40	V	I _{pk} = 200A, T _J = 25°C, t _p = 400μs single junction			
V _{INS}	Insulation voltage	4000	V	T _J = 25°C all terminal shorted, f = 50Hz, t = 1s			

Thermal and Mechanical Specifications

Parameter	200MT40KPbF	Units	Conditions
T_J Maximum junction operating temperature range	- 40 to 150	$^\circ\text{C}$	
T_{stg} Maximum storage temperature range	-40 to 150	$^\circ\text{C}$	
R_{thJC} Maximum thermal resistance, junction to case	0.12 0.69 0.14 0.82	K/W	DC operation per module DC operation per junction 120° Rect conduction angle per module 120° Rect conduction angle per junction
R_{thCS} Maximum thermal resistance, case to heatsink	0.033	K/W	Per module. Mounting surface smooth, flat and greased. Heatsink compound thermal conductivity = 0.42W/mK
T Mounting torque ± 10% to heatsink	4 to 6	Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.
wt Approximate weight	176	g	Lubricated threads.


Ordering Information Table

Device Code

20	0	MT	40	K	PbF
1	2	3	4		5

- 1** - Current rating code: 20 = 200 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 = V_{RRM} (40 = 400V)
- 5** - PbF = Lead-Free

Outline Table (without optional barriers)

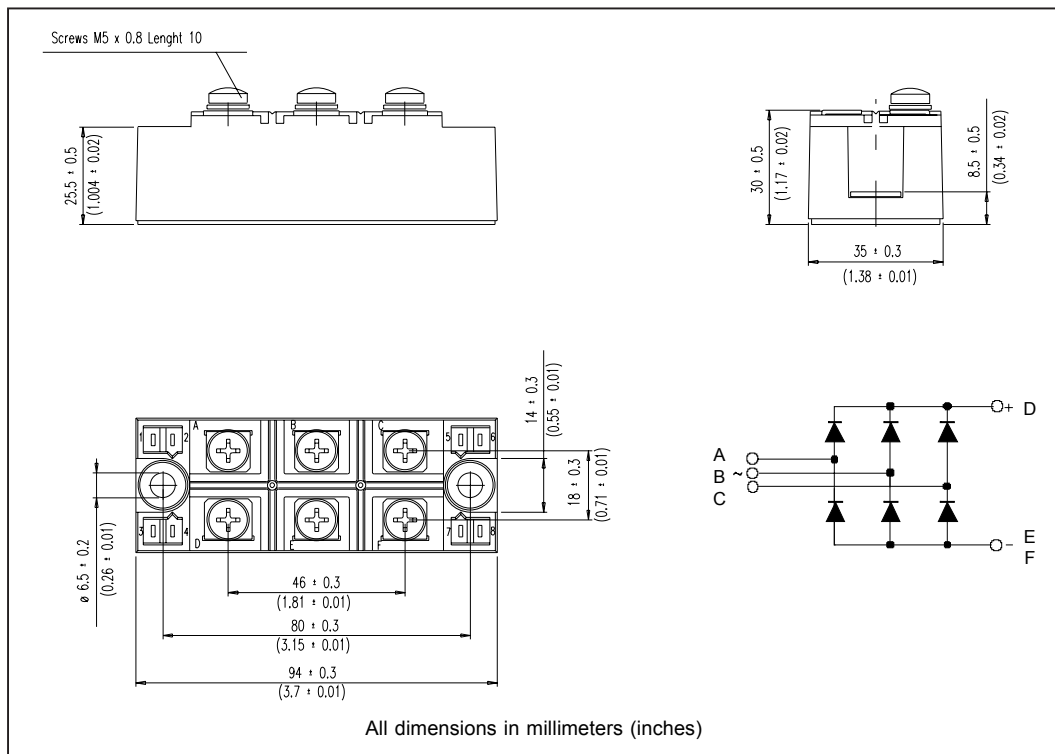

NOTE: To order the Optional Hardware see Bulletin I27900

200MT40KPbF

Bulletin I27220 03/06

International
IRF Rectifier

Outline Table (with optional barriers)

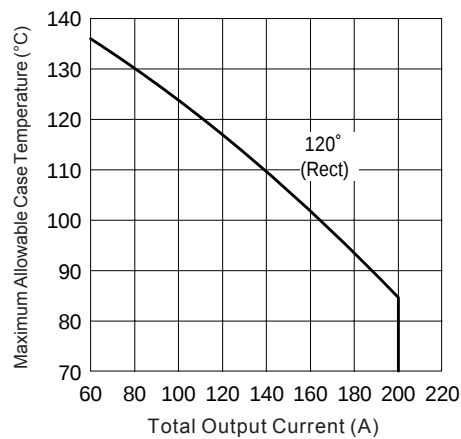
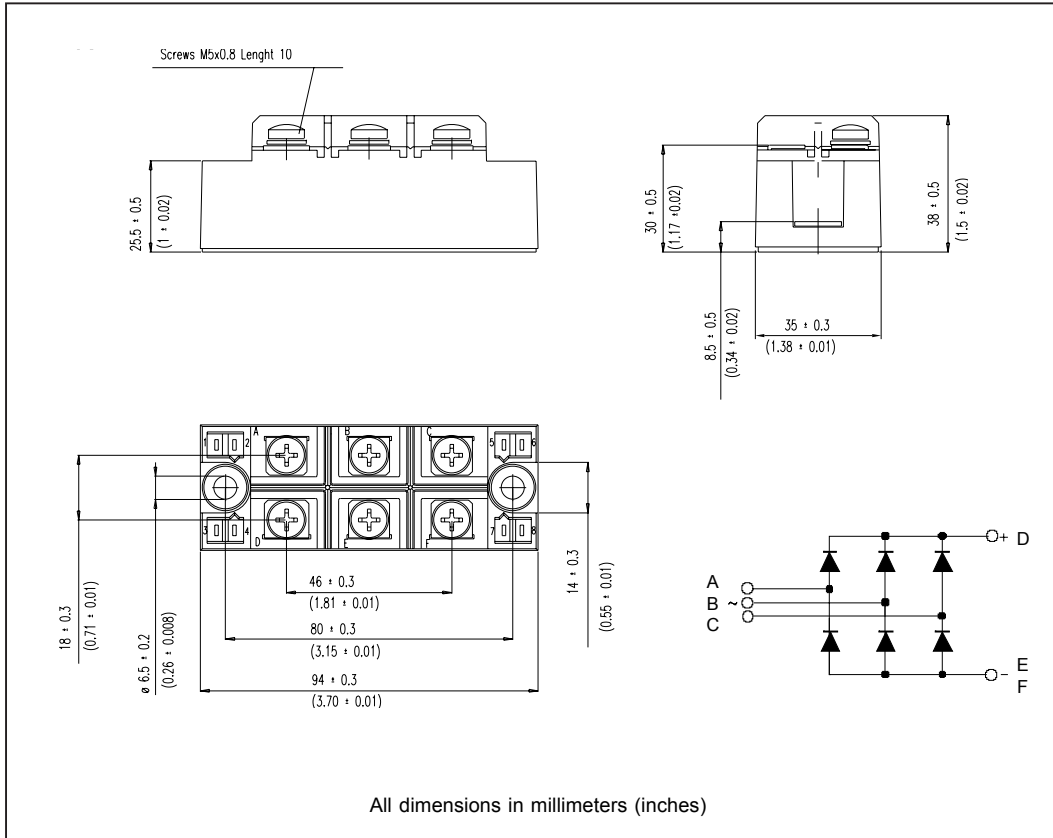


Fig. 1 - Current Rating Characteristics

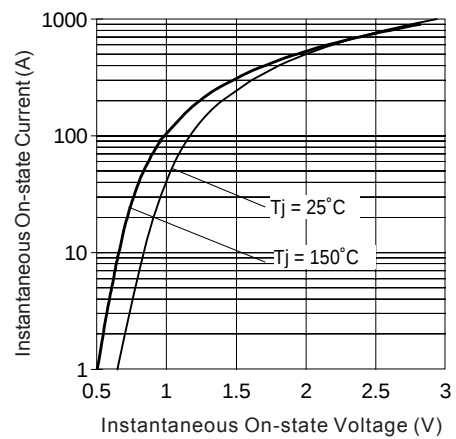


Fig. 2 - On-state Voltage Drop Characteristics

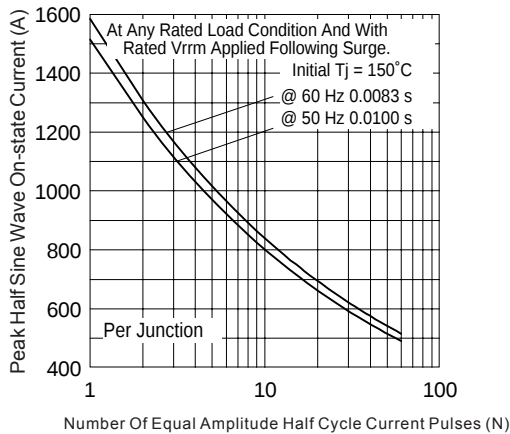


Fig. 3 - Maximum Non-Repetitive Surge Current

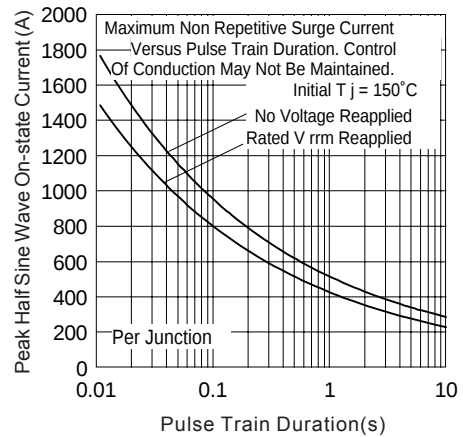


Fig. 4 - Maximum Non-Repetitive Surge Current

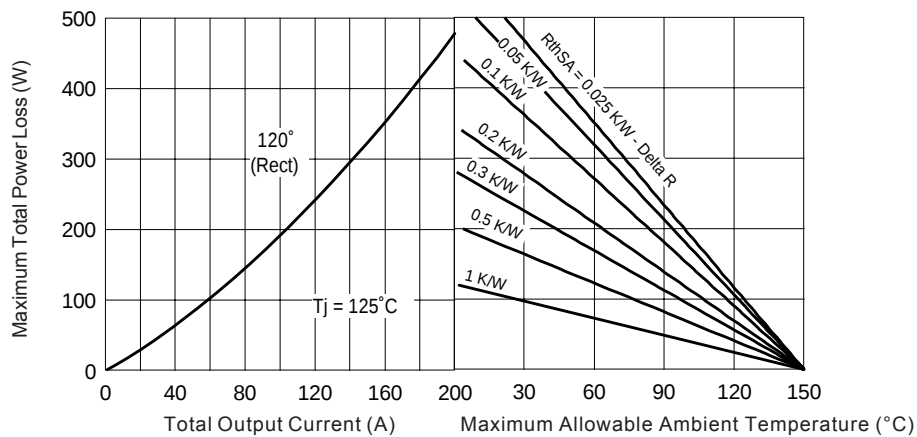


Fig. 5 - Current Rating Nomogram (1 Module Per Heatsink)

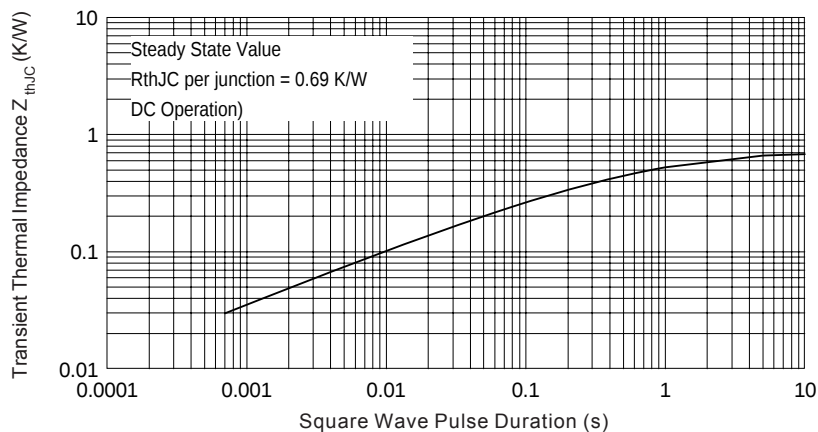


Fig. 6 - Thermal Impedance Z_{thJC} Characteristics

200MT40KPbF

Bulletin I27220 03/06

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/06